


P5GPL-X

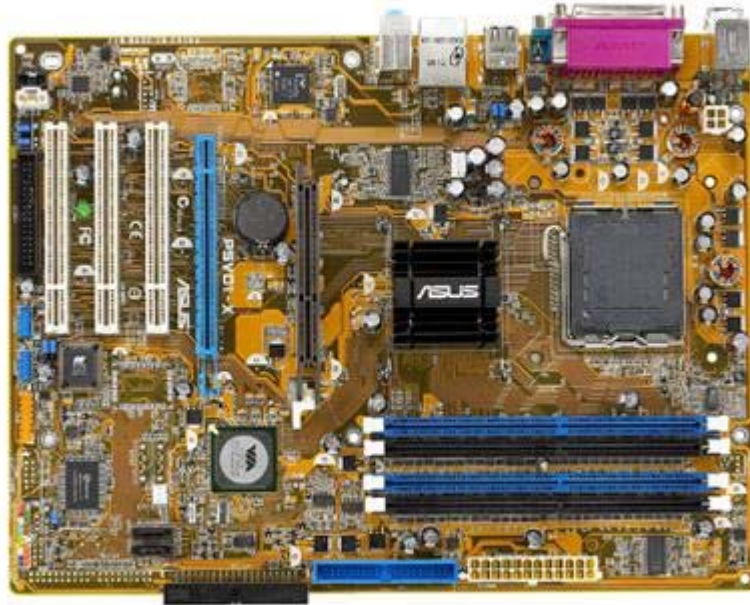

© 2005 ASUSTeK Computer Inc. All rights reserved.

Specification

CPU	LGA775 socket for Intel Pentium 4/Celeron CPU Compatible with Intel 04B and 04A processors Intel Hyper-Threading Technology ready Support Intel EM64T and EIST technology
Chipset	Intel 915PL Intel ICH6
Front Side Bus	800 / 533 MHz
Memory	Dual channel memory architecture 2 x 184-pin DIMM Sockets support max. 2GB DDR 400/333 non-ECC memory ASUS Hyper Path2 (Note: Due to chipset limitation, this motherboard supports a maximum of 2GB total memory)
Expansion Slots	Dual channel memory architecture 2 x 184-pin DIMM Sockets support max. 2GB DDR 400/333 non-ECC memory ASUS Hyper Path2 (Note: Due to chipset limitation, this motherboard supports a maximum of 2GB total memory)
Storage/RAID	Intel ICH6 South Bridge: 1 x UltraDMA 100/66/33 4 x Serial ATA
LAN	Intel 82540EM Gigabit LAN Controller

Audio	Intel 82540EM Gigabit LAN Controller
USB	Max. 8 USB 2.0 ports
Overclocking Features	AI Overclocking (intelligent CPU frequency tuner) ASUS CPU Lock Free Technology ASUS Hyper Path2 SFS (Stepless Frequency Selection) from 100MHz up to 400MHz at 1MHz increment Adjustable FSB/DDR ratio. Fixed PCI/PCI-E frequencies. ASUS C.P.R.(CPU Parameter Recall)
Other ASUS Special Features	CrashFree BIOS 2 ASUS EZ Flash MyLogo Q-Fan
BIOS	4 Mb Flash ROM,AMI BIOS, PnP, DMI2.0, WfM2.0, SM BIOS 2.3
Back Panel I/O Ports	1 x Parallel 1 x Serial 1 x S/PDIF Output 1 x PS/2 Keyboard 1 x PS/2 Mouse 1 x 6-Channel Audio I/O 1 x RJ45 4 x USB 2.0/1.1
Internal I/O Connectors	2 x USB 2.0 connector supports additional 4 USB ports CPU / Chassis Fan connectors 4 x SATA connector 1 x IDE connector Chassis Intrusion CD audio in 24-pin EATX Power connector 1 x S/PDIF out connector Front panel audio connector 4-pin ATX 12V Power connector Game/MIDI connector System panel connector
Industrial Standard	PCI 2.2
Support CD	Drivers ASUS PC Probe ASUS LiveUpdate Utility Anti-virus software (OEM version)
Accessories	User's manual 1 x Serial ATA cable 1 x SATA power cable 1 x UltraDMA 100/66 cable 1 x FDD cable 1 x I/O shield
Form Factor	ATX Form Factor, 12"x 7.2"(30.5cm x 18.3cm)