

Narrow Profile LINEAR REGULATED AC-DC single output Series A & B

- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty



Don't forget these facts about Acopian....

- 1. We ship within 3 Days (see our 3 Day Shipping Promise below).
- 2. Acopian power supplies last a <u>very long</u> <u>time</u>.
- 3. The Voltage Finder is the quickest way to find a power supply with the specs you need.
- 4. The Online System builder (www.acopian.com/SystemBuilder) is a convenient way to get your own custom Power System (and they ship within 9 Days).
- 5. You always talk to a real person when you call Acopian.
- 6. You can order your Acopian power supplies factory direct.
- 7. You can order your Acopian power supplies online.
- 8. All Acopian products are made in the USA.



Acopian Technical Company • Easton, PA
I-800-523-9478 • www.acopian.com
Order Factory Direct
Made in USA





Narrow Profile SINGLE OUTPUT

LINEAR REGULATED AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty

Where only a narrow mounting space is available, Acopian Narrow Profile power supplies fit where many others cannot. Choose from Series A (High Performance) and Series B (General Purpose) models with output ratings up to 150 volts, up to 3.5 amps.



Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Specifications: See table.

Series A: Model numbers begin with the letter A. Series B: Model numbers begin with the letter B.

Remote Voltage Adjustment/Sensing: Standard in Series A, not available in Series B.

Polarity: Output is floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.

Temperature Coefficient:

Series A: 0.015%/°C (Typical). Series B: 0.02%/°C (Typical).

Ambient Operating Temperature:

Series A: -20 to +71°C. Series B: $0 \text{ to } +71^{\circ}\text{C}$.

Storage Temperature: -55 to +85°C.

Overload/Short Circuit Protection:

Series A: Foldback current limiting with automatic

recovery.

Series B: Input fuse and output current limiting.


OPTIONS

Overvoltage Protection: An internal preset overvoltage protector is available. To order, add prefix "V" to the model number and add \$25.00 to the standard price of models with outputs of 1 to 70 volts; \$35.00, for 75 to 150 volt outputs.

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$25.00 to price. The "-230" option requires two additional days.



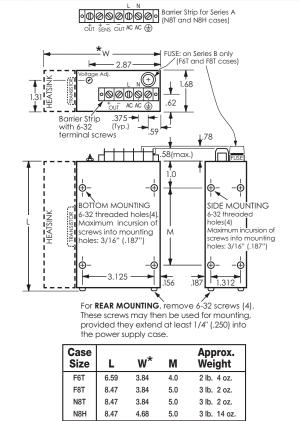

Size	L	W*	M	Weight				
F6T	6.59	3.84	4.0	2 lb. 4 oz.				
F8T	8.47	3.84	5.0	3 lb. 2 oz.				
N8T	8.47	3.84	5.0	3 lb. 2 oz.				
N8H	8.47	4.68	5.0	3 lb. 14 oz.				

*W dimension includes TRANSISTOR on F6T, F8T, and N8T cases and HEATSINK on N8H case.


Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 91.

NARROW PROFILE SINGLE OUTPUT

Nominal	Ad-	Output Current			Regulation		Ripple			
Output Voltage	just ±V	40°C	Amps. a	ıt 71°C	Load ± %*	Line ± %*	mV RMS	(\$) Price	Model	Case Size
1	.5	2.2	2.1	2.0	.005	.005	.250	200	A1NT220	N8T
1	.5	3.5	3.5	3.0	.005	.005	.250	235	A1NT350	N8H
1.5	.5	2.2	2.1	2.0	.005	.005	.250	200	A1.5NT220	N8T
1.5	.5 .5	3.5 2.2	3.5 2.1	3.0 2.0	.005	.005	.250	235	A1.5NT350 A2NT220	N8H N8T
2	.5 .5	3.0	3.0	3.0	.005 .005	.005	.250 .250	235	A2NT300	N8H
3	.5	1.0	1.0	1.0	.5	.1	1	165	B3TN100	F6T
3	.5 .5	2.2 3.5	2.1 3.5	2.0 3.0	.005	.005	.250 .250	200 235	A3NT220 A3NT350	N8T N8H
3.3	.5	1.0	1.0	1.0	.5	.1	1	165	B3.3TN100	F6T
3.3	.5	2.2	2.1	2.0	.005	.005	.250	200	A3.3NT220	N8T
3.3 5	.5 .5	3.5 1.0	3.5 1.0	3.0 1.0	.005	.005	.250 1	235 160	A3.3NT350 B5TN100	N8H F6T
5	.5 .5	1.1	1.0	1.0	.005	.005	.250	170	A5TN100	N8T
5	.5	2.2	2.1	2.0	.005	.005	.250	200	A5NT220	N8T
5	.5	3.5	3.5	3.0	.005	.005	.250	235	A5NT350	N8H
6	.5	1.0	1.0	1.0	.1	.1	1	165	B6TN100	F6T
6 6	.5 .5	2.2 2.7	2.1 2.7	2.0 2.7	.005	.005	.250 .250	200 235	A6NT220 A6NT270	N8T N8H
7	1	1.0	1.0	1.0	.1	.1	1	165	B7TN100	F6T
7	.5	1.1	1.0	1.0	.005	.005	.250	185	A7TN100	N8T
7	.5	2.0	2.0	2.0	.005	.005	.250	220	A7NT200	N8H
8	1	1.0	1.0	1.0	.1	.1	1	165	B8TN100	F6T
8	.5	1.1 2.0	1.0 2.0	1.0 2.0	.005	.005	.250	185 220	A8TN110 A8NT200	N8T
8	.5	_	_		.005	.005	.250			N8H
9 9	1 .5	1.0 1.1	1.0 1.0	1.0 1.0	.1 .005	.1 .005	1 .250	165 185	B9TN100 A9TN110	F6T N8T
9	.5	2.0	2.0	2.0	.005	.005	.250	220	A9NT200	N8H
10	1	1.0	1.0	1.0	.1	.1	1	170	B10TN100	F6T
10	.5	1.1	1.0	1.0	.005	.005	.250	185	A10TN110	N8T
10	.5	2.0	2.0	2.0	.005	.005	.250	220	A10NT200	N8H
11 11	1 .5	1.0 1.1	1.0 1.0	.750 1.0	.1 .005	.1 .005	1 .250	170 185	B11TN100 A11TN110	F6T N8T
11	.5	2.0	2.0	2.0	.005	.005	.250	220	A11NT200	N8H
12	1	1.0	1.0	.750	.1	.1	1	170	B12TN100	F6T
12	.5	1.1	1.0	1.0	.005	.005	.250	185	A12TN110	N8T
12	.5	2.0	2.0	2.0	.005	.005	.250	220	A12NT200	N8H
13 13	1	1.0	1.0	.750 1.0	.1	.1 .005	1 .250	170	B13TN100 A13TN110	F6T N8T
13	.5 .5	1.1 2.0	1.0 2.0	2.0	.005	.005	.250	185 220	A131N110 A13NT200	N8H
14	1	1.0	1.0	.750	.1	.1	1	170	B14TN100	F6T
14	.5	1.1	1.0	1.0	.005	.005	.250	185	A14TN110	N8T
14	.5	2.0	2.0	2.0	.005	.005	.250	220	A14NT200	N8H
15	1	1.0	1.0	.750	.1	.1	1	170	B15TN100	F6T
15 15	.5 .5	1.1 2.0	1.0 2.0	1.0 2.0	.005	.005	.250 .250	185 220	A15TN110 A15NT200	N8T N8H
16	1	1.0	1.0	.750	.1	.1	1	170	B16TN100	F6T
16	.5	1.0	1.0	1.0	.005	.005	.250	185	A16TN100	N8T
16	.5	1.75	1.75	1.75	.005	.005	.250	220	A16NT175	N8H
18	1_	.750	.750	.750	.1	.1	1	170	B18TN75	F6T
18 18	.5 .5	1.0 1.5	1.0 1.5	1.0 1.5	.005	.005	.250 .250	185 220	A18TN100 A18NT150	N8T N8H
20	1	.500	.500	.500	.1	.1	.250	155	B20TN50	F6T
20	.5	.900	.900	.900	.005	.005	.250	185	A20TN90	N8T
20	.5	1.25	1.25	1.25	.005	.005	.250	220	A20NT125	N8H
24	1	.750	.750	.750	.1	.1	1	170	B24TN75	F6T
24	.5	1.0	1.0	1.0	.005	.005	.250	200	A24TN100	N8T
24	.5	1.25	1.25	1.25	.005	.005	.250	225	A24NT125	N8H EET
25 25	1 .5	.750 .750	.750 .750	.750 .750	.1 .005	.05 .005	.250	170 200	B25TN75 A25TN75	F6T N8T
25	.5	1.25	1.25	1.25	.005	.005	.250	225	A25NT125	N8H
*or 2 my		hover i								


	Nominal Ad		- Output Current			Regulation Ripple					
	Output j	just	$\overline{}$	Amps. at					(\$)		
26	Voltage	±V	40°C	55°C	71°C	± %	± %	RMS	Price	Model	Size
28		-									
1	28	1	.700	.700	.700	.1	.05	1	170	B28TN70	F6T
30											
30	28	.5	1.25	1.25	1.25	.005	.005	.250	225	A28NT125	N8H
30								l .			
32											
32						_	_				-
34								1 1		A32TN60	N8T
35											
35							_				
35											
36											
36											-
36		-									
38											
40											-
40											
45 .5 .600 .600 .600 .005 .055 .250 225 A4SNT60 N8T 48 1 .400 .400 .400 .05 .05 1 .200 B48TN40 F6T 48 .5 .500 .500 .500 .005 .05 1 200 A48NT50 N8T 50 1 .400 .400 .400 .005 .05 1 210 B50FT40 F6T 50 1 .450 .450 .450 .055 .05 1 210 B50FT40 F6T 55 1 .400 .400 .400 .005 .05 .1 175 B65FT20 F6T 60 1 .150 .150 .150 .05 .05 1 175 B60FT15 F6T 60 1 .150 .150 .05 .05 1 175 B65FT10 F6T 65		-									
48 1 .400 .400 .05 .05 1 200 B48TN40 F6T 48 .5 .500 .500 .500 .005 .05 1 200 B48TN40 R8T 50 1 .400 .400 .400 .05 .05 1 210 B50FT40 F6T 50 1 .400 .400 .400 .005 .05 1 175 B50FT40 F6T 55 1 .200 .200 .200 .05 .05 1 175 B50FT20 F6T 60 1 .150 .150 .05 .05 1 175 B60FT15 F6T 60 1 .150 .150 .05 .05 1 175 B60FT15 F6T 60 1 .150 .150 .05 .05 1 175 B60FT15 F6T 65 1 .100 .100 .05											
48	45	.5	.600	.600	.600	.005	.005	.250	_	A45NT60	
50 1 .450 .450 .005 .005 .250 .250 A50NT45 N8T 55 1 .200 .200 .200 .05 .05 .1 .175 B55FT20 F6T 55 1 .400 .400 .400 .005 .05 .250 .250 A55NT40 N8T 60 1 .150 .150 .150 .05 .05 .1 .175 B60FT15 F6T 60 1 .150 .150 .05 .05 .1 .176 B65FT15 F6T 65 1 .100 .100 .05 .05 .1 .170 B65FT10 F6T 65 1 .270 .270 .005 .05 .1 .170 B65FT10 F6T 66 1 .270 .270 .270 .055 .05 1 .170 B65FT20 .887 65 1 .100 .100								l .			
55 1 .200 .200 .05 .05 1 175 B55FT20 F6T 55 1 .400 .400 .400 .005 .055 .250 250 A55NT40 N8T 60 1 .150 .150 .150 .05 .05 .250 .250 A60NT35 N8T 65 1 .100 .100 .05 .05 .1 170 B65FT10 F6T 65 1 .250 .250 .250 .05 .05 .1 215 B65FT25 F8T 65 1 .270 .270 .270 .005 .05 .250 250 A65NT27 N8T 65 1 .270 .270 .270 .005 .05 .250 250 A65NT27 N8T 67 1 .100 .100 .100 .05 .05 1 170 B76FT10 F6T 70 1 .250	50	1	.400	.400	.400	.05	.05	1	210	B50FT40	F6T
55 1 .400 .400 .005 .005 .250 250 A55NT40 N8T 60 1 .150 .150 .150 .05 .05 1 175 B60FT15 F6T 60 1 .350 .350 .350 .005 .05 1 175 B65FT10 F6T 65 1 .100 .100 .05 .05 1 170 B65FT10 F6T 65 1 .270 .270 .005 .05 1 215 B65FT25 F8T 65 1 .270 .270 .005 .05 1 217 B65FT20 F8T 65 1 .270 .270 .005 .05 1 210 B65FT25 F8T 66 1 .270 .270 .005 .05 1 210 B65FT25 F8T 67 1 .100 .100 .05 .05 1 <td>50</td> <td>1</td> <td>.450</td> <td>.450</td> <td>.450</td> <td>.005</td> <td>.005</td> <td>.250</td> <td>250</td> <td></td> <td>N8T</td>	50	1	.450	.450	.450	.005	.005	.250	250		N8T
60 1 .150 .150 .05 .05 1 175 B60FT15 F6T 60 1 .350 .350 .350 .005 .055 .250 250 A60NT35 N8T 65 1 .100 .100 .05 .05 1 170 B65FT10 F6T 65 1 .250 .250 .250 .05 .05 1 215 B65FT25 F8T 65 1 .270 .270 .005 .05 .1 215 B65FT25 F8T 65 1 .270 .270 .055 .05 1 170 B67FT10 F6T 67 1 .100 .100 .05 .05 1 170 B67FT10 F6T 70 1 .250 .250 .250 .055 .1 210 B87FT10 F6T 75 1 .250 .250 .250 .055 1	55	1	.200	.200	.200	.05	.05	1	175	B55FT20	F6T
60 1 .350 .350 .350 .005 .055 .250 250 A60NT35 N8T 65 1 .100 .100 .05 .05 1 170 B65FT10 F6T 65 1 .250 .250 .250 .05 .05 1 215 B65FT25 F8T 65 1 .270 .270 .200 .055 .05 1 170 B65FT25 F8T 665 1 .270 .270 .200 .055 .05 1 170 B67FT10 F6T 70 1 .100 .100 .05 .05 1 170 B76FT10 F6T 70 1 .250 .250 .250 .055 .05 1 170 B76FT10 F6T 75 1 .250 .250 .250 .055 .05 1 210 B80FT10 F8T 75 1 .2	55	1	.400	.400	.400	.005	.005	.250	250	A55NT40	N8T
65 1 .100 .100 .05 .05 1 170 B65FT10 F6T 65 1 .250 .250 .05 .05 .1 215 B65FT25 F8T 65 1 .270 .270 .005 .005 .250 250 A65NT27 N8T 67 1 .100 .100 .100 .05 .05 1 170 B67FT10 F6T 70 1 .100 .100 .100 .05 .05 1 170 B70FT10 F6T 70 1 .250 .250 .250 .055 .05 1 170 B70FT10 F6T 75 1 .220 .200 .200 .05 .05 1 210 B75FT20 F8T 75 1 .220 .220 .250 .055 1 180 B80FT10 F6T 80 1 .200 .200 .20	60	1	.150	.150	.150	.05	.05	1	175	B60FT15	F6T
65 1 .250 .250 .05 .05 .1 215 B65FT25 F8T 65 1 .270 .270 .270 .005 .005 .250 250 A65NT27 N8T 67 1 .100 .100 .100 .05 .05 1 .170 B67FT10 F6T 70 1 .100 .100 .05 .05 1 .170 B70FT10 F6T 70 1 .250 .250 .250 .05 .05 .1 .170 B70FT10 F6T 75 1 .220 .200 .05 .05 .1 .210 B75FT20 F8T 75 1 .220 .250 .250 .055 .1 .180 B80FT10 F6T 80 1 .100 .100 .05 .05 1 .180 B80FT10 F8T 80 1 .250 .250 .250	60	1	.350	.350	.350	.005	.005	.250	250	A60NT35	N8T
65 1 .270 .270 .005 .005 .250 250 A65NT27 N8T 67 1 .100 .100 .100 .05 .05 1 170 B67FT10 F6T 70 1 .100 .100 .100 .05 .05 1 170 B70FT10 F6T 70 1 .250 .250 .250 .05 .05 .1 170 B70FT10 F6T 70 1 .250 .250 .250 .05 .05 .1 .10 .05 .85 75 1 .250 .250 .250 .05 .05 .1 .10 .05 .85 80 1 .200 .200 .200 .05 .05 .1 .180 B80FT10 F6T 80 1 .200 .200 .200 .05 .05 .1 .180 B80FT20 F8T 80 1 <td></td> <td></td> <td>.100</td> <td>.100</td> <td>.100</td> <td></td> <td></td> <td>1</td> <td></td> <td>B65FT10</td> <td></td>			.100	.100	.100			1		B65FT10	
67 1 .100 .100 .05 .05 1 170 B67FT10 F6T 70 1 .100 .100 .05 .05 1 170 B70FT10 F6T 70 1 .250 .250 .250 .005 .05 1 170 B70FT10 F6T 75 1 .250 .250 .250 .05 .05 .1 210 B75FT20 F8T 75 1 .250 .250 .250 .05 .05 .1 210 B75FT20 F8T 80 1 .100 .100 .05 .05 1 180 B80FT10 F6T 80 1 .220 .200 .200 .05 .05 1 180 B80FT10 F6T 80 1 .250 .250 .250 .055 1 210 B80FT20 F8T 80 1 .250 .250 .250 <td></td>											
70 1 .100 .100 .05 .05 1 170 B70FT10 F6T 70 1 .250 .250 .250 .005 .005 .250 250 A70NT25 N8T 75 1 .200 .200 .250 .05 .05 1 210 B75FT20 F8T 75 1 .250 .250 .250 .05 .05 1 210 B80FT10 F6T 80 1 .100 .100 .05 .05 1 210 B80FT10 F6T 80 1 .200 .200 .05 .05 1 210 B80FT20 F8T 80 1 .250 .250 .250 .055 .05 1 218 B80FT20 F8T 85 1 .250 .250 .250 .055 1 185 B90FT10 F6T 90 1 .200 .200 .200						-					_
70 1 .250 .250 .005 .005 .250 250 A70NT25 N8T 75 1 .200 .200 .200 .05 .05 1 210 B75FT20 F8T 75 1 .250 .250 .250 .005 .05 1 210 B75FT20 R8T 80 1 .100 .100 .05 .05 1 180 B80FT10 F6T 80 1 .200 .200 .05 .05 1 210 B80FT20 F8T 80 1 .250 .250 .250 .055 .05 1 210 B80FT20 F8T 80 1 .250 .250 .250 .055 .05 1 185 B90FT20 F8T 85 1 .250 .250 .250 .055 1 215 B90FT10 F6T 90 1 .200 .200 .2	67	1	.100	.100	.100	.05	.05	1	170		F6T
75 1 .200 .200 .200 .05 .05 1 210 B75FT20 F8T 75 1 .250 .250 .250 .005 .005 .250 250 A75NT25 N8T 80 1 .100 .100 .05 .05 1 210 B80FT10 F6T 80 1 .200 .200 .200 .05 .05 1 210 B80FT10 F6T 80 1 .220 .250 .250 .05 .05 1 210 B80FT10 F6T 80 1 .250 .250 .250 .05 .05 .250 250 A80NT25 N8T 85 1 .250 .250 .250 .05 .1 185 B90FT10 F6T 90 1 .200 .200 .200 .05 .05 1 215 B90FT20 F8T 95 1 .2											
75 1 .250 .250 .005 .005 .250 250 A75NT25 N8T 80 1 .100 .100 .05 .05 1 180 B80FT10 F6T 80 1 .200 .200 .05 .05 1 210 B80FT20 F8T 80 1 .250 .250 .250 .005 .05 .250 250 A80NT25 N8T 85 1 .250 .250 .250 .005 .05 1 185 B90FT10 F6T 90 1 .100 .100 .05 .05 1 185 B90FT10 F6T 90 1 .200 .200 .200 .05 .05 1 215 B90FT20 F8T 95 1 .200 .200 .200 .05 .05 1 220 B95FT20 F8T 95 1 .200 .200 .2						_					
80 1 .200 .200 .05 .05 1 210 B80FT20 F8T 80 1 .250 .250 .250 .005 .005 .250 250 A80NT25 N8T 85 1 .250 .250 .250 .005 .05 .250 250 A85NT25 N8T 90 1 .100 .100 .05 .05 1 185 B90FT10 F6T 90 1 .200 .200 .05 .05 1 215 B90FT20 F8T 90 1 .220 .250 .250 .055 .05 1 215 B90FT20 F8T 95 1 .200 .200 .05 .05 .1 220 B95FT20 F8T 95 1 .200 .200 .005 .05 1 220 B95FT20 F8T 95 1 .200 .200 .005								l .			
80 1 .250 .250 .250 .005 .250 .250 .480NT25 N8T 85 1 .250 .250 .250 .005 .005 .250 .250 .485NT25 N8T 90 1 .100 .100 .05 .05 1 .185 B90FT10 F6T 90 1 .200 .200 .200 .05 .05 1 .215 B90FT20 F8T 90 1 .250 .250 .250 .05 .05 .1 .215 B90FT20 F8T 95 1 .200 .200 .200 .05 .05 1 .220 B95FT20 F8T 95 1 .200 .200 .200 .05 .05 1 .220 B95FT20 R8T 100 1 .100 .100 .05 .05 1 .210 B100FT10 F6T 100 1 .200	80	1	.100	.100	.100	.05	.05	1	180	B80FT10	F6T
85 1 .250 .250 .005 .005 .250 250 A85NT25 N8T 90 1 .100 .100 .05 .05 1 185 B90FT10 F6T 90 1 .200 .200 .05 .05 1 215 B90FT20 F8T 90 1 .250 .250 .250 .005 .05 .250 .250 A90NT25 N8T 95 1 .200 .200 .200 .05 .05 1 220 B95FT20 F8T 95 1 .200 .200 .05 .05 .1 220 B95FT20 F8T 95 1 .200 .200 .05 .05 .1 .210 B95FT20 F8T 95 1 .200 .200 .05 .05 .1 .210 B100FT10 F6T 100 .1 .200 .200 .200 .05 .05 .1 .210 B100FT20	80	1									
90 1 .100 .100 .100 .05 .05 1 185 B90FT10 F6T 90 1 .200 .200 .200 .05 .05 1 215 B90FT20 F8T 90 1 .250 .250 .250 .005 .005 .250 .250 .250	80	1	.250	.250	.250	.005	.005	.250	250	A80NT25	N8T
90 1 .200 .200 .05 .05 1 215 B90FT20 F8T 90 1 .250 .250 .250 .005 .005 .250 255 A90NT25 N8T 95 1 .200 .200 .200 .05 .05 1 220 B95FT20 F8T 95 1 .200 .200 .200 .05 .05 .05 250 A95NT20 N8T 100 1 .100 .100 .100 .05 .05 1 210 B100FT10 F6T 100 1 .200 .200 .200 .05 .05 1 210 B100FT20 F8T 100 1 .200 .200 .200 .05 .05 1 225 B100FT20 F8T 100 1 .200 .200 .200 .05 .05 1 210 B110FT10 F6T 115	85	1	.250	.250	.250	.005	.005	.250	250	A85NT25	N8T
90 1 .250 .250 .250 .005 .0250 .250 A90NT25 N8T 95 1 .200 .200 .200 .05 .05 1 .220 B95FT20 F8T 95 1 .200 .200 .200 .005 .05 .250 .250 A95NT20 N8T 100 1 .100 .100 .100 .05 .05 1 .210 B100FT10 F6T 100 1 .200 .200 .200 .05 .05 1 .225 B100FT20 F8T 100 1 .200 .200 .200 .05 .05 1 .225 B100FT20 F8T 100 1 .200 .200 .200 .05 .05 .1 .210 B110FT10 F6T 110 1 .100 .100 .05 .05 1 .210 B110FT10 F6T 115 1								1			
95 1 .200 .200 .200 .05 .05 1 220 B95FT20 F8T 95 1 .200 .200 .005 .005 .250 250 A9SNT20 N8T 100 1 .100 .100 .05 .05 1 210 B100FT10 F6T 100 1 .200 .200 .05 .05 1 225 B100FT20 F8T 100 1 .200 .200 .05 .05 .05 250 260 A100NT20 N8T 110 1 .100 .100 .100 .05 .05 1 210 B110FT10 F6T 115 1 .100 .100 .100 .05 .05 1 210 B110FT10 F6T 120 1 .050 .050 .050 .05 .05 1 210 B115FT10 F6T 120 1 .200											
95 1 .200 .200 .005 .005 .250 250 A95NT20 N8T 100 1 .100 .100 .05 .05 1 210 B100FT10 F6T 100 1 .200 .200 .05 .05 1 225 B100FT20 F8T 100 1 .200 .200 .005 .055 1 225 B100FT20 R8T 110 1 .200 .200 .050 .055 .05 1 210 B110FT10 F6T 115 1 .100 .100 .05 .05 1 210 B110FT10 F6T 120 1 .050 .050 .05 .05 1 210 B115FT10 F6T 120 1 .050 .050 .05 .05 .1 205 B120FT05 F6T 120 1 .200 .200 .200 .05 .05					_	_		_			_
100 1 .100 .100 .05 .05 1 210 B100FT10 F6T 100 1 .200 .200 .05 .05 1 225 B100FT20 F8T 100 1 .200 .200 .005 .005 .250 260 A100NT20 N8T 110 1 .100 .100 .100 .05 .05 1 210 B110FT10 F6T 115 1 .100 .100 .05 .05 1 210 B115FT10 F6T 120 1 .050 .050 .050 .05 .05 1 210 B115FT10 F6T 120 1 .050 .050 .050 .05 .05 1 205 B120FT05 F6T 120 1 .200 .200 .200 .055 .055 1 235 B120FT20 F8T 120 1 .200 .200											
100 1 .200 .200 .05 .05 1 .225 B100FT20 F8T 100 1 .200 .200 .005 .005 .250 260 A100NT20 N8T 110 1 .100 .100 .100 .05 .05 1 210 B110FT10 F6T 115 1 .100 .100 .05 .05 1 210 B115FT10 F6T 120 1 .050 .050 .05 .05 1 205 B120FT05 F6T 120 1 .200 .200 .05 .05 .05 1 205 B120FT05 F6T 120 1 .200 .200 .05 .05 .05 1 235 B120FT20 F8T 120 1 .200 .200 .200 .05 .05 .250 260 A120NT20 N8T 125 1 .205 .05		1				-			_	B100FT10	_
110 1 .100 .100 .05 .05 1 210 B110FT10 F6T 115 1 .100 .100 .05 .05 1 210 B115FT10 F6T 120 1 .050 .050 .05 .05 1 205 B120FT05 F6T 120 1 .200 .200 .05 .05 1 235 B120FT20 F8T 120 1 .200 .200 .200 .005 .055 .250 260 A120NT20 N8T 125 1 .050 .050 .05 .05 .05 1 205 B125FT05 F6T 125 1 .200 .200 .05 .05 .05 1 205 B125FT05 F6T 125 1 .200 .200 .200 .05 .05 1 235 B125FT20 F8T 125 1 .200 .200								1			
115 1 .100 .100 .05 .05 1 210 B115FT10 F6T 120 1 .050 .050 .05 .05 1 205 B120FT05 F6T 120 1 .200 .200 .200 .05 .05 1 235 B120FT20 F8T 120 1 .200 .200 .200 .05 .05 .250 260 A120NT20 N8T 125 1 .050 .050 .05 .05 1 205 B125FT05 F6T 125 1 .200 .200 .200 .05 .05 1 205 B125FT05 F6T 125 1 .200 .200 .200 .05 .05 1 235 B125FT20 F8T 125 1 .200 .200 .200 .005 .055 .250 260 A125NT20 N8T 150 1 .100	100	1	.200	.200	.200	.005	.005	.250	260	A100NT20	N8T
120 1 .050 .050 .050 .05 .05 1 205 B120FT05 F6T 120 1 .200 .200 .05 .05 1 235 B120FT20 F8T 120 1 .200 .200 .005 .005 .250 260 A120NT20 N8T 125 1 .050 .050 .05 .05 .05 1 205 B125FT05 F6T 125 1 .200 .200 .05 .05 1 235 B125FT20 F8T 125 1 .200 .200 .005 .055 .05 1 235 B125FT20 F8T 125 1 .200 .200 .005 .005 .250 260 A125NT20 N8T 150 1 .100 .100 .100 .05 .05 1 .225 B150FT10 F8T	110	1	.100	.100	.100	.05	.05	1	210	B110FT10	F6T
120 1 .200 .200 .05 .05 1 235 B120FT20 F8T 120 1 .200 .200 .005 .005 .055 .250 260 A120NT20 N8T 125 1 .050 .050 .05 .05 .05 1 205 B125FT05 F6T 125 1 .200 .200 .05 .05 1 235 B125FT20 F8T 125 1 .200 .200 .005 .005 .05 .250 260 A125NT20 N8T 150 1 .100 .100 .100 .05 .05 1 225 B150FT10 F8T	115	1	.100	.100	.100	.05	.05	1	210	B115FT10	F6T
120 1 .200 .200 .05 .05 1 235 B120FT20 F8T 120 1 .200 .200 .005 .005 .050 .250 260 A120NT20 N8T 125 1 .050 .050 .05 .05 .05 1 205 B125FT05 F6T 125 1 .200 .200 .05 .05 1 235 B125FT20 F8T 125 1 .200 .200 .005 .005 .05 .250 260 A125NT20 N8T 150 1 .100 .100 .100 .05 .05 1 225 B150FT10 F8T	120	1	.050	.050	.050	.05	.05	1	205	B120FT05	F6T
125 1 .050 .050 .05 .05 1 205 B125FT05 F6T 125 1 .200 .200 .05 .05 1 235 B125FT20 F8T 125 1 .200 .200 .005 .005 .250 260 A125NT20 N8T 150 1 .100 .100 .100 .05 .05 1 225 B150FT10 F8T										B120FT20	
125 1 .200 .200 .05 .05 1 235 B125FT20 F8T 125 1 .200 .200 .005 .005 .05 .250 260 A125NT20 N8T 150 1 .100 .100 .100 .05 .05 1 .225 B150FT10 F8T	120	1	.200	.200	.200	.005	.005	.250	260	A120NT20	N8T
125 1 .200 .200 .200 .005 .005 .250 260 A125NT20 N8T 150 1 .100 .100 .05 .05 1 .225 B150FT10 F8T											
150 1 .100 .100 .100 .05 .05 1 225 B150FT10 F8T											
						-					-
1 100 100 100 100 100 100 100 100 100 100 100 100 100 100 100 100 100 100											
		2000	.100	.100	.100	.000	.000	.200	200	ATOURTIU	1401

^{*}or 2 mv, whichever is greater



WALL MOUNTING KITS ...\$10

These kits provide a way of mounting power supplies on a wall or panel when the other side of the mounting surface is inaccessible. Each kit consists of four aluminum brackets and four machine screws for fastening them to the power supply, effectively adding mounting flanges to the power supply.



REAR MOUNTING

Locking

For Gold Box and modular High Voltage power supplies:

GB8 Mounting Kit (#8-32 mounting holes)

Can be used on these case sizes:

CM6, CM9, CM13, CH11, CH16, DG5, DG6, DG9, G3, G5, G5D, G6, G9, G13, GT5, GT6, GT9, GT13, H8, H11, H16, HD345, HD355, HA349, HA359, HT11, HT16, LM6A*, LM8A*, LM10A*, M6, M9, M13, RM6, RW6 TG5, TG6, TG9, TG13, TH11, WG7, WM6, WM9, Y3, Y5, Y6, YH11, YA

*For rear mounting brackets horizontally on LM cases only, use GBR Mounting Kit...\$15

For Narrow Profile power supplies:

NP6 Mounting Kit (#6-32 mounting holes)

Can be used on these case sizes:

AMC, CN8T, DN6B, DN6A, DN8A, DN8, F6T, F8T, N8T, WL9, WN6A, WN6B, WN8, WN8A, TN6T

NP6L Mounting Kit (#6-32 mounting holes)

Model NP6L consists of two brackets 1.5" long as shown above. and two 2.5" long brackets (to extend beyond heat sink).

Can be used on these case sizes:

CN8H, N8H, TN8H



DIN RAIL MOUNTING KITS ...\$15

NPH35DIN Mounting Kit (Horizontal mounting)

Can be used on these case sizes:

CN8H DN6A F6T N8H TN6T WN6A WN6B1

CN8T DN6B F8T N8T TN8H DN8 WN8

WN8A DN8A

NPV35DIN Mounting Kit (Vertical mounting)

Can be used on these case sizes:

CN8H DN6A F6T N8H TN6T WN6A

CN8T DN6B F8T N8T TN8H WN6B WN8

DN8 DN8A

WN8A WL35DIN Mounting Kit (Vertical mounting)

Can be used on these case sizes: WL7, WL9


WLH35DIN Mounting Kit (Horizontal mounting) Can be used on these case sizes: WL7, WL9

NPR35DIN Mounting Kit (Rear mounting)

Can be used on these case sizes:

CN8H F6T N8H TN6T

CN8T F8T N8T TN8H



GR35DIN Mounting Kit (Rear mounting)

Can be used on these case sizes: CM6 DG5 G3 GT5 HD345 M6 RM6 TG5

CM9 DG6 G5 GT6 HD355 М9 RW6 TG6 TG9

DG9 G5D GT9

G6 G9

(Can be used, but not recommended on case sizes: G13, GT13, M13, TG13)

CH35DIN Mounting Kit (Horizontal mounting) Can be used on these case sizes: RM6, RW6

WH35DIN Mounting Kit (Horizontal mounting) Can be used on these case sizes: WM6, WM9




CM13 DG9



LR35DIN Mounting Kit (Rear mounting)

LH35DIN Mounting Kit (Horizontal mounting) Can be used on these case sizes: LM6A, LM8A, LM10A





CM6 DG5 G3 GT5 TG5 Y3 M6 CM9 DG6 G5 GT6 M9 TG6 Y5

> G5D GT9 M13 TG9 G6 **GT13**

G9 G13









About Acopian's 3 Day Shipment Guarantee:

In 1964, Acopian initiated its "3 Day Shipping Guarantee." Since then our product offerings have expanded to include many more lines of power supplies that ship within 3 Days as well as others that ship within 6 or 9 Days. These guarantees apply to every model in the Acopian catalog.

Our unique 3-day shipping guarantee has prompted many questions. Below are some of those most often asked:

What does Acopian's 3-day shipping promise mean?

It means that power modules listed in this catalog are shipped within 3 days after we receive your order. High Voltage, Redundant, Rack Mounting, Systems and certain Switching power supplies are shipped within 9 days.

Has Acopian ever failed to meet this promise? Never.

Do options affect shipping time?

The 230 volt input option and moisture/fungus-proofing option require two additional days. All other options do not affect shipping time.

Is the 3-day promise affected by quantity? Suppose we need 50 or 100 pieces? The 3-day promise applies to orders for five or less modules. (Two or less for 9-day items). If requested, Acopian will ship five pieces of a larger order in 3 days and, with consideration of your requirement, schedule the balance. (Since each shipment is processed and priced as a separate order, for lowest prices request shipment in one lot.)

What if I need four or five different models? Does the 3-day promise still apply? Yes. Guaranteed 3-day shipment applies to one model or to a combination of models.

Do I have to ask for 3-day shipment of my order?

3-day shipment is automatic. In fact, you must tell us if you want the shipment delayed.

How long after you ship will I have the power supplies?

Transportation time varies with the carrier used. Unless otherwise requested, Acopian ships small orders by UPS Ground.

You say Acopian has never failed to meet the 3-day promise. How do you do it? Our facilities have been designed and equipped to meet our 3-day shipment promise. When your order is received, your power supplies are built specifically for you and shipped within three days. We do not ship from stock. (For this reason, we are unable to accept returns for credit.)

I've seen other power supply manufacturers advertise "same-day shipment." Isn't that better than 3-day shipment?

A typical vendor's "same-day shipment" advertisement can only be fulfilled if the power supplies you need are in stock. Otherwise, a four to six week delay is not unusual before inventory is replenished and your order is shipped.

Acopian's 3-day shipment promise applies to ALL 3 Day models (larger units ship within 9 Days) and is not dependent on the quantity in stock. We build each unit after the order for that unit is received. If an order is needed faster, often times we can ship in less than 3 days.

If you require shipment even earlier than our standard promise, just let us know, we can usually ship sooner. We welcome the opportunity to work with you.

ACOPIAN...

...answers your phone call with a live salesperson

No automated menus. The person who answers your call will courteously and promptly answer your questions, quote price and delivery, expedite your urgent requirements, and offer you immediate access to our engineers. Call toll free 800-523-9478.

...can customize power supplies for you

If a standard power supply does not meet all of your requirements, speak with one of our engineers. We can often modify the specifications, ratings and configuration of a supply. We can also combine several power supplies into a Multiple Output Power System with the operating features you specify (such as meters and switches) and ship it within 9 Days!

...has a 5-year warranty

This is typical: One of our customers sent us an old power supply with a note indicating that the supply had been in continuous use since 1972 (33 years!), but he had recently noticed that the output voltage was low. We found that the capacitors had dried up, replaced them and returned the supply to the customer, who thanked us and said he intends to keep using it. We focus on making power supplies that will last a long time. There are power supplies that cost less than ours, or that are smaller than ours, but you won't find any that last longer than ours. All too often, low-priced supplies are densely packed, run hot, have short lifetimes and short warranties. All Acopian metal-cased power products have a 5-year warranty, but you can expect them to last a lot longer.

Purchase Acopian... 3-day shipment, long lasting power supplies, and unsurpassed customer service.

"In my business, Acopian is referred to as bulletproof. It never fails and lasts forever."

- Steve Andrews, President Technical Options, Inc.

"If Acopian made automobiles, I'd buy one without question."

- David A. Price, Research Technologist Georgia Tech Research Institute

ORDERING INFORMATION & Terms and Conditions

ACOPIAN SELLS FACTORY DIRECT WORLDWIDE: We do not use representatives or distributors. Contact Acopian for technical information or a quote.

WARRANTY: Acopian power supplies are warranted to be free from defects in material and workmanship for a period of five years (encapsulated devices, for one year) from date of original shipment. Acopian's obligation under this warranty is limited to repairing any power supply returned to the factory Service Department in Easton, PA and replacing any defective parts. Mini Encapsulated power supplies are not repairable. Authorization must be obtained from Acopian before a power supply may be returned for repair. Units must be well packed when shipping to Acopian; the repair of any damage incurred during shipment will be charged. Transportation charges are to be paid by the purchaser. A reinspection and handling charge will be applied to returned units found to have no defects. If a failure has been caused by misuse, operation in excess of specifications, or modification by the customer, repairs will be billed at cost; in such cases, a cost estimate will be submitted before work is started.

Acopian reserves the right to make changes or improvements in its products without incurring any obligation to install the same on products previously manufactured.

This warranty is in lieu of all other warranties, obligations, and liabilities, expressed or implied, and is the purchaser's exclusive remedy. Acopian makes no warranty, either express or implied, of merchantability, fitness for a particular purpose or otherwise. In no event shall Acopian be liable whether in contract, tort, or negligence, for special, indirect, incidental or consequential damages of any kind, including loss of business or profits, or any other losses incurred by the purchaser or any third party, the Customer's remedies being limited, at Acopian's option, to replacement, repair or credit at the price on the date of claim.

The validity, performance and construction of all terms and conditions and any sale made by Acopian shall be determined by the law of Pennsylvania, without regard to its conflict of law principles, and all parties to the transaction expressly consent to the jurisdiction of such courts and consent to the venue of the Court of Common Pleas for Northampton County, Pennsylvania.

PRICES: The prices shown are F.O.B. our factory; Easton, PA. or Melbourne, FL.. All prices and specifications are subject to change without notice. Minimum order is \$50.00.

TERMS: Net 30 days, subject to credit approval. Visa, MasterCard and American Express also accepted.

SHIPPING: Location permitting, small shipments are made by United Parcel Service, or by Parcel Post; larger shipments, by insured motor freight collect. Shipments can be made by air upon request. Risk of loss shall be F.O.B. Our Factory, even in cases where freight may be prepaid or allowed to destination by Acopian. If equipment is received in damaged condition, it is the customer's responsibility to contact the carrier and file a claim for damages.

TIME FOR DELIVERY: The time for delivery quoted by Acopian is the time required to ship from our plants. We will not be liable for delays in delivery caused by any reason beyond our control, including but not limited to acts of God, casualty, civil disturbance, labor disputes, transportation or supply difficulties, or any interruption of our facilities, and the quoted time for delivery shall be extended during the continuance of such conditions and for a reasonable time thereafter. In no event will Acopian be liable for any premium transportation, reprocurement, or similar costs incurred by the Customer as a result of conditions beyond Acopian's control resulting in Acopian's inability to deliver product in accordance with customer's requested delivery schedules.

QUANTITY DISCOUNTS: Discounts are available to quantity buyers and are dependent upon the order quantity and the manufacturing scheduling anticipated by the order, and apply only to the quantity and delivery ordered. Partial shipments are considered as separate orders for discounting purposes.

EXPORT ORDERS: A minimum export documentation charge of \$60.00 applies. (A minimum charge of \$25.00 applies on orders requiring customs forms for Canadian orders and for orders to certain U.S. territories.)

MOISTURE/FUNGUS PROOFING: Power supplies can be furnished with a moisture and fungus resistant varnish applied to interior surfaces. To order, add the suffix letter F to the model number. The additional cost is \$25.00 per output and requires two additional days. Not available on High Voltage, Mini Encapsulated, Rack Mounting, and Gold Box Switching models.

TAGGING: Maximum of 15 characters/spaces. Add \$10.00 to price.

TEST DATA: Cost, \$35.00 or 2% of order, whichever is greater.

SPECIAL MODELS/MODIFICATIONS: Cataloged models can be altered at the factory to meet special requirements. Contact the Applications Engineering Department to discuss your needs.

PARTS: The designs used in Acopian power supplies utilize standard components to the greatest practical extent. When replacements are required, the types originally used, or their equivalents, can usually be obtained most quickly from a local electronic components distributor.

Special components, such as transformers, are stocked at the factory warehouses. Contact the Applications Engineering Department for information on the parts required, referencing the model number of the power supply, the circuit designation of the component, and a description.

PURCHASE ORDER ACCEPTANCE: Orders are accepted subject to Acopian's Terms and Conditions. Any Terms and Conditions of any Purchaser's order, agreement, or understanding which are in addition to or inconsistent with Acopian's shall not be binding upon Acopian unless made in writing and accepted over the signature of an authorized officer of Acopian. Orders shall not be considered accepted until entered into production at our plant. Acopian reserves the right to refuse any order. All typographical and clerical errors are subject to correction by Acopian.

RETURNED GOODS: Acopian products are built on a per-order basis, and ordinarily no credit can be extended for their return. No goods will be accepted for return unless authorized in writing by Acopian.

CHANGES: The customer may, by a written notice, request changes within the general scope of the order, in the drawings, designs or specifications; method of shipment; and place of delivery. If any such change causes an increase or decrease in the cost, or the time required for the processing of any part of the order, an equitable adjustment shall be made in the price or delivery schedule, or both, and the order shall be modified in writing accordingly.

CANCELLATION: Suspension or cancellation of orders may be made only upon our written approval and on terms that will indemnify us against all loss.

OVERTIME: It is anticipated that any order will be processed during regular working hours on regular working days. If for any reason the Purchaser requests Acopian to process the order, or any portion of it, outside of such regular working hours, any overtime or other additional expense occasioned thereby shall be billed to and paid by the Purchaser as an extra cost. Acopian reserves the right to decline to process the order outside regular working hours.

CUSTOMER DELAY OF WORK: If the performance of all or any part of the work is delayed or interrupted by Customer's failure to act within the time specified (or within a reasonable time if no time is specified) and such act is not expressed or implied by the order, an adjustment shall be made in the cost of performance of the order caused by such delay or interruption and the order modified in writing accordingly. Adjustment will also be made in the delivery or performance dates and any other contractual provisions affected by such delay or interruption.

GOVERNMENT SPECIFICATIONS: Pricing is based upon industrial-grade construction, marking, packing, and packaging. Exception is taken to any MIL specifications, and to any requirements for the use of special forms, documentation other than quoted, and Government Source Inspection. Acopian must decline to quote on any other basis.

APPLICATIONS ASSISTANCE: Questions regarding the specifications, features, and use of any Acopian product should be directed to the Applications Engineering Department. A staff of power supply specialists will be pleased to assist you.

www.acopian.com - Online Ordering and Instant Quotes Online!



Since 1957

Acopian Technical Company

P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842

Call toll free: (800) 523-9478 (International: Country Code 01)

ALL ACOPIAN
POWER SUPPLIES
NADE IN U.S.A.



PHOTO COURTESY OF THE ICECUBE PROJECT

"At Project IceCube, it's absolutely critical to have a good power supply.

The ice must be as pure and clear as possible. If the power to the ice top sensor system were to fail, we would risk the tank water freezing without being controlled, resulting in bubbles and impurities, and very much reducing the quality of ice and quality of information that we can see with our detectors. We chose Acopian power supplies to power our pumping and degassing systems because of their reputation for reliability. The people at Acopian met all of our highly demanding specifications and, despite very little time until our window to ship to the Pole, they met our schedule.

We were 100% satisfied."

Jim Baccus Cable System Manager Project IceCube

(the international high-energy neutrino observatory being built and installed in the ice below South Pole Station)

The world's most demanding environments demand Acopian power systems.

Design your own Acopian power system online with the System Builder at www.acopian.com. Simply enter your requirements, and you'll receive a quotation for fully wired multiple-output power systems, without the need for you to prepare mechanical layouts or search through a power supply catalog.

Each system will be completely wired, tested and shipped within 9 days after receipt of the order. Choose Acopian – the power supplies of choice for the world's leading engineers.



ALL ACOPIAN POWER SUPPLIES MADE IN U.S.A.

