

# sPPC-2200



## Features

- 21.5" Full HD display w/ IB889 3.5" Disk Size SBC
- Removable 2.5" SATA HDD tray
- Slim design (40mm thick)
- Optional I/O protection cover
- Touch window & CCD for interactive function (for OEM/ODM)

## Specifications

System Mainboard	IB889-22
CPU Type	AMD Turion™ II Neo N54H processor on board (2.2GHz)
System Speed	2.2GHz
Memory	2x DDR3 1066MHz SO-DIMM, Max. 4GB
Graphicprocessor	AMD 785E built-in Radeon HD4200 Graphics
Construction	Steel (SGCC)
Chassis	Black
Extension I/O	1x DVI-I, 2x Gigabit LAN, 4x USB
HDD Expansion	Removable 2.5" SATA HDD tray
Power Supply	60W adaptor
Speaker	2x 10W 8ohm speakers
Mounting	VESA mount, 100mm x100mm
Dimensions	540mm(W) x 40mm(D) x 296mm(H)

## Environmental


Operating Temperature	0°C~ 40°C
Storage Temperature	-10°C~60°C
Relative Humidity	90%

## Ordering Information

sPPC-2200	21.5" Panel PC with 2.2GHz AMD Turion™ II Neo N54L CPU, 2GB DDR3 SO-DIMM, 60W power adaptor
sPPC-2200/IOC	sPPC-2200 IO protection cover

## Display

LCD Size	21.5" TFT LCD
LCD Color	16.7M colors
Backlight	LED
DisplayResolution	1920x1080 16:9 Full HD
LCD Brightness	250 cd/cm2
DotPitch	248.25 um x 248.25 um
ViewingAngle	170/160
Backlight MTBF	30,000 hrs

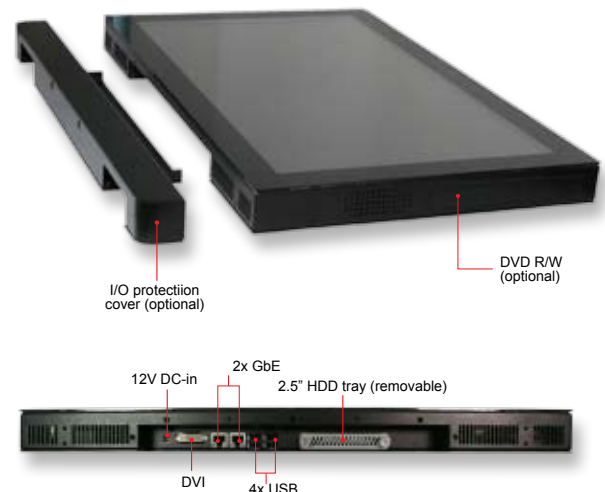

Remarks: 1. ODM/OEM is available  
 2. Specifications are subject to change without prior notice.