


# AR-B9622

5.7" x5.6"EPC

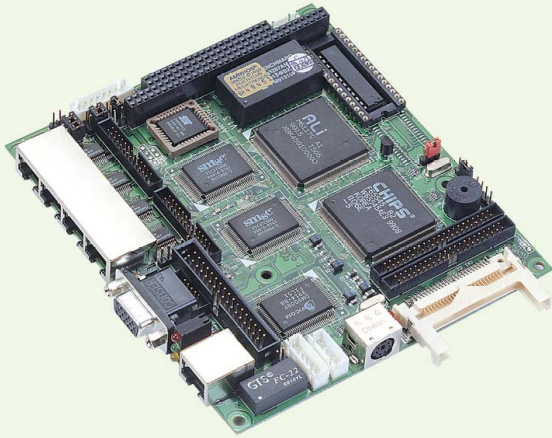

## Features

**386SX EPC with VGA(LCD),LAN, DOC,CF,4 COMs**

Fanless >

386 SX >

EDO >

4 COM >

DOC >

CF >

LCD >

PC104 Solt >

## Specification

### System:

CPU	33/40 MHz
Chipset	ALI M6117C AIF
System Memory	On-board 4MB & 4MB for Extension
BIOS	AMI
SSD	Supports one socket for ATA Compact Flash(CF) and one socket for DiskOnChip(DOC)
Watchdog Timer	Programmable watchdog timer
Expansion Interface	One 16-bit PC/104 (104-pin)
Power Consumption	+5V, 3.0A Maximum
Dimension	145mm x 142mm (5.7 " x 5.6 ")
Operating Temperature	0~60°C(32~140°F)
Storage Temperature	-20~80°C(-4~176°F)
Operating Humidity	0% ~ 90% Relative humidity non-condensing

### I/O:

Main IO	1xIDE, 1xFDD, 1xPC/AT (KB),1xPS/2 (mouse), 4xRS232C, 2xLPT
Ethernet	NE2000 compatible shielded RJ-45 edge connector

### Display:

Chipset	TOPRO TOP6508IQ
Memory Size	1MB VRAM
Resolution	CRT: 1280x1024, TFT LCD: 800x600
Interface	CRT & LCD connectors

### Packing list

190030006	3.5" FDD Cable
190030008	2.5" HDD Cable
190030010	Power Cable
190030144	COM Cable
190030145	Mouse Cable
190030146	Keyboard Cable
190030157	LPT Cable
190030158	VGA Cable
	Manual, Utility CD

## Ordering Information

### Standard:

AR-B9622	386SX EPC with VGA(LCD), LAN, DOC, CF, 4 COMs
----------	---

### Option

110010131-07	EDO RAM 2 MB
--------------	--------------

Specifications are subject to change without notice.