

3U Floppy Type N+1 Redundant Power Supply

ATX12V

EFRP-3303S

600+300 watts Output Power
N+1 Redundant Configuration
Meet Large Rack Mount System



Dimensions: 100(W) x 126(H) x 258(D) mm

Features:

- ⦿ Universal Power Input
- ⦿ Compact size Module Design
- ⦿ Active Power Factor Correction
- ⦿ Current Sharing on +5V, +3.3V & +12V
- ⦿ Front panel LED to Indicate Power Status
- ⦿ Remote DC Sense on +5V and +3.3V
- ⦿ Power Fault Alarm Signals
- ⦿ Over Voltage Protection
- ⦿ Over Current Protection
- ⦿ Over Power Protection
- ⦿ Short Circuit Protection
- ⦿ MTBF >100,000 Hours

General Specifications:

- ⦿ Input Range: 100 to 240 VAC, +/-10%
- ⦿ Power Factor: 0.95 minimum
- ⦿ Efficiency: 65% minimum, at full load
- ⦿ Hold up Time: 20mS minimum, at full load
- ⦿ PSON (Remote ON/OFF): TTL compatible signal
- ⦿ Power Good: 100 to 500 ms, TTL compatible signal
- ⦿ Cooling Fan: 40x40x20 mm
- ⦿ Operating Temperature: 0 to 50 centigrade degree
- ⦿ Operating Humidity: 20 to 90 %

Agency Requirements:

- ⦿ Harmonic: Meet EN61000-3-2 standards
- ⦿ EMI/RFI: CE, FCC class B and CISPR class B
- ⦿ Safety: UL, cUL, CB, TUV

Electrical Specifications:

Regulation, Ripple & Noise:

Output	+5V	+3.3V	+12V	-5V	-12V	5Vsb
Load Regulation	± 5%	± 5%	± 5%	± 10%	± 10%	± 5%
Cross Regulation	± 5%	± 5%	± 5%	± 10%	± 10%	± 5%
Line Regulation	± 1%	± 1%	± 1%	± 1%	± 1%	± 1%
Ripple & Noise	60mV	60mV	120mV	100mV	120mV	60mV

Input and Output Ratings:

Voltage	Input			Load	Output					
	Frequency	Current	Watt		+5V	+3.3V	+12V	-5V	-12V	5Vsb
90 – 264 VAC	47-63 Hz	10A max	600W	Max Load	50A	40A	25A	0.5 A	1.0A	2A
				Min Load	3A	0A	1A	0A	0A	0A

Note: 1. The +5 & +3.3 Volt combine total output shall not exceed 300W.


2. The +5, +3.3 and +12 Volt combine total output shall not exceed 580W.

3: Noise bandwidth is from DC to 20 MHz.

3U Floppy Type N+1 Redundant Power Supply

EFRP-3303S

Dimensions (Unit: mm):

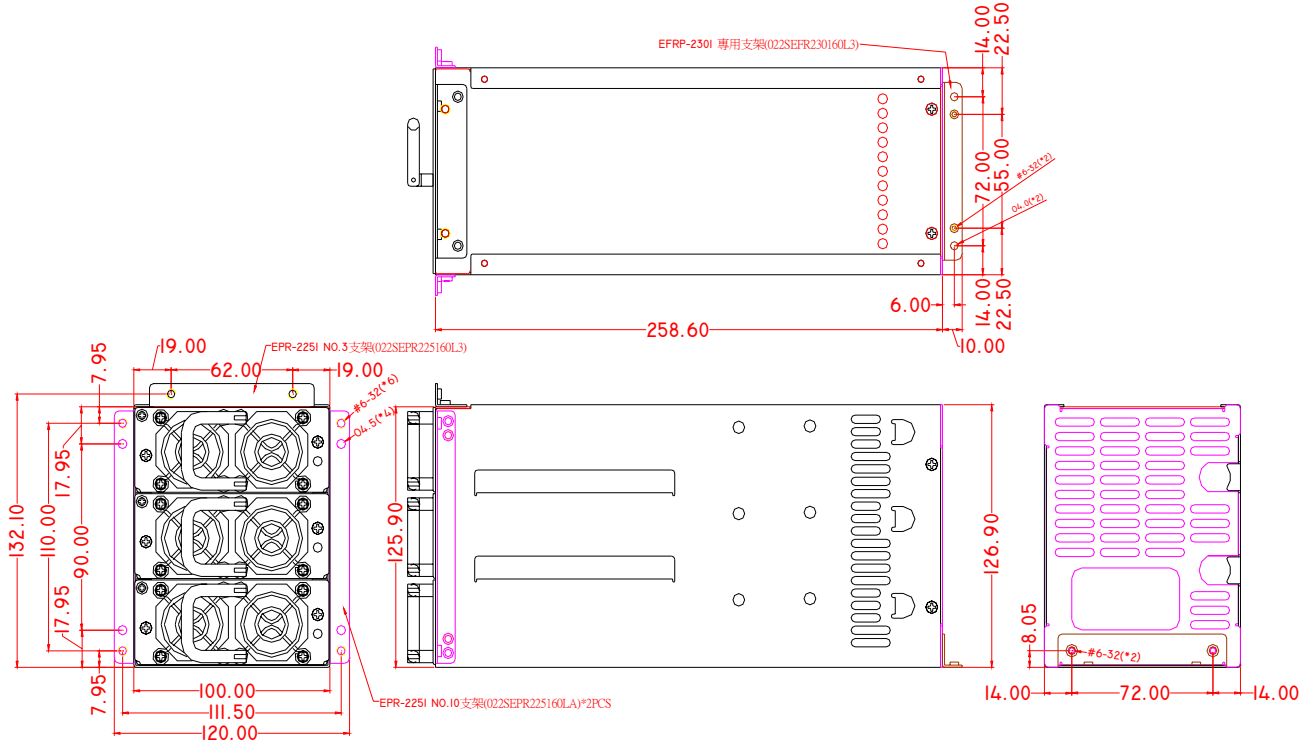

Rev: 1.2 May. 30, 03