


25 WATT AC-DC CONVERTER SVA-SA SERIES

Specifications<AC /DC >	M odel				
SVA **SA 25W ATTS/SINGLE	SVA 05SA	SVA 12SA	SVA 15SA	SV A 24SA	SV A 48SA
Input Characteristic					
Input Voltage	AC 100V				
Input Range	AC 85-132V				
Input Frequency	50/60Hz				
Input Frequency Range	47-440Hz				
Phase	Single				
Inrush Current *1	20A (maximum) at AC 100V				
Efficiency [%] (typical) *2	82	84	85	86	85

OCP Curve

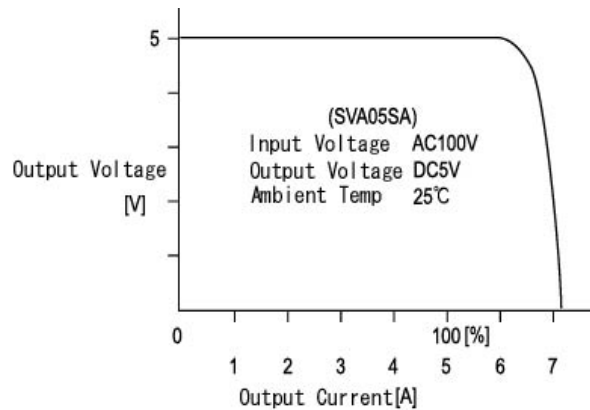

SVA**SA Specification

Specifications<AC/DC>	Model				
SVA**SA 25WATTS/SINGLE	SVA05SA	SVA12SA	SVA15SA	SVA24SA	SVA48SA
Output Characteristic					
Output Voltage [V]	5	12	15	24	48
Output Current [A]	5.0	2.1	1.7	1.1	0.50
Voltage Adjust Range	+/- 10% of Rated Output Voltage(at no load within the input range)				
Ripple and Noise [mVp-p](maximum) *3	150	220	250	340	580
Regulation					
Statistic Line Regulation [mV](maximum)	40	96	120	192	384
Statistic Load Regulation [mV](maximum)	45	108	135	216	432
Temperature Coefficient *4	0.03%/°C				
Drift[mV](maximum) *5	40	75	90	135	255
Dynamic Load Regulation [mV](typical) *6	150	360	450	720	1440
Recovery Time *6	0.3mS(typical)				
Rise up time	500mS(maximum) at 25°Cand rated input/output				
Hold up time	20mS(minimum) at 25°Cand rated input/output				
Functions					
Overcurrent Protection $\geq 10\%$ of Rated Output Current[A]	Current Limiting with automatic recovery				
	5.50	2.31	1.87	1.21	0.55
Overvoltage Protection $\geq 10\%$ of Rated Output Voltage[V]	output shutdown(to reset,leave 1minute after shut-off)				
	5.50	13.2	16.5	26.4	52.8
Remote Sense	not available				
Remote On/Off	not available				
Environmental					
Operating Temperature	0 to +50°C				
Operating Humidity	85%RH(non-condensing)				
Storage Temperature	-20 to +85°C				
Storage Humidity	85%RH(non-condensing)				
Withstanding Voltage	Primary-Secondary AC1,500V for 1minute				
	Primary-Frame Ground AC1,500V for 1minute				
	Secondary-Frame Ground AC500V for 1minute				
Isolation Resistance	Primary-Secondary-Frame Ground 50MΩ(minimum) by DC500V insulation tester				
Vibration	5-10Hz:10mm double amplitude,10-55Hz:19.6m/s ² ,20minutes' period for 60minutes each along X,Y,Z axes(non-operating)				
Shock	294m/s ²				
Cooling	Convection				
? Leakage Current	1mA(maximum) at 25°Crated input/output and rated input frequency				
? Safety					
Weight (typical)	220g				
? MTBF [H]	640,000				
? Switching Frequency[kHz](typical)	130				90

Conditions:

- *1 at cold start
- *2 at DC130V input and rated output
- *3 measured by a bayonet probe at output connector at 0 to 100MHz bandwidth
- *4 at 0 to +50°C
- *5 for 7hour period after 1hour warm-up at 25°Cand rated input/output
- *6 when output current changed from 25% to 75% of rated output current rapidly at AC100V input




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

ETA-USA Tel: 408-778-2793 Fax: 408-779-2753 e-mail: sales@eta-usa.com

Efficiency Curve

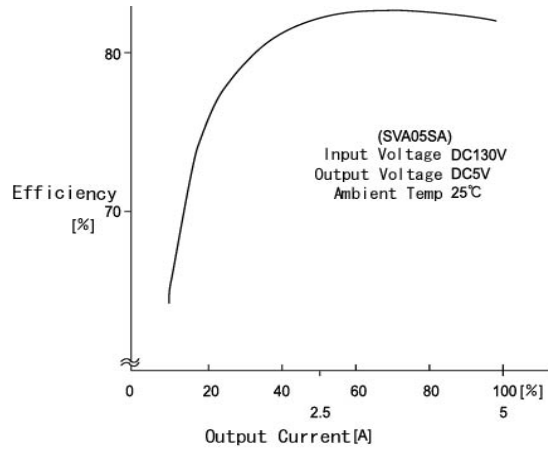

Dimension (mm)

