


Connector for FLEXWELL® elliptical waveguide E60, CPR137G Flange

Product Description

Tunable connector for FLEXWELL® elliptical waveguide E60 with CPR137G flange, gasket sealed
frequency range: 5.925 - 6.425 GHz

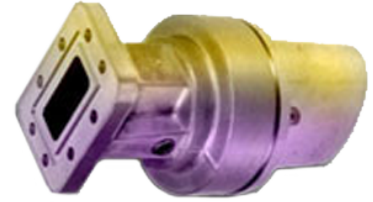

C61-137ET Tunable

Features/Benefits

Superior Design

- Fewer tuning screws / better performance

Quick & Easy Installation

- Flaring tools not required
- Assemble using standard hand tools performance

Assorted Connector Types

- Standard (non-tunable), tunable and pre-tuned versions are available
- Two basic interface series - flange can mate with either a choke or a cover flange

Technical Specifications

Transmission Line Type	Elliptical Waveguide
Cable Type	E60
Model Series	E60 Series
Connector Interface	CPR137G
Connector Type	Tunable
Sealing Method	Gasket
Connector Frequency Range, GHz	5.925 - 6.425
Length, mm (in)	132 (5.2)
Outer Diameter, mm (in)	74 (2.9)
Weight, kg (lb)	1.54 (3.40)

Notes

Other Documentation