


PCM-3115C

PC/104 2-slot PCMCIA Module



Features

- *PCMCIA Socket Supports Two Type III Cards or One Type III Card*
- *Supports Bootable Function From Linear Flash Card, ATA Card and SRAM Card*

Ordering Information


- **TF-PCM-3115C**
PC/104 Board 2-slot PCMCIA Module

Specifications

| | |
|-------------------|---|
| Standard | Complies with PCMCIA v.2.1 and JEIDA v4.2 |
| Memory | Programmable 8KB boot FLASH ROM |
| Interface | 16-bit data bus |
| Indicator | Busy status LED |
| Power Requirement | +5V |

PCM-3116

PC/104 PCMCIA/CompactFlash™ to IDE Module

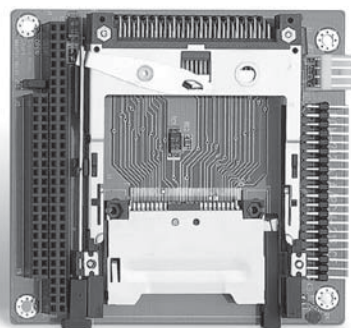

Specifications

| | |
|-----------------------|---------------------------------------|
| Connector | 40-pin IDE and 4-pin power connectors |
| Power Requirement | +5V |
| Operating Temperature | 32°F ~ 158°F (0°C ~ 70°C) |

Mass Storage Modules

Features

- *Allows System to Access the PCMCIA or CompactFlash™ ATA Card Directly as a Standard IDE Drive*
- *Supports Type I/II/III PCMCIA and Type III CompactFlash™ Cards*
- *No Driver Required*

Ordering Information

- **TF-PCM-3116**
PC/104 PCMCIA/ CompactFlash™ to IDE Module
- **TF-PCM-3116CF**
PC/104 CompactFlash™ to IDE Module
- **TF-PCM-3116PC**
PC/104 PCMCIA to IDE Module
- **TF-PCM-3116PC/F**
PCMCIA to IDE Drive with 3.5" Floppy Disk Drive Form Factor