


# AR-B1656

7.35"×5.74"

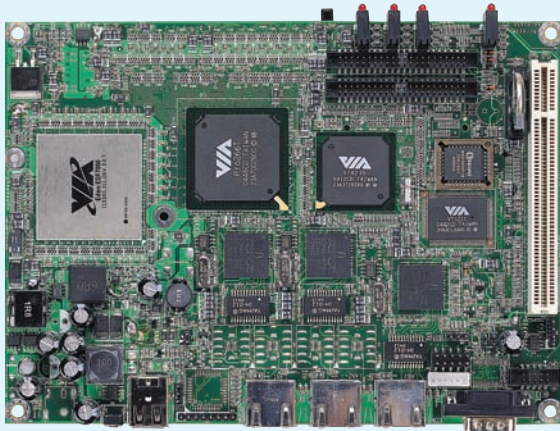

Back Side: Mini-PCI

## Features

**Fanless Onboard VIA Eden 733MHz CPU with DDR DRAM socket, 3 10/100 LAN, 2 USB, 2 Serial Ports, 1 Mini PCI, 1 PCI Slot, Compact Flash, Auto MDIX, PXE, Console Redirection**

- Fanless
- 2 USB
- Auto-MDIX
- VIA Eden
- Mini PCI
- PXE
- CF
- 3 LANs
- DDR RAM
- By-Passed LAN (Option)
- Console Redirection

Xfire.acrosser.com.tw

## Specification

### System:

CPU	On-board VIA Eden 733 MHz CPU
Chipset	Pro266T, 8235 CD
System Memory	One SODIMM, supports up to 1.0GB memory
BIOS	AWARD
SSD	1 (Compact Flash Type II)
Expansion Interface	1 (32-bit PCI Expansion Slot), 1 Mini-PCI
Battery	Lithium 3V/220mAH
Power Requirement	+12V Input; 50W AC power Adapter, Input range 115V AC 60GHz ~ 230V AC 50Hz
Watchdog Timer	Software programmable 60 seconds
Dimension	187mm×137mm (7.35"×5.43")
Operating Temperature	0~60°C(32~140°F)
Storage Temperature	-20~80°C(-4~176°F)
Operating Humidity	0% ~ 90% Relative humidity non-condensing

### I/O:

Ethernet	On-board 10/100Mbps(default), 1000mbps(option), Broadcom x 3/BCM-4410, RJ-45 x 3
USB	2 (USB 1.1 compliant)
Serial Port	1 x RS232 external connector, 1 x RS232/422/485 with pin-header
Interface	1 (3.3V Mini PCI connector, Internal)
PS/2	Mouse x 1, Keyboard x 1
GPIO	8 Independent I/O Lines, TTL level
IDE	On-board 2.00mm 44 pin-header; 2 connectors Supports Ultra DMA 33

### Management:

Indicator	1x Power LED, 1x Hard drive LED, 8 LEDs for Network connect as ACT and Link
-----------	---

### Packing list:

Part No.	Utility CD, Manual
----------	--------------------

## Ordering Information

### Standard:

AR-B1656	Fanless Onboard VIA Eden 733MHz CPU with DDR DRAM socket, 3 10/100 LAN, 2 USB, 2 Serial Ports, 1 Mini PCI, 1 PCI Slot, Compact Flash, Auto MDIX, PXE, Console Redirection
----------	---

### Option:

190030213	HDD Cable
190030158-01	VGA Cable
190030195	Keyboard/Mouse Cable

Specifications are subject to change without notice.