

## TENTATIVE

### Features

- High Efficiency up to 83%
- Operating Temp. Range  
- 40°C to +71°C
- Indefinite Short-Circuit Protection
- I/O-Isolation 1500 VDC
- Industry Standard Pinout
- Cost optimized Design
- 3 Year Product Warranty



The TEL 15 series is a range of DC/DC-converter modules with wide input range of 2:1. State of the art SMD-technology guarantees a product with very high reliability and good cost /performance ratio. High efficiency allows an operating temperature range of -40°C to +71°C without derating. This product serie provides an economical solution for many cost critical applications in industrial and consumer electronics.

### Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEL 15-1210	9 – 18 VDC	3.3 VDC	4'000 mA	tba
TEL 15-1211		5 VDC	3'000 mA	tba
TEL 15-1212		12 VDC	1'250 mA	tba
TEL 15-1213		15 VDC	1'000 mA	tba
TEL 15-1222		± 12 VDC	± 625 mA	tba
TEL 15-1223		± 15 VDC	± 500 mA	tba
TEL 15-2410	18 – 36 VDC	3.3 VDC	4'000 mA	tba
TEL 15-2411		5 VDC	3'000 mA	tba
TEL 15-2412		12 VDC	1'250 mA	tba
TEL 15-2413		15 VDC	1'000 mA	tba
TEL 15-2422		± 12 VDC	± 625 mA	tba
TEL 15-2423		± 15 VDC	± 500 mA	tba
TEL 15-4810	36 – 75 VDC	3.3 VDC	4'000 mA	tba
TEL 15-4811		5 VDC	3'000 mA	tba
TEL 15-4812		12 VDC	1'250 mA	tba
TEL 15-4813		15 VDC	1'000 mA	tba
TEL 15-4822		± 12 VDC	± 625 mA	tba
TEL 15-4823		± 15 VDC	± 500 mA	tba

### Input Specifications

Input current no load /full load	12 Vin models: 24 Vin models: 48 Vin models:	40 mA typ. 25 mA typ. 20 mA typ.
Input current (full load)	12 Vin; 3.3 Vout models: 12 Vin; other output models: 24 Vin; 3.3 Vout models: 24 Vin; other output models: 48 Vin; 3.3 Vout models: 48 Vin; other output models:	1580 mA typ. 1500 mA typ. 780 mA typ. 740 mA typ. 390 mA typ. 370 mA typ.
Surge voltage (100 msec. max.)	12 Vin models: 24 Vin models: 48 Vin models:	36 V max. 50 V max.. 100 V max.

### Output Specifications

Voltage set accuracy		± 1 %
Regulation	– Input variation Vin min. to Vin max. – Load variation 10 – 100 % – single output models – dual output models balanced load – dual output models unbalanced load	± 1 % max.  ± 0.5 % max. ± 1 % max. ± 3 % max.
Ripple and noise (20 MHz Bandwidth)	single output models: dual output models:	50 mVpk-pk max. 75 mVpk-pk max
Temperature coefficient		± 0.02 % / K
Output current limitation		> 110% of Iout max., constant current
Short circuit protection		indefinite (automatic recovery)
Capacitive load	3.3 Vout models: 5 Vout models / ± 5 Vout models: 12 Vout models / ± 12 Vout models: 15 Vout models / ± 15 Vout models:	tba tba tba tba

### General Specifications

Temperature ranges	– Operating – Case temperature – Storage	– 40 °C ... + 71 °C (without load derating) + 100 °C max. – 55 °C ... + 125 °C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217 E)		tba
Isolation voltage	– Input/Output	1'500 VDC
Switching frequency (fixed)	single output models: dual output models:	500 kHz typ. (Pulse width modulation PWM) 300 kHz typ. (Pulse width modulation PWM)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


**General Specifications**

Safety standards UL 1950, EN 60950, IEC 60950 (Compliance up to 60 VDC input voltage (SELV limit))

**Physical Specifications**

Case material	Copper nickel plated
Baseplate	Non conductive plastic
Potting material	Epoxy (UL 94V-0 rated)
Weight	31g (1.09oz)
Soldering temperature	max. 250 °C / 10 sec.

**Outline Dimensions mm (inches)**

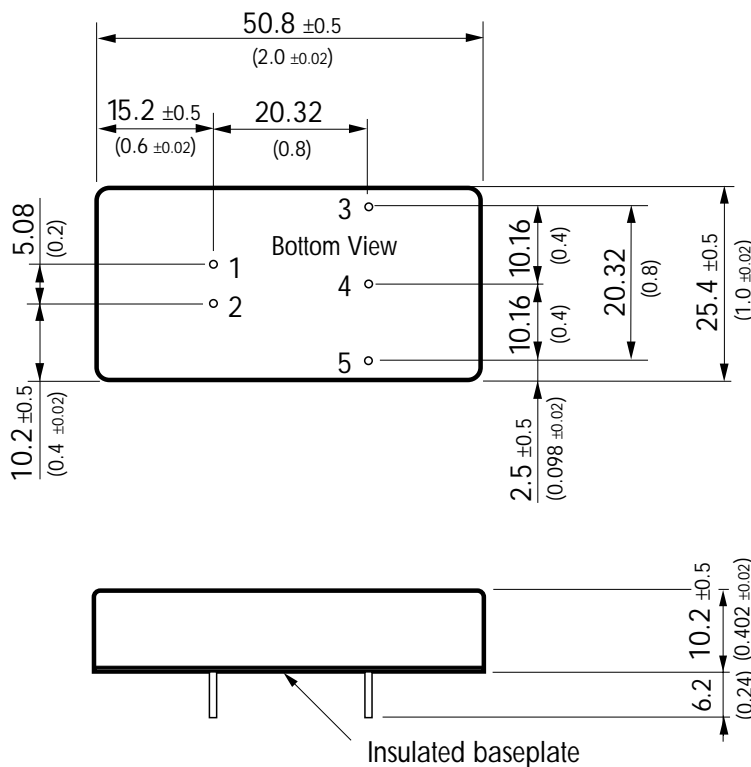

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	No pin	Common
5	-Vout	-Vout

Pin diameter  $\varnothing 1.0 \pm 0.05$  (0.039  $\pm 0.002$ )

Specifications can be changed without notice