



HCMOS 32.768kHz SMD CRYSTAL OSCILLATOR

MODEL: FOX465



FEATURES


- Tight Stability
- HCMOS Output
- Operable 1.5V ~ 6.0V



Learn more about:
Part Marking Identification
Internet required

• PART NUMBER SELECTION <small>Learn More - Internet Required</small>				
Part Number	Model Number	Frequency Stability	Operating Temperature (°C)	Frequency (kHz)
755-Frequency-xxxxx	FOX465	See below	-40 ~ +85	32.768

• ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	32.768 kHz
Temperature Range	
Operating (TOPR)	-40°C ~ +85°C
Storage (TSTG)	-40°C ~ +85°C
Frequency Tolerance @ 25°C	+30 ~ 0 PPM
Frequency Stability	
-10°C ~ +60°C	+30 ~ -60 PPM
-40°C ~ +85°C	+30 ~ -150 PPM
Supply Voltage (VDD) ¹	3.3V ± 10%
Input Current (IDD) (no load)	5 µA
Output Symmetry (50% VDD)	45% ~ 55%
Rise Time (10% ~ 90% VDD) (TR)	80nS
Fall Time (90% ~ 10% VDD) (TF)	80nS
Output Voltage (VOL)	10% VDD
(VOH)	90% VDD Min
Output Load (HCMOS)	15pF
Start-up Time (Ts)	500mS

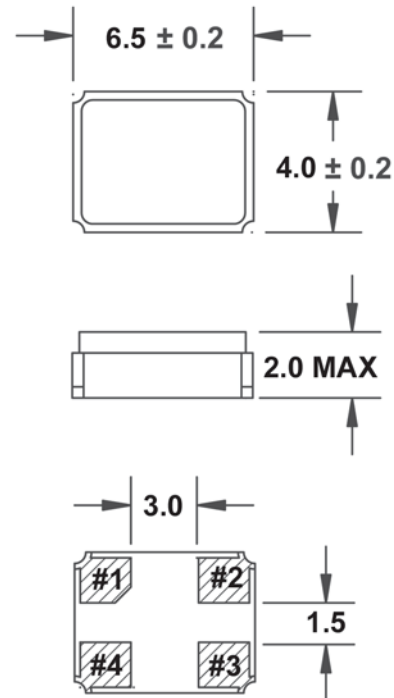

¹ Usable at 1.5 ~ 6.0V.

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Note: A 0.01µF bypass capacitor should be placed between VDD (Pin 4) and GND (Pin 2) to minimize power supply line noise.

The above specifications, having been carefully prepared and checked, is believed to be accurate at the time of publication; however, no responsibility is assumed by Fox Electronics for inaccuracies. All specifications subject to change without notice. Rev. 3/7/05

Pin Connections

- #1 E/D #3 Output
- #2 GND #4 V DD

TERMINATIONS: Ni/Au

All dimensions are in millimeters.

• ENABLE / DISABLE FUNCTION	
(Pin 1)	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level V _{IH} ≥ 90% V _{DD}	ACTIVE
'0' Level V _{IL} ≤ 10% V _{DD}	High Z