



GH 1234 is a general purpose battery with 5 years life in standby service, or more than 260 cycles at 100% D.O.D by cyclic use. As with all Prism batteries, all GH models are rechargeable, highly efficient, leak proof and maintenance free.

## Specification


Cells Per Unit	6
Voltage Per Unit	12
Capacity	3.4Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 1.3 Kg
Max. Discharge Current	34 A (5 sec)
Internal Resistance	Approx. 45 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	0.96 A
Equalization and Cycle Service	14.4 to 15.0 VDC/unit Average at 25°C
Self Discharge	Prism batteries can be stored for more than 6 months at 25°C. Please charge batteries before using. For higher temperature, the time interval will be shorter.
Terminal	Faston Tab 187(F1)
Container Material	A. B.S. (UL94-HB) Flammability resistance of UL94-V2 can be available upon request.



MH14533(N)



ISO 14001  
NO.UM 1-12-0045




ISO9001  
No :041005117

CSB batteries are UL-recognized components under UL924 and UL1989. CSB is also certified by ISO 9001 and ISO 14001.

## Dimensions

Unit: mm (inch)

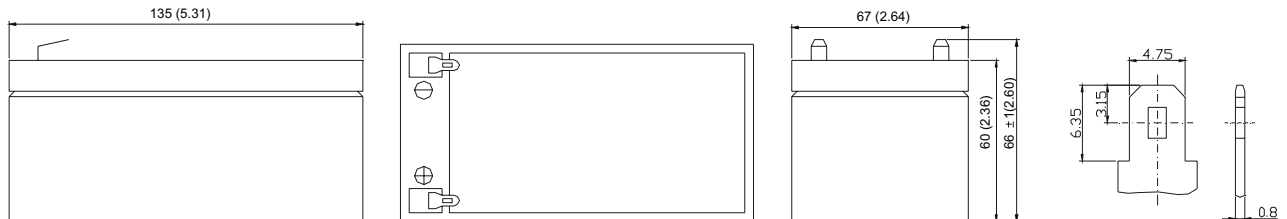

### Constant Current Discharge Characteristics Unit: A(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	13.3	8.88	6.83	3.75	2.22	1.33	0.82	0.67	0.54	0.40	0.31	0.18
1.67V	12.4	8.28	6.42	3.70	2.21	1.32	0.82	0.67	0.54	0.40	0.31	0.18
1.70V	11.8	8.03	6.27	3.67	2.19	1.32	0.81	0.67	0.53	0.40	0.31	0.18
1.75V	10.6	7.51	5.94	3.58	2.16	1.30	0.81	0.66	0.53	0.40	0.30	0.17
1.80V	9.49	7.00	5.61	3.50	2.13	1.28	0.80	0.66	0.53	0.39	0.30	0.16
1.85V	8.36	6.49	5.29	3.41	2.10	1.26	0.80	0.66	0.52	0.39	0.29	0.15

### Constant Power Discharge Characteristics Unit: W(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	25.6	16.6	13.5	7.51	4.44	2.66	1.64	1.34	1.27	0.80	0.62	0.35
1.67V	24.0	16.0	12.8	7.39	4.43	2.64	1.63	1.33	1.26	0.80	0.62	0.34
1.70V	23.5	15.5	12.5	7.34	4.42	2.64	1.63	1.33	1.26	0.79	0.61	0.33
1.75V	21.3	14.9	11.9	7.16	4.34	2.60	1.62	1.32	1.25	0.79	0.60	0.32
1.80V	19.0	13.9	11.2	6.99	4.27	2.56	1.61	1.32	1.25	0.78	0.60	0.31
1.85V	16.7	13.0	10.6	6.82	4.20	2.52	1.59	1.31	1.25	0.78	0.59	0.30

All mentioned values are average values.


### Temperature effects curve

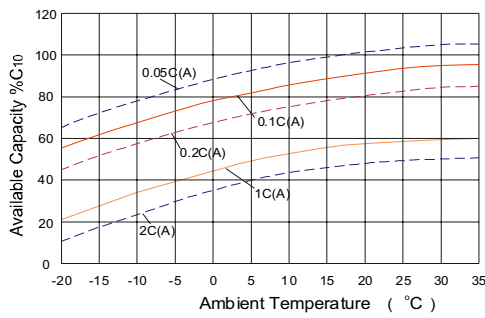


### Storage characteristic

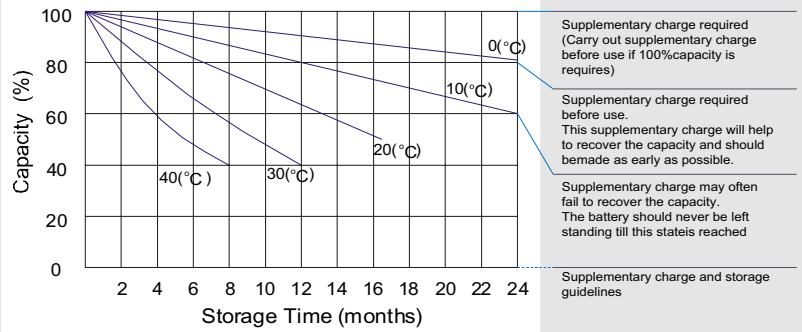


### Life characteristics of cyclic use

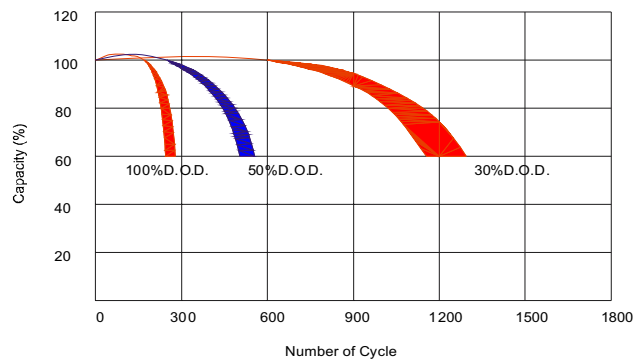


### Effect of temperature on long term float life

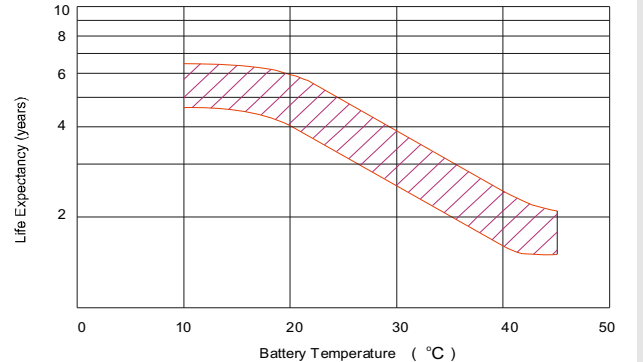

### Charge characteristic Curve for standby use

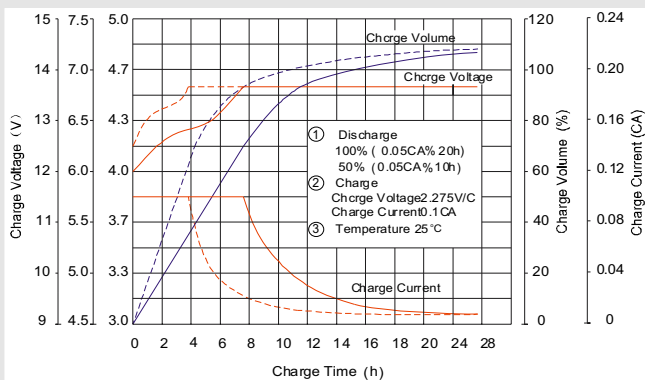

### Discharge characteristic Curve

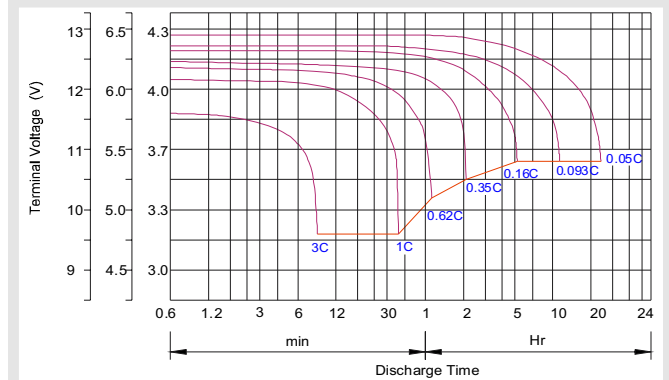

### Charging Procedures

Application	Charge Voltage (V)			Max. Charge Current
	Temperature	Set point	Allowable range	
Cycle Use	25°C	14.7	14.4~15.0	0.3C
Standby	25°C	13.7	13.6~13.8	0.3C

### Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Charge the batteries at least once every six months, if they are stored at 25°C.

### Charging Method:

Constant Voltage	7.25~7.45V, 5~11h, Max. Current 0.1CA
Constant Current	0.1CA x 5h
Fast	0.3CA x 1.7h

### Charging Procedures(6V series)

Application	Charge Voltage (V)			Max. Charge Current
	Temperature	Set point	Allowable range	
Cycle Use	25°C	7.35	7.25~7.45	0.3C
Standby	25°C	6.85	6.8~6.9	0.3C

**Sales Office** URL: [WWW.CSB-BATTERY.COM](http://WWW.CSB-BATTERY.COM)

**CSB BATTERY CO., LTD.**  
 TAIWAN OFFICE  
 Tel: +886-2-2555-5600  
 Fax: +886-2-2555-3300  
 E-mail: service@csb-battery.com.tw

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
 SHANGHAI OFFICE  
 Tel: +86-21-5046-1622, 5046-0833  
 Fax: +86-21-5064-3314  
 E-mail: chinasis@csb-battery.com

**CSB BATTERY TECHNOLOGIES, INC**  
 USA OFFICE  
 Tel: +1-817-244-7777/1-8003 CSBUSA(272872)  
 Fax: +1-817-244-4445  
 E-mail: csb@csb-battery.com

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
 BEIJING OFFICE  
 Tel: +86-10-6597-8060, 6597-8070  
 Fax: +86-10-6597-8050  
 E-mail: chinasis@csb-battery.com

**CSB BATTERY OF NETHERLANDS B.V**  
 NETHERLANDS OFFICE  
 Tel: +31(0) 180 418 140  
 Fax: +31(0) 180 418 327  
 E-mail: eurosales@csb-battery.com

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
 SHENZHEN OFFICE  
 Tel: +86-755-8831-6488/6396/16356  
 Fax: +86-755-8831-6548  
 E-mail: she@csb-battery.com.cn