

SDX-6300-48

SDX-6400-48

**300/400W, Six Output
 Industrial 2U System**



200 x 100 x 67 mm
 7.87 x 3.94 x 2.64 inch



Features:

- * Input and output isolation
- * Soft start function, low inrush current
- * Over voltage protection
- * Over load & short circuit protection
- * 100% full load burn-in test
- * Meet Intel ATX 2.01 / ATX 2.03 / ATX 12V / EPS
- * Meet LVD standard
- * UL, cUL, TUV, CB, CE approved

Specification:

INPUT	Model No.	SDX-6300-48						SDX-6400-48					
		Voltage	36V ~ 72V DC (Typical 48V)										
	Current	<12.6A @ 36V DC input.						<17A @ 36V DC input.					
	Protection	Ceramic fuse, 15A/250V						Ceramic fuse, 20A/250V					
OUTPUT	OUTPUT	V1	V2	V3	V4	V5	V6	V1	V2	V3	V4	V5	V6
	Voltage	5V	3.3V	12V	-5V	-12V	5Vsb	5V	3.3V	12V	-5V	-12V	5Vsb
	Min Load	0.5A	0.1A	0.2A	0A	0A	0A	2A	0A	1A	0A	0A	0A
	Max Load	30A	20A	16A	0.5A	1A	2A	40A	28A	18A	0.5A	1A	2A
	Output Tolerance ②	±5%	±5%	±5%	±5%	+8/-5%	±5%	±5%	±5%	±5%	±5%	+8/-5%	±5%
	Ripple Noise MAX. ③	70mV	70mV	120mV	100mV	200mV	70mV	70mV	70mV	120mV	100mV	200mV	70mV
	Efficiency (TYP.)	67%						66%					
Output MAX.	SDX-6300-48	3.3V & 5V total output max 150W, -5V & -12V total output max 12W, Total output max 300W.											
	SDX-6400-48	3.3V & 5V total output max 200W, -5V & -12V total output max 12W, Total output max : 36V~42V: 350W;43V~72V: 400W											
PROTECTION	Over Voltage	5.8V~ 7.0V	3.8V~ 4.6V	13.8~ 16.8V	---	---	---	5.8V~ 7.0V	3.8V~ 4.6V	13.8~ 16.8V	---	---	---
		Shutdown, it needs re-power on to recover											
	Over Load & Short Circuit	When power supply over 105%~ 150% max load or short circuit acted, power supply will be shutdown and recover automatically after the fault is removed.											
ELEC. CHAR.	Rise time	<20mS											
	Power good signal	Power ON within 100---500ms, high level TTL Signal release.											
ENVIRONMENT	Temperature ④	Operating: -10 ~ 70°C ; De-rating: 45 ~ 70°C : 2.5%/°C ; Storage: -20~+85°C											
	Humidity	Operating: 20% ~ 90% (non condensing) RH; Storage: 10% ~ 95% RH (non condensing)											
SAFETY	Withstand voltage	I/P-O/P:2.0KVAC, I/P-PE:1KVAC, 1minute											
	Isolation resistance	I/P-O/P, I/P-PE, > 100MΩ/500VDC at 25°C / 70% RH											
EMC	EMI	EN 55022 CLASS B · FCC CFR 47 PART 15 CLASS B · CNS 13438 CLASS B.											
	EMS	EN 55024 : EN 61000-4-2,3,4,6,8 ; ENV 50204											
OTHERS	Cooling	Forced airflow cooling with DC fan											
	M.T.B.F.	138K hours											
	Dimension	200 x 100 x 67 mm (L*W*H)											
	Packing	N.W.: 1.84 Kg / 1pc;12 pcs/ 2.02 CUFT / 1 CTN											



- NOTE
- ① All measurements which not mentioned are based on 48VDC input, **output Max** at ambient 25°C / 70%RH.
 - ② Output tolerance included set up voltage, line regulation and load regulation.
 The regulation is measured at the condition : when any of output is with 20% ~ 100% **max load** and the rest of each outputs are with 60% **max load**, Each output could work within **max load** but must under total **output max**.
 - ③ Ripple & noise are measured at 40~72VDC input with 0~50°C condition and 20MHz of bandwidth by terminated using a 10" ~ 15" twisted pair-wire with a 0.1uF & a 47uF parallel capacitor.
 - ④ The operating temperature shall follow the de-rating curve in spec
 - ⑤ The power supply is considered a component of end-equipment. The end-equipment must be re-confirmed whether comply with EMC directives.

SDX-6300-48

SDX-6400-48

De-rating Curve :

Output De-rating Vs Input Voltage

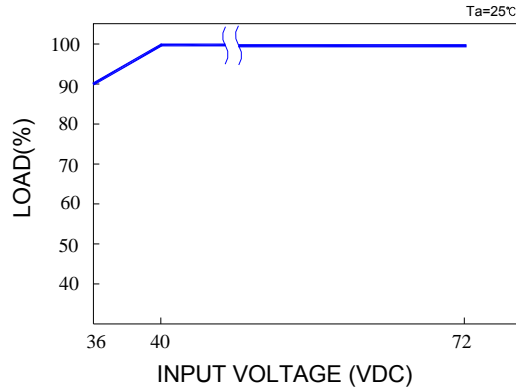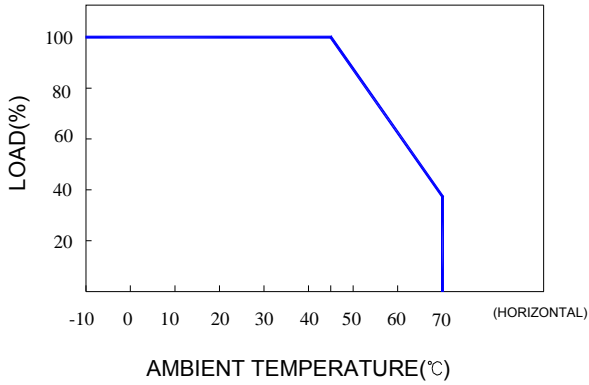

Dimension:

(Unit: mm)

