

## Features

- 6-Slot Wallmount Chassis
- 6-Slot ISA/ PICMG Bus Passive Backplanes
- Standard PS2 Power Supply Up To 400W
- 3.5" x 1 External Drive Bay
- 5.25" x 1 External Drive Bay
- 3.5" x 2 Internal Drive Bay
- USB2.0 x 2 On Front Panel




## Specifications

| System                |   |
|-----------------------|---|
| Construction          | Heavy-duty steel  |
| Storage               | External: 3.5" Drive Bay x 1  |
|                       | Internal: 5.25" Drive Bay x 1<br>3.5" Drive Bay x 2   |
| System Fan            | 8cm Ball Bearing Fan with Removable Filter x 1  |
| Front Panel           | Power ON/OFF Switch x 1<br>Reset Button x 1<br>Power LED x 1<br>HDD Active LED x 1<br>PS/2 Keyboard Connector x 1<br>USB Port x 2 |
| Rear Panel            | Reserved Cut-out for DB-25 Connector x 1<br>Reserved Cut-out for DB-9 Connector x 1   |
| Color                 | White   |
| Dimensions            | 6.9" (W) x 16.1" (D) x 10" (H) (175mm x 405mm x 254mm)  |
| Carton Size           | 12.4" (W) x 14.37" (D) x 20.47" (H) (315mm x 365mm x 520mm)   |
| Net Weight            | 12.1 lb (5.5 kg)  |
| Gross Weight          | 13.9 lb (6.3 kg)  |
| Environmental         |   |
| Operating Temperature | 32°F ~ 122°F (0°C ~ 50°C)   |
| Storage Temperature   | -4°F ~ 176°F (-20°C ~ 80°C)   |
| Operating Humidity    | 10 ~ 80%  |
| Storage Humidity      | 10 ~ 80% @ 40°C, non-condensing   |
| Vibration             | 0.5 g rms/ 5 ~ 500 Hz/ operation  |
|                       | 1.5 g rms/ 5 ~ 500 Hz/ non operation  |
| Shock                 | 15 G peak acceleration (11 m sec. duration), operation  |
|                       | 30 G peak acceleration (11 m sec. duration), non operation  |
| EMC                   | CE/FCC Class A  |

# AMC-262

## Dimension

Unit: mm

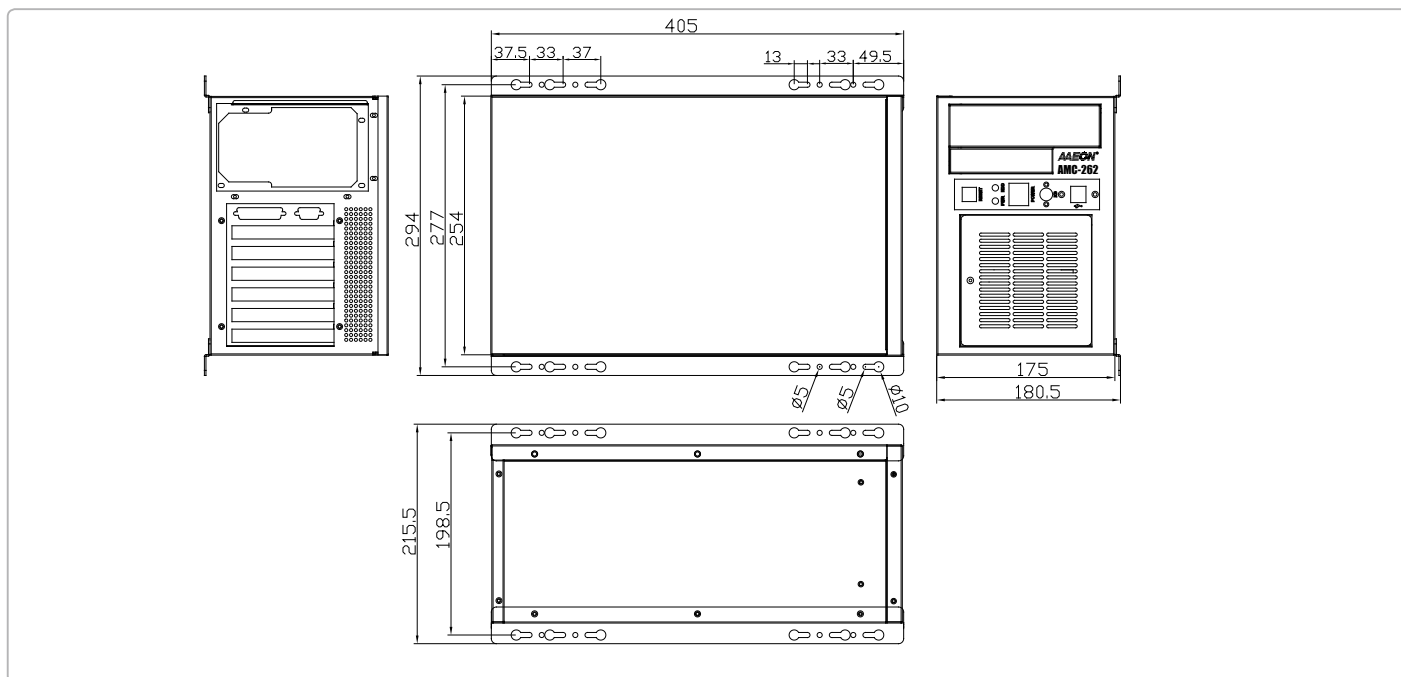

## Power Supply Options

| P/N        | TYPE | PFC Support | Input Voltage | Watt | Size | Remark |
|------------|------|-------------|---------------|------|------|--------|
| 1757940014 | ATX  | Active PFC  | Auto 100-240V | 400W | PS2  |        |

## Passive Backplane Options

| P/N            | Description  | Master Interface | Slots                       | Power Connector, ATX Extend Function |
|----------------|--|------------------|-----------------------------|--------------------------------------|
| TF-BP-206SP-P4 | Wallmount, PCI, 6-Slot Backplane, 4 PCI, Single Segment, ATX                 | PCI              | 4/0/2 (PCI/ ISA/ PICMG_PCI) | ATX, 3-pin ATX extend                |
| TF-BP-206SS-P4 | Wallmount, PCISA, 6-Slot Backplane, 4 PCI, 3 PCISA, Single Segment, ATX      | PCISA            | 4/1/0 (PCI/ ISA/ APCI)      | ATX                                  |
| TF-BP-206SG-P2 | Wallmount, PICMG, 6-Slot Backplane, 2 PCI, 3 ISA, Single Segment, ATX        | PICMG            | 2/3/1 (PCI/ ISA/ PICMG)     | ATX, 3-pin ATX extend                |
| TF-BP-206SG-P4 | Wallmount, PICMG, 6-Slot Backplane, 4 PCI, 2 ISA, Single Segment, ATX        | PICMG            | 4/2/2 (PCI/ ISA/ PICMG)     | AT, ATX, 3-pin ATX extend            |
| TF-BP-206SH-P3 | Wallmount, Backplane, PICMG 1.3, 6-Slot, 3 PCI, 2 PCI-E, Single segment, ATX | PICMG 1.3        | 3/2/1 (PCI/PCI-E/PICMG 1.3) | ATX                                  |
| TF-BP-206SI    | Wallmount, ISA 6-Slot Backplane, 6 ISA, Single segment, AT/ATX               | ISA              | (0/6/0)                     | AT/ATX                               |

## CPU Cards Options

| Model/Name  | Description  | Master Interface |
|-------------|--|------------------|
| TF-FSB-G41H | Socket LGA 775, Intel® Core™ 2 Duo/ Core™ 2 Quad (800/1066/1333)           | PICMG 1.3        |
| TF-FSB-960H | Socket LGA 775, Intel® Core™ 2 Duo/ Core™ 2 Quad (800/1066/1333)           | PICMG 1.3        |
| TF-FSB-860B | Socket 478, Intel® P4/ Celeron® (400/533 MHz)                              | PICMG            |
| TF-FSB-868G | Socket LGA 775, Intel® P4/ P-D/ Celeron® D/ Core™ 2 Duo (533/800/1066 MHz) | PICMG            |
| TF-HSB-965P | Socket 478, Intel® Core™ 2 Duo (533/667/800 MHz)                           | PCI              |
| TF-HSB-945P | Onboard Intel® Atom™ N270 1.6 GHz  | PCI              |
| TF-HSB-800P | Onboard AMD LX 800 Processor   | PCI              |
| TF-HSB-910I | Onboard Intel® Celeron® M (600 MHz)(400 MHz)                               | ISA              |
| TF-HSB-800I | Onboard AMD LX 800 Processor   | ISA              |
| TF-HSB-525I | Onboard Intel® Atom™ D525  | ISA              |

## Ordering Information

| Model/Name      | Description  | Remark |
|-----------------|--|--------|
| TF-AMC-262-W-00 | Wallmount, 6-Slot Bare Chassis, for PS2 Power, PS_SW (ATX), Color: White |        |