

VTC475352

2U Industrial 19" Rack mount Chassis

Applications

Internet Server (Web / Mail)


Firewall / VPN

File Server

Telephony / Telecom / VoIP

Network / Telecom Computers

Military Application

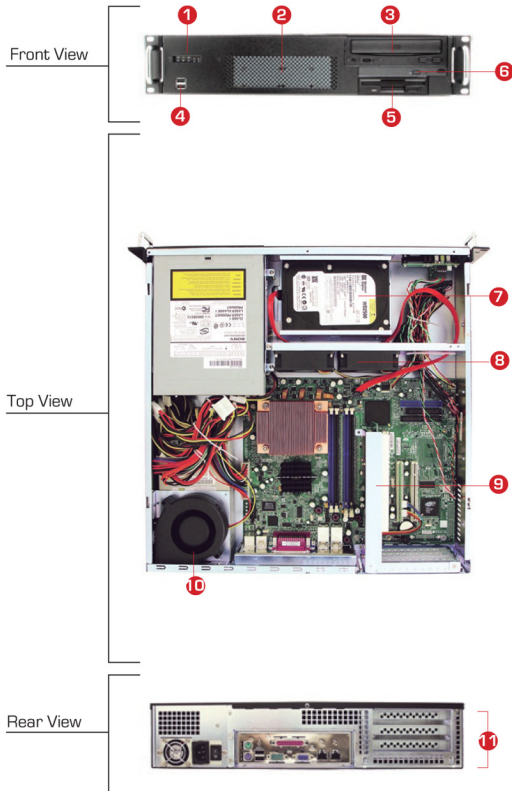

Features & Benefits

- 1 Power on/off, system reset and LEDs for HDD & LAN
- 2 Superior cooling through front air intake
- 3 One(1) external 5.25-inch optical bay supported
- 4 Front access dual USB port
- 5 One(1) external 3.5-inch optical bay supported
- 6 One(1) external slim CD-ROM supported
- 7 Three(3) internal 3.5-inch HDD supported
- 8 Two(2) middle fans for optimized cooling
- 9 Riser card mounting bracket
- 10 One(1) rear 92mm blower for heat dissipation
- 11 Three(3) PCI slots via riser card

Model Number : VTC475352

Order Information : VTC475352

Industry Standard : EIA-RS310D

Materials : Heavy-duty cold-rolled steel

Finish : Inside / Body : Zinc-plated with bright chromate
 Outside / Front : Texture-coated

Dimensions : (W x D x H) mm : 482.6 x 431.8 x 88.9
 inches : 19 x 17 x 3.5

Cooling : Middle: 2 x 80x25mm fans
 Rear: 1 x 97mm blower

●	Descriptions
30X	300W ATX PFC
35X	350W ATX PFC

Expansion : 3 x PCI slots via riser card (full height) or
 7 x PCI slot low profile

Controls : Power on/off and system reset + 2 x USB ports

Indicators : Power, LAN, and HDD LED's

System Board : Up to 12"(W) x 9.6"(D) ATX compliant MB

Drive Bay :	External	5.25"	1
		3.5"	1
		3.5" hot-swap	0
		2.5" hot-swap	0
Internal	3.5"	3	
	Slim CD-Rom/DVD-Rom	1	
	Slim FDD	0	

Temperature : 0°C(32°F) ~ 50°C(122°F)

Humidity : 5%~95% non-condensing

Gross Weight (lbs) : 14 kgs / 30.8 lbs

Packaging Dimension (W x D x H) : mm : 590 x 580 x 240

Cubic Feet : 3

Reference Container Loading :	20'	350
	40'	700
	40' H	800

Riser Card Options :	RC2-007	RC2-012	RC2-012-R
	RC2-PAPTX-PCI	RC2-PAPTX-AGP	RC2-PCITX-3N1
	RC2-PCITX-3S1	RC2-PAPRX16	RC2-E161X2R-3
	RC2-E161X2R-4	RC2-E161P2R-3	
Mounting Options :	BR-2U01	BR-2U03	SR-1U26
	SR-20	SR-26	

Mechanical Drawing

