




# T-MOPSlcdSA

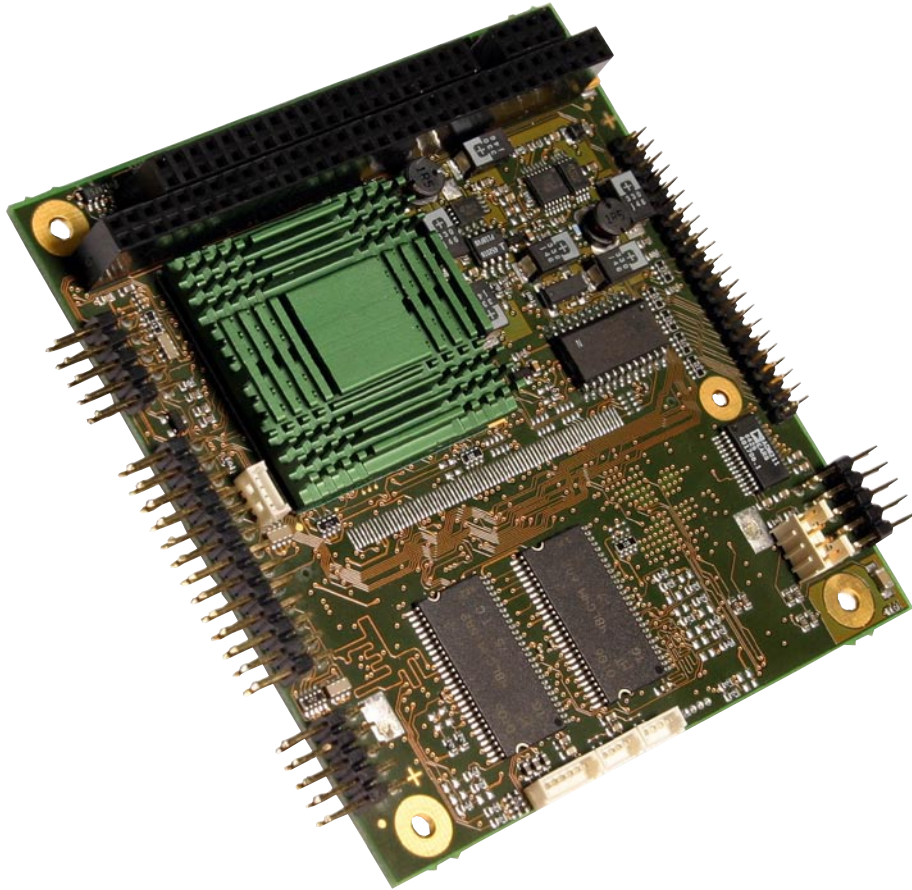

- Made for RUGGED E2 applications (-40°C to +85°C)
- No moving parts
- Real low power embedded PC/104 with STPC ATLAS™
- Onboard CRT-Graphics and Communication

## ➤ Product Overview

The T-MOPSlcdSA runs with the STPC Atlas with 120MHz - fanless - no moving parts. ALL parts used are E2 extended Temperature compliant (-40 to +85°C), that provides full unrestricted warranty at E2 condition use. It features a highly integrated chipset and 32 MByte SDRAM SOLDERED - that means no moving parts and enhanced system reliability. The graphic engine is on chip with 4MB VRAM UMA for CRT.

A watchdog timer and a realtime clock are standard features. The board comes complete 2 x USB, 2 x COM, LPT, EIDE, Keyboard and PS/2. All MOPS PC/104 boards are Plug&Work compatible, which considerably reduces the time to market. All MOPS PC/104 provide the same pinout for keyboard, COM1 and COM2, 44pin IDE, 2xUSB, LPT as well as LAN. This is the common MOPS-family feature, which eases the upgradeability enormously within the Kontron MOPS PC/104-products.

## ➤ Technical Information

- Full PC/104 compliant Industry Standard
- CPU: STPC Atlas 120 MHz
- SDRAM: soldered with 32 MB
- Graphic on chip with 4 MB VRAM  
UMA, CRT Interface
- Panel / CRT -/✓
- 10/100 BaseT Ethernet ✓
- USB 2x, with Legacy support
- EIDE interface ✓
- Printer Interface ✓
- Keyboard/Mouse Controller ✓/✓
- RS232C 2x
- LANBoot ✓
- DarkBoot ✓
- Watchdog ✓
- Real Time Clock ✓
- Dimensions: 96x90 mm (3.8 x 3.6")
- Power supply: 5V only
- Plug'n Play compatible to another MOPS and therefore exchangeable
- Temperature (\*):  
Operation: -40° to +85° C  
Storage: -40° to +85° C
- Max. humidity:  
Operation: 10% to 90%  
Storage: 5% to 95% (non condensing)

(\* ) Ask about wider temperature ranges

## ➤ Ordering Information

| Article     | Part.-No.       | Description   |
|-------------|-----------------|---|
| T-MOPSlcdSA | 01034-3200-12-1 | Low Power STPC ATLAS 120MHz, on chip graphics, soldered 32 MByte SDRAM, 2xRS232C, 2xUSB, LPT, IDE, CRT interface and with 10/100MBit Ethernet |

## ➤ Corporate Offices

### Europe, Middle East & Africa

Kontron AG  
Oskar-von-Miller-Str. 1  
85386 Eching/Munich  
Germany  
Tel.: +49 (0)8165/ 77 777  
Fax: +49 (0)8165/ 77 219  
sales@kontron.com

### North America

Kontron America Corporate Office  
14118 Stowe Drive  
Poway, CA 92064-7147  
USA  
Tel.: +1 888 294 4558  
Fax: +1 858 677 0898  
sales@us.kontron.com

### Asia Pacific

Kontron Asia Inc.  
4F, No. 415, Ti-Ding Blvd.  
Sec.2, NeiHu District  
Taipei Taiwan 114  
Tel.: +886-2-2799-2789  
Fax: +886-2-2799-7399  
sales@kontron.com.tw

### Kontron Embedded Modules

Brunnwiesenstr. 16  
94469 Deggendorf  
Germany  
Tel.: +49 (0)991/ 370 24-100  
Fax: +49 (0)991/ 370 24-333  
sales@kontron.com