


HS-6050

Socket 370 133MHz FSB PICMG Bus SBC with VGA, Audio & Dual LAN

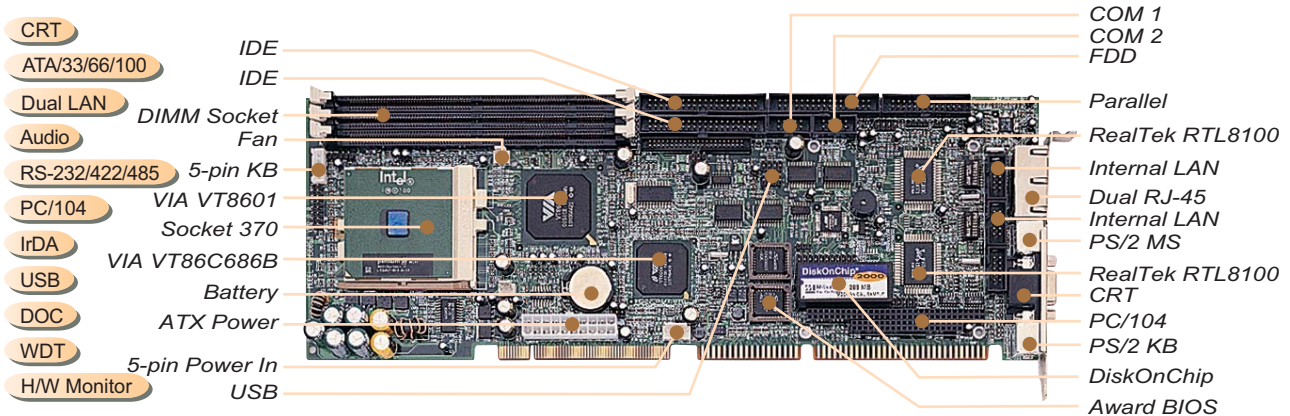

Features

- ✓ Socket 370 for Intel Celeron/ Coppermine/Tualatin and VIA C3 800MHz~1.3GHz CPU
- ✓ VIA VT8601/VT82C686B system chipset
- ✓ Supports 66/100/133MHz FSB
- ✓ Three DIMM sockets with a max. capacity of 1.5GB
- ✓ VIA VT82C686B super I/O chipset
- ✓ Fast PCI ATA/33/66/100 IDE controller
- ✓ One RS-232 and one RS-232/422/485 serial ports
- ✓ PC/104 Bus connector
- ✓ VIA VT8601 CRT display controller
- ✓ Dual RealTek RTL8100 10/100 Based LAN
- ✓ AC97 3D audio controller
- ✓ DiskOnChip socket supporting memory sizes of up to 288MB
- ✓ Supports Hardware Monitor function

Specifications

- * **CPU:** Socket 370 for Intel Celeron/ Coppermine/Tualatin and VIA C3 800MHz~1.3GHz CPU
- * **Bus Interface:** PICMG Bus
- * **Memory:** Three DIMM sockets supporting up to 1.5GB
- * **Chipset:** VIA VT8601/VT82C686B
- * **I/O Chipset:** VIA VT82C686B
- * **VGA:** VIA VT8601 integrated Trident Blade 3D supporting AGP Bus
- * **IDE:** Four IDE disk drives supporting ATA/33/66/100 and with transfer rates up to 33/66/100MB/sec.
- * **FDD:** Supports up to two floppy disk drives
- * **Parallel:** One enhanced bi-directional parallel port supporting SPP/ECP/EPP
- * **LAN:** Dual RealTek RTL8100 10/100 Based LAN
- * **Audio:** AC97 3D audio controller
- * **Serial Port:** 16C550 UART-compatible RS-232/422/485 x 1 and RS-232 x 1 serial ports with 16-byte FIFO
- * **PC/104:** PC/104 connector for 16-bit ISA Bus

- * **IrDA:** One IrDA TX/RX header
- * **USB:** Two USB connectors
- * **Keyboard:** PS/2 6-pin Mini DIN or 5-pin connector
- * **Mouse:** PS/2 6-pin Mini DIN or 4-pin header
- * **DiskOnChip:** DiskOnChip socket supporting memory sizes of up to 288MB
- * **BIOS:** AMI PnP Flash BIOS
- * **Watchdog Timer:** Sets 1, 2, 10, 20, 110, 220 seconds activity trigger with Reset or NMI
- * **CMOS:** Battery backup
- * **DMA Channels:** 7
- * **Interrupt Levels:** 15
- * **Operating Temperature:** 0~60°C
- * **Hardware Monitor:** VIA VT82C686B
- * **Board Size:** 33.6 X 12.1 cm

Ordering Guide

◎ HS-6050

Socket 370 133MHz FSB PICMG Bus SBC with VGA, Dual LAN & Audio

◎ HS-6050V

Socket 370 133MHz FSB PICMG Bus SBC with VGA

Specifications are subject to change without notice.

The Industrial PC Authority



BOSER Technology Co., Ltd.

15F-6, No. 77, Hsin Tai Wu Road, Sec. 1, Hsichih, Taipei Hsien 221 Taiwan TEL : 886-2-26983333 FAX : 886-2-26983300
<http://www.boser.com.tw> <http://www.isb.com.tw> E-Mail: webmaster@boser.com.tw

U.S.A.
 TEL : +1 650 4280868
 FAX : +1 650 4281172

GERMANY
 TEL : +49 221 954790
 FAX : +49 221 9547988

KOREA
 TEL : +82 2 34737862
 FAX : +82 2 34743120

JAPAN
 TEL : +81 3 34248120
 FAX : +81 3 34180521

ISRAEL
 TEL : +972 3 9203456
 FAX : +972 3 9203535

FRANCE
 TEL : +33 1 69061790
 FAX : +33 1 69433732

FINLAND
 TEL : +358 2 6203753
 FAX : +358 2 6203770

SHANGHAI
 TEL : 021 62789292
 FAX : 021 62789393

BEIJING
 TEL : 010 82660235
 FAX : 010 82660241