

BPC-3010-F

10.4" Panel PC with Touch Screen, P-M/ULV C-M, 3 COM, 6 USB, 70W P/S

Panel PC



Features

- » Aluminum front panel design
- » 10.4" TFT color panel display w/touch screen
- » Supports Intel® P-M/ULV C-M processor TDP ≤ 24.5W
- » VGA, dual Ethernet, Audio port
- » 1 x 2.5" HDD space
- » 1 x CF socket
- » 3 x COM port, 6 x USB2.0 port
- » 70W power supply
- » 1 x 4cm ball bearing cooling fan

System

LCD

Size: 10.4"
Max. Resolution: 800 x 600 pixels
Brightness: 250 cd/m²
Max. Color: 262,144 colors
Pixel Pitch: 0.264 x 0.264 mm

Touch Screen

10.4" resistive

SBC

HS-2610(M)

CPU

Intel® Pentium® M processor 1.8GHz or ULV
Celeron® M processor 600MHz/512K (option)

System Chipset

Intel® 852GM(E)/ICH4

System Memory

1 x 200-pin SO-DIMM, DDR 333MHz(HS-2610)/DDR
266MHz(HS-2610M), Max. 1GB

Display Interface:

1 x D-SUB 15-pin
1 x Brightness controller

Audio Interface

Audio jack for MIC In, Line Out

Ethernet Interface

2 x RJ-45 for Ethernet

Storage

1 x 2.5" HDD space
1 x Type II CF socket

Watchdog Timer

Software programmable time-out intervals from
1~255 sec. or 1~255 min.

H/W Status Monitor

Monitoring temperatures, voltages, and cooling fan
status

Thermal Solution

1 x 4cm ball bearing cooling fan

Power

70W power supply

Operating/Storage Temperature

0~50°C/-20~+70°C

Certification

FCC/CE Class A compliance
IP65 front panel protection compliance


Dimensions

28.5(L) x 22.5(H) x 8.3(W) cm


Cut Out Size

26.6(L) x 20.1(H) cm

I/O Interface

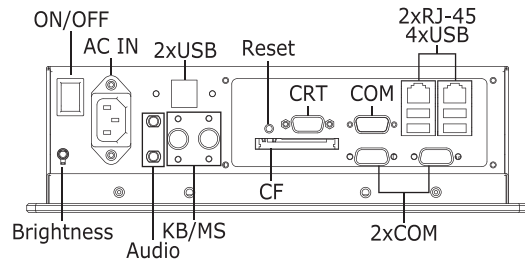

Dimensions (unit:cm)

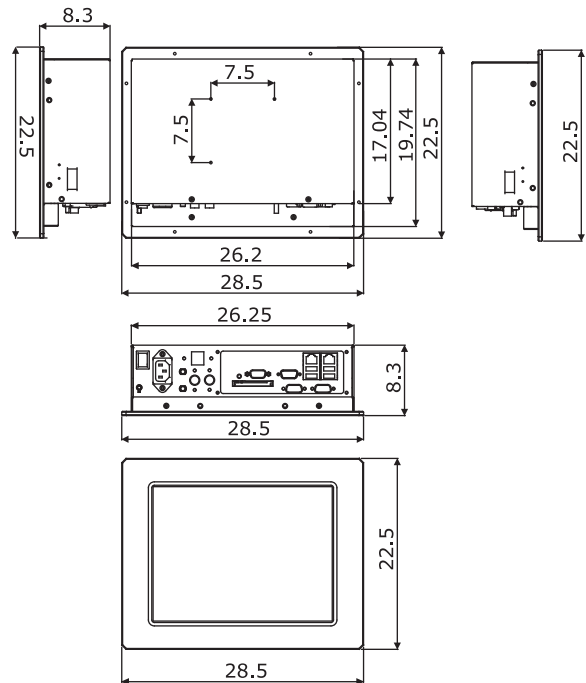

Ordering Information

BPC-3010-F9

10.4" Panel PC w/Touch Screen, 3 COM, 6 USB, 70W
P/S

BPC-3010-F0

10.4" Panel PC w/Touch Screen, ULV C-M 600MHz CPU,
3 COM, 6 USB, 70W P/S

Accessory Options

Table Top Metal Stand, CPU, Memory Module, CF
Module, 2.5" HDD