


1 IB781 **NEW**

Socket 370 Full-Size CPU Card w/ VIA CLE266 Chipset

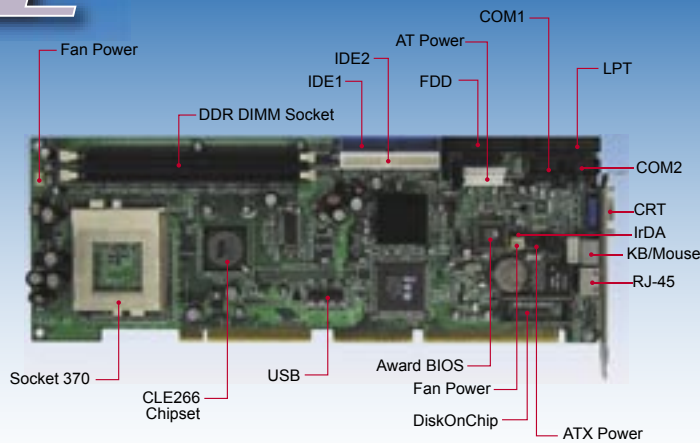

Features

- Supports Pentium® III / Celeron® processors
Up to 1.4GHz, 100/133MHz FSB
- DDR DIMM x 2, max. 2GB
- Integrated VGA, shared memory
- Realtek 10/100 or Gigabit LAN
- 4 x USB 1.1, ISA High Drive, Watchdog timer
- DiskOnChip®, PCI to ISA bridge (Slave)

System

CPU	Socket 370 for Pentium® III / Celeron®, up to 1.4GHz
System Memory	DDR DIMM x 2, max. 2GB
System Chipset	VIA CLE266 + VT8235, 100/133MHz FSB
BIOS	Award 4Mbit
Watchdog Timer	256 levels
SSD	DiskOnChip®
H/W Monitor	Yes
Expansion Slot	N/A

Graphics

VGA Controller	VIA VT8623 integrated
VGA Memory	Shared memory Max. 64MB
LCD Interface	24-bit TTL

Ethernet

LAN Controller	Realtek RTL8100C 10/100Mbps or RTL8110s-32 Gigabit LAN
Connector	RJ-45 on board

Multi I/O

Chipset	Winbond W83697HF 2x IDE (UDMA33/66/100/133), 1x FDD, 1x KB, 1x Mouse, 1x RS-232, 1x RS-232/422/485, 1x LPT
USB	Pin header for 4 ports (USB 2.0)
Audio	Built-in audio + AC97 codec
Others	IrDA

Mechanical and Environmental

Dimensions	338mm x 122mm (13.31" x 4.8")
Max. Power Requirement	Pentium® III 1.4GHz w/ 512MB DDR +5V: 8.94A +12V: 1.84A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-68°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

IB781	Socket 370 Full-Size CLE266 CPU card w/ VGA and 10/100 Ethernet
IB781F	Socket 370 Full-Size CLE266 CPU card w/ VGA and Gigabit Ethernet

CPU Cards 1

Disk-Size SBCs 2

Motherboards 3

ETX CPU Module 4

CompactPCI 5

PC/104 Plus 6

Firewall 7

ETX Baseboard & Backplane 8

MiniPCI MicroAGP & MicroPCI 9