


➤ ETX[®]-CN8

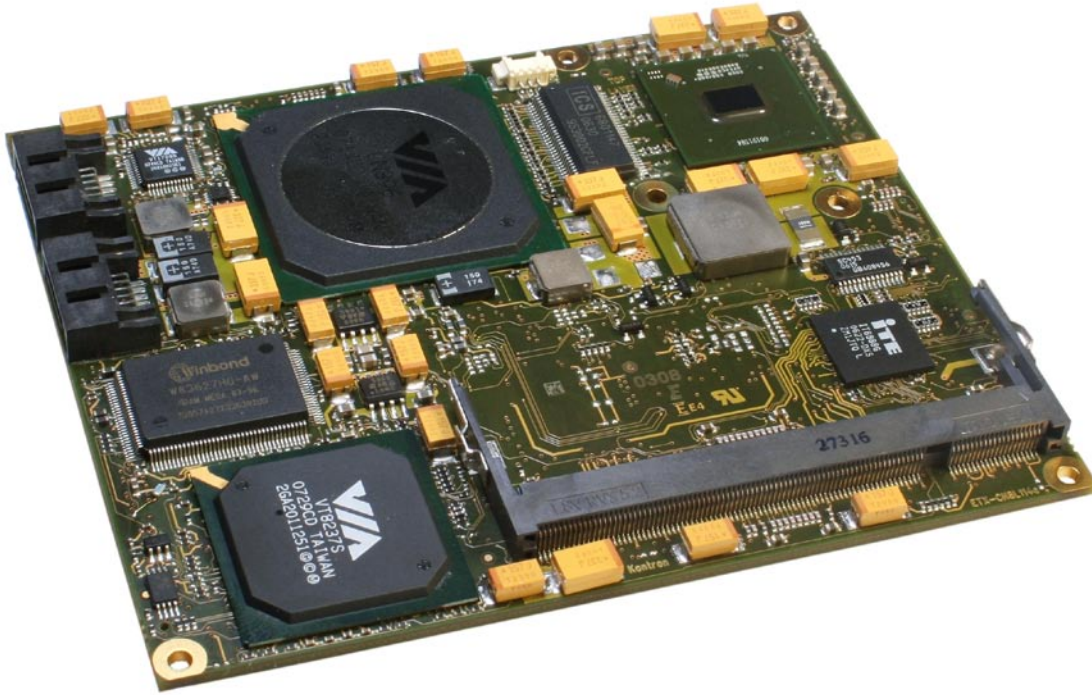

- With VIA C7[®]/Eden[®] processor, VIA CN896 and VIA VT8237S
- ETX 3.0 – Long Term Support
- 2x Serial ATA 300 for highspeed drives
- Up to 2 GB DDR2 SODIMM memory
- Windows Vista[®] support

➤ Product Overview

ETX®-CN8 is the latest Computer On Module based on ETX® 3.0 standard. The new ETX®-CN8 module is based on the VIA C7® processor and VIA Eden® processor as well as the VIA CN896 and VIA VT 8237S chipset.

ETX®-CN8 modules also will provide the following interfaces that are always located in the same physical position on each board, thus guaranteeing scalability between modules.

It also takes advantage of the new ETX® 3.0 specification that allow for 2 Serial ATA 300 ports without violating the existing ETX® 2.8 pin usage.

For further expansions two IDE ports with Ultra66

DMA capabilities are available. They do not provide the PCI bus only, the ISA bus signals are also available. A lot of existing ISA boards can still be used via an ISA slot on a baseboard. This avoids expensive redesigns and well proven ISA cards to PCI versions for standard PC motherboards.

PCI32, USB 2.0, Serial ATA 300, Parallel ATA, LVDS Multi-Media ports as well as an ACPI (Advanced Configuration and Power Interface) for optimized power management. The JILI display interface technology ensures automatic setting of the video controller parameters for the attached LCD panel. Five mounting holes on the board provide secure mounting to allow the module increased shock and vibration resistance.

➤ Technical Information

Processor	VIA C7® processor and VIA Eden® processor
Chipset	VIA CN896, VIA VT8237S
SATA	2x Serial ATA 300 (ETX 3.0 compliant); supports RAID 0,1
IDE	2x EIDE UDMA66
USB	4x USB 2.0 (UHCI / EHCI)
Memory	Up to 2 GB DDR2 (400/533/667) SODIMM memory
PCI	PCI 2.2, 32 bit / 33 MHz PCI bus
Ethernet	VIA VT6103L 10/100 MBit Base-T-PHY
Sound	VIA VT1618 AC 97 controller, Line In, Line Out, Mic in
Video Controller	VIA CN896 integrated Internal UMA video, up to 64 MByte (opt. 128 MByte) VIA Uni (Chrome Pro™ HCDX9 IGP) Dual Independent Display Support

Serial Ports	2 serial Com ports
CRT / LVDS Resolution	max. CRT WUXGA (1920x1440), max. LCD UXGA (1600x1200), (JILI3/EDID support)
Enhanced Parallel Port	Shared with Floppy
Floppy Port	Floppy Port
Other Features	JIDA Support, IrDA1.1 enhanced, WakeOnLAN, Watchdog, I²C Bus, RTC, E²PROM BIOS Setup, LAN Boot, JRC support, Suspend states (S0/S3/S4/S5)
Operating Systems	WinXP, WinXPc, Win CE, Linux, Windows VISTA®
Dimensions	95 x 114 mm
Power Consumption	typical 9,3W @ 5V (VIA Eden® processor 500 MHz)
Temperature (*)	operation: 0° to 60°C, storage: -30° to 85°C
Humidity	operation: 10% to 90%, storage: 5% to 95% (non condensing)

(*) Ask about wider temperature ranges

➤ Ordering Information

Article	Part.-No.	Description
ETX®-CN8	18031-0000-05-2	with VIA Eden® processor 500MHz with CN896
ETX®-CN8	18031-0000-15-0	with VIA C7® processor 1.5GHz with CN896
ETX®-CN8-HSP	18031-0000-99-0	HSP-ETX®-CD threaded stand off
ETX®-CN8-HSP	18031-0000-99-1	HSP-ETX®-CD through hole stand off

➤ Corporate Offices

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 219
sales@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
sales@us.kontron.com

Asia Pacific

17 Building,Block #1,ABP.
188 Southern West 4th Ring Road
Beijing 100070,P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
kcn@kontron.cn

Kontron Embedded Modules

Brunnwiesenstr. 16
94469 Deggendorf
Germany
Tel.: +49 (0)991/ 370 24-100
Fax: +49 (0)991/ 370 24-333
sales@kontron.com