DIMM-PC/ETIS

← 68 mm (2.7″) →

DP144-Interface

40 mm (1.6″)

Picture in original size!

Technical Data

- **ISDN Adapter**
  16 Bit, passive
  S0 interface with 4 pins

- **2 B-channels**

- CAPI and Hayes command language

- **Datatransfer**
  2 x 64 kBit/s (B-channels)
  1 x 16 kBit/s (D-channel)
  Combination of channels possible

- **Protocols:**
  B-channel transparent mode,

- HDLC, X.75, T.70, T.90, X.25
  Eurofiletransfer (ISO 8208)
  D-channel Euro-ISDN (DSS1)

- **Supported operating systems:**
  MS DOS®, Windows® 3.1x,
  Windows® 95, Windows® 98,
  Windows® NT 4.0, Linux

- **Ethernet Part**
  ISA Ethernet adapter
  Crystal LAN® CS8900
  IEEE802.3 compliant
  half and full duplex
  10 MBps
  I/O-address selectable

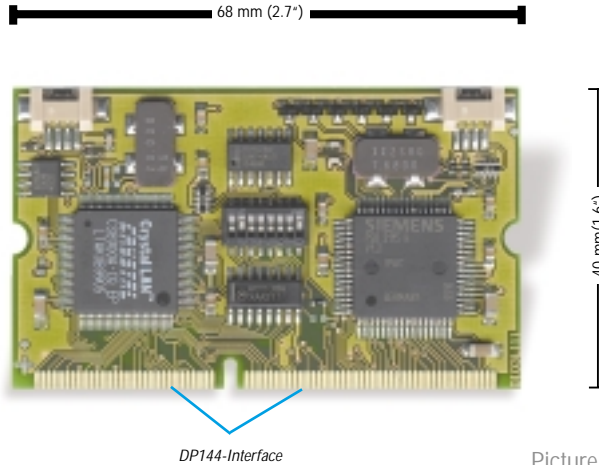## Description

The DIMM-PC/ETIS module expands the **DIMM-PC®** concept by ISDN and Ethernet functionality. The ISDN signals are available at second, very small board which can be mounted easily within any application. The Ethernet signals are available at the DIMM-PC-Bus. With this module wide connectivity becomes reality for your applications.

Ordering Information

Article	Part.-No.	Description
DIMM-PC/ISDN	08008-0000-00-0	ISDN module for DIMM-PC®
DIMM-PC/ETIS1	08008-0000-01-0	ISDN and Ethernet module for DIMM-PC®