


Rigid-310

Extreme Rugged, Intel® Atom™ N270, Fanless Embedded Controller



Features

- **Wide Operating Temperature (-40 ~ 70°C)**
- Ultra Low Power and Fanless Design
- Dual Independent Displays via Analog RGB and DVI Port
- 1 x Outside Accessible CF Slot
- Wide Range DC Power Input (10~28V)
- Ultra Low Profile Enclosure (33mm Height Max.)
- Rugged Design for Shock/Vibration Protection
- Easy Installation/Maintenance

System

CPU	Soldered onboard Intel® Atom™ N270 1.6GHz CPU with 533MHz FSB
Memory	Soldered onboard 1GB DDR2-533 SDRAM
Chipset	Intel® 945GSE + ICH7M
Graphics	Integrated Intel® GMA950 GFx Core in 945GSE GMCH
ATA	1 x Serial ATA port with 150MB/s HDD transfer rate
LAN Chipset	2 x Realtek 8111 Gigabit Ethernet controllers
Watchdog Timer	1~255 levels reset

I/O

Serial Port	1 x RS-232 port with RJ-45 connector 2 x RS-232/422/485 selectable ports with RJ-45 connector
USB Port	6 x USB 2.0 ports
LAN	2 x RJ-45 ports for Gigabit Ethernet
Video Port	1 x DB-15 female connector for Analog RGB 1 x DVI-D female connector for Digital Video Output
Audio	Mic-in/Line-in/Line-out (6W pre-amplified)
Expansion Bus	1 x Mini-card slot

Environmental

Operating Temp.	-40 ~ 70°C (-40 ~ 158°F), ambient w/ air flow
Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
Vibration	3 Grms/5~500Hz/random operation
Shock & Crash	Operating 20G (11ms), Non-operating 60G with HDD Operating 40G (11ms), Non-operating 80G with CF/SSD Crash 100G (11ms)

Qualification

Certification	CE, FCC
----------------------	---------

Power System

Power Input	DC 10~28V input (w/ 1 x 2-pin DC input terminal block)
Power Consumption	25W (Max.)
Power Adapter	65W AC/DC adapter


Storage

Type	1 x 2.5" drive bay for HDD/SSD 1 x CompactFlash Type II Socket (outside accessible)
-------------	--

Mechanical

Construction	Aluminum alloy
Mounting	Wall-mount (Default integrated)/VESA-mount/Din rail mounting
Weight	1.89 kg (4.16 lb), w/o storage device
Dimensions (W x D x H)	252 x 199 x 33 mm (9.92" x 7.83" x 1.3")

Drawing

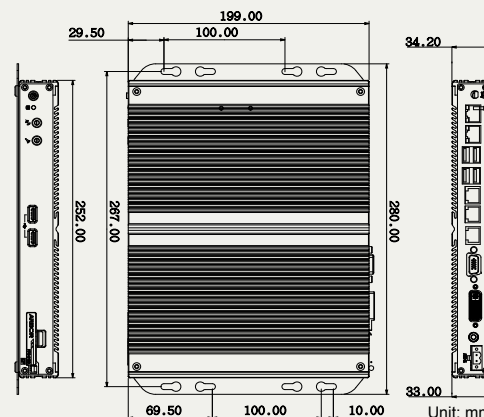

Ordering Information

Rigid-310	Fanless embedded controller
DRK-001	Din rail mounting kit of FPC series
VMK-3100	FPC-3100 VESA-mount kit
SSD-25080	Intel® 2.5" 80GB SATAII SSD kit