

PMC521 Octal Serial 422/485 Communication

These modules provide eight asynchronous serial communication ports from a single PMC carrier slot. Software-configuration helps you quickly set baud rates, character-sizes, stop bits, and parity.

For more efficient data processing, each serial port is equipped with 64-character FIFO buffers on the transmit and receive lines.


The data ports generate individually controlled transmit, receive, line status, data set, and flow control interrupts. A global interrupt source register provides interrupt status indication for all eight channels to speed up interrupt parsing.

Features

- Eight asynchronous, full duplex RS422B serial ports (supports RS485)
- 64-byte transmit FIFO buffers
64-byte receive FIFO buffers
- Programmable baud rate (up to 250Kbps)
- Line-break and false start-bit detection
- Failsafe receivers
- Socketed termination and bias resistors
- Industry-standard software-compatible 16C550 configuration registers

Benefits

- High-density design lowers per-port costs and saves PMC carrier card slots for other functions.
- 64-byte FIFO buffers minimize CPU interaction for improved system performance.
- Extended temperature ranges deliver dependable operation in extreme conditions.

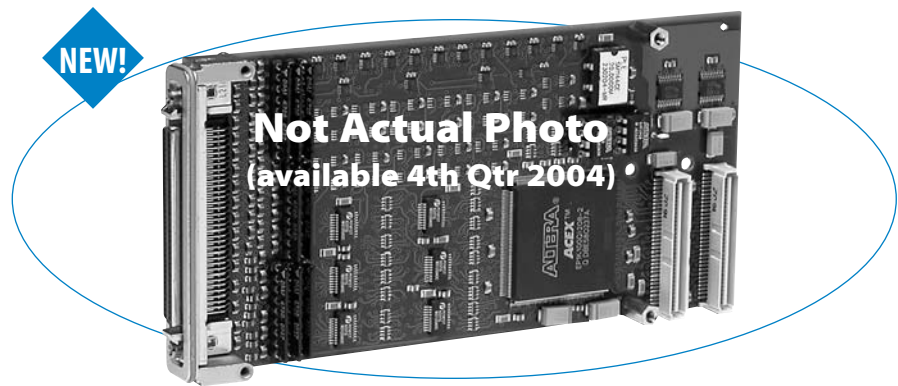

With eight serial ports per module, the PMC521 provides a high-density solution to reduce costs and use fewer card slots.

Specifications

RS422B Serial Ports

Configuration: Independent, non-isolated serial ports with a common single return connection.
 Data rate: 250K bits/second, maximum.
 Max. cable length: 1200 meters (4000 feet), typical.
 Character size: 5 to 8 bits, software-programmable.
 Parity: Odd, even, or no parity; software-programmable.
 Stop bits: 1, 1-1/2, or 2 bits; software-programmable.
 Data register buffers: Double buffered or 64-byte FIFO buffered, mode selectable.

Interrupts: Receiver line status (overrun, parity, framing error, or break interrupt); receive/transmit FIFO level reached or character time-out; Xon/Xoff or special character detected.

Environmental

Operating temperature: 0 to 70°C (PMC521-64) or -40 to 85°C (PMC521-64E).
 Storage temperature: -55 to 125°C.
 Relative humidity: 5 to 95% non-condensing.
 Power: +5V (±5%), consult factory for current specifications.
 MTBF: Consult factory.

PMC Compliance

Conforms to PCI Local Bus Specification, Revision 2.3 and CMC/PMC Specification, P1386.1.
 4K Memory Space Required: One Base Address Register.
 Signaling: 3.3V and 5V compliant.

Ordering Information

PMC Modules

PMC521-64

Eight RS422B serial ports, front I/O connector

PMC521-64E

Same as PMC521-64 plus extended temperature range.

PMC521-64R

Same as PMC521-64 except with rear I/O connector

PMC521-64RE

Same as PMC521-64R plus extended temperature range

Customized PMC Modules

† 5086-x

Modified PMC521-64 with user-specified crystal/baud rate.

† Specify x = crystal frequency when ordering.

Minimum quantity per order is two units.

Software (see Catalog 8400-139 for more info)

PMCSW-API-VXW

VxWorks® software support package

PCISW-API-QNX

QNX® software support package

PCISW-API-WIN

Windows® DLL software support

Accessories (see Catalog 8400-139 for more info)

5025-288

Termination panel, SCSI-3 connector, 68 screw terminals

5028-432

Cable, shielded, SCSI-3 connector both ends

All trademarks are the property of their respective owners.