


VTC760581

Applications

- Internet Server (Web / Mail)
- Database Server
- File Server
- NAS / iSCSI
- CCTV Surveillance DVR

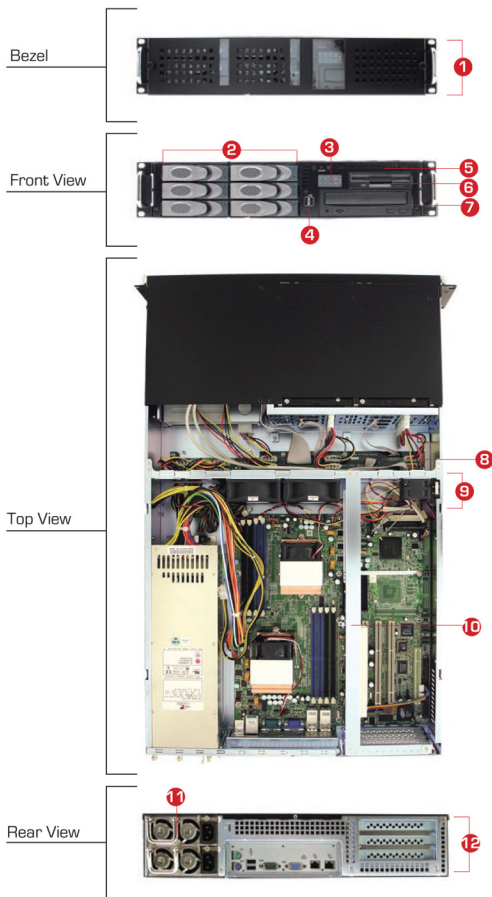

Features & Benefits

- 1 Front bezel for data security and protection
- 2 Six(6) external 3.5-inch hot-swap HDD supported
- 3 Power on/off, system reset and LEDs for HDD & LAN
- 4 Front access dual USB port
- 5 One(1) external slim CD-ROM supported
- 6 One(1) external 3.5-inch bay supported
- 7 One(1) external 5.25-inch bay supported
- 8 Power distribution board to minimize cabling
- 9 Three(3) hot-swap middle fans for optimized cooling - [Three(3) extra fans for upgrade]
- 10 Riser card mounting bracket
- 11 Hot-swap redundant power supply (1+1 module) maximizes server protection
- 12 Three(3) PCI slots via riser card



Model Number : VTC760581

Order Information : VTC760581

Industry Standard : EIA-RS310D

Materials : Heavy-duty cold-rolled steel

Finish : Inside / Body : Zinc-plated with bright chromate
Outside / Front : Texture-coated

Dimensions : (W x D x H)
mm : 482.6 x 685.8 x 88.9
inches : 19 x 27 x 3.5

Cooling : Middle: 2 x 80x32mm + 1 x 40x28mm easy-swap fans (+ optional 3 x 40x28mm)

	●	Descriptions
Power Supply :	46E	460W EPS-12V PFC VTC760581
	46R	460W 1+1 hot-swap VTC760582
	50E	500W EPS-12V PFC VTC760583
	60E	600W EPS-12V PFC VTC760584
	60R	600W 1+1 hot-swap VTC567913

Expansion : 3 x PCI slot via riser card (full height, full length)
7 x PCI slot low profile

Controls : Power on/off and system reset + 2 x USB ports

Indicators : Power, LAN, and HDD LED's

Speakers : 0.4W built-in

System Board : Up to 12"(W) x 13"(D) size ATX/SSI EEB 3.6 compliant motherboard

Drive Bay :	External	5.25"	1
		3.5"	1
		3.5" hot-swap	6
		2.5" hot-swap	0
Internal		3.5"	0
		Slim CD-Rom/DVD-Rom	1
		Slim FDD	0

Temperature : 0°C(32°F) ~ 50°C(122°F)

Humidity : 5%~95% non-condensing

Gross Weight : 17 kgs / 37.4 lbs

Packaging Dimension (W x D x H) : mm : 850 x 580 x 250

Cubic Feet : 4.4

Reference Container Loading :	20'	238
	40'	477
	40' H	545

Backplane :	■	Descriptions
	SS2	Serial ATA (SATA) 3G
	SC3	Parallel SCSI U320
	SA10	SAS 3.0 (non-SEP)

Riser Card Options :	RC2-007	RC2-012	RC2-012-R
	RC2-PAPTX-PCI	RC2-PAPTX-AGP	RC2-PCITX-3N1
	RC2-PCITX-3S1	RC2-PAPRX16	RC2-E161X2R-3
	RC2-E161X2R-4	RC2-E161P2R-3	

Mounting Options :	BR-2U01	BR-2U03	SR-26
--------------------	---------	---------	-------

Mechanical Drawing

