

Accessories

Mounting Methods, Terminals, Varistors, Cover and Marker





Mini-Mount/Standard Mount Bracket

Description

Provides a convenient method of mounting 2 x 2 x 1.21 in. (50.8 x 50.8 x 30.7 mm) or 2 x 3 x 1.5 in. (50.8 x 76.2 x 38.1 mm) modules. The 90° orientation of mounting slots makes installation/removal of modules quick and easy. The P1023-6 secures to module with a #8 (M4 x 0.7) screw. The P1023-7 secures to 2 x 2 x 1.21 in. (50.8 x 50.8 x 30.7 mm) module with Mini-Pot for local adjustment. Made from steel with a cadmium surface finish.

Mounting Method	Mounting Hole Size	P/N
#8 (M4 x 0.7) screw	0.19 in. (4.8 mm)	P1023-6
Mini-Pot	0.25 in (6.35 mm)	P1023-7

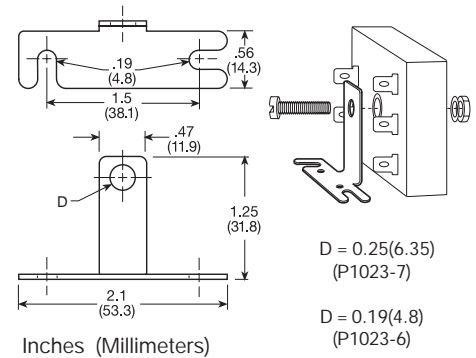


Front Panel Mount Kit

Description


Provides an easy method of through-the-panel mounting of 8 or 11 pin plug-in timers, flashers, and other controls. May be mounted in panels up to 0.125 in. (3.2 mm) thick. Includes two clamps and two screws.

P/N: BZ1

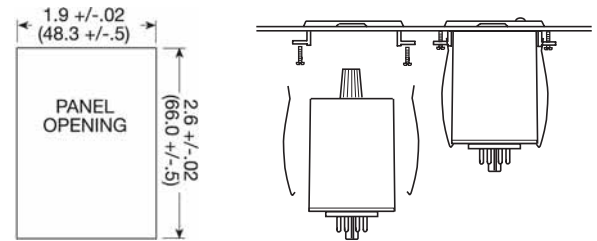

Inches (Millimeters)

Illustrates panel opening size required to mount BZ1.




DIN Rail Mount Adaptor

Description

Allows any 2 x 2 in. (50.8 x 50.8 mm) or 2 x 3 in. (50.8 x 76.2 mm) module to be mounted on a 35 mm DIN type rail. Comes complete with mounting hardware for 0.75 in. (19 mm) and 1 in. (25.4 mm) thick modules.

P/N: P1023-20



Mounting hole for #8 (M4 X 0.7) bolt
Inches (Millimeters)




Back Panel Mount Adaptor

Description

Provides a method for mounting 35 mm DIN 3 mounting timers and controls on the equipment's enclosure or back panel. Mount with two #6 (M3.5 x 0.6) screws.

P/N: 1SVR 430 029 R 0100

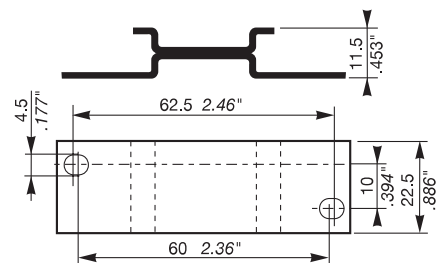

Heat Sink Compound

Description

Bulk heat sink compound sufficient to mount over 50 high current, plated 2" x 2" (50.8 x 50.8 mm) timers or flashers. Contains approximately 100 grams.

P/N: P0200-20

Accessories

Mounting Methods, Terminals, Varistors, Cover and Marker




Quick Connect Screw Adaptor

Description

Screw adaptor terminal designed for use with all modules with 0.25 in. (6.35 mm) male quick connect terminals. Screw terminal accepts ring or spade terminals.

P/N: P1015-18



L = 0.55 (41.0)
W = 0.32 (8.1)
Inches (Millimeters)




Female Quick Connect Terminals

Description

These 0.25 in. (6.35 mm) female terminals are constructed with an insulator barrel to provide strain relief.

Part Number	Wire Size
P1015-13	AWG 10/12 (5.3/3.2 mm ²)
P1015-64	AWG 14/16 (2.5/1.3 mm ²)
P1015-14	AWG 18/22 (0.93/0.33 mm ²)



L = 0.83 (21.1)
W = 0.3 (7.6)
Inches (Millimeters)



Metal Oxide Varistors

P/N	Max. Operating Voltage		Max Impulse Current 80/20 us current wave (A)	Varistor Voltage at 1 mA DC Test Current		Peak Clamping Voltage with 80 us wave		Capacitance (pF)	Size (mm)
	DC (V)	AC (V)		Min.(V)	Max.(V)	Vc (V)	Ip (A)		
P1012-27	200	150	1200	212	268	395	10	150	7
P1012-25	200	150	4500	212	268	395	50	800	14
P1012-3	369	275	1200	389	515	775	10	85	7
P1012-6	369	275	4500	389	475	710	50	450	14




Sealable Transparent Cover

Description

Protection against unauthorized adjustments of 22.5 mm and 45 mm IEC type timers and controls.

Part Number	Cover Size
1SVR 430 005 R 0100	22.5 mm
1SVR 440 005 R 0100	45 mm

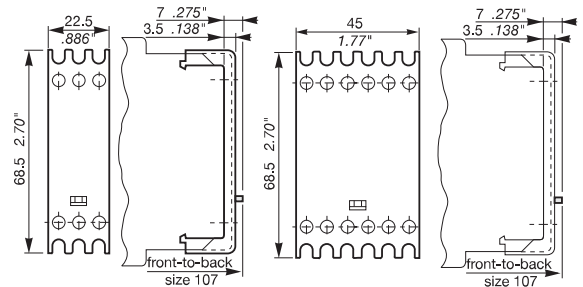

Cover for 22.5 mm

Cover for 45 mm



Marker Insert

Description

Replacement unit marker insert for use with 22.5 mm and 45 mm IEC timers and controls that include replaceable markers.

P/N: 1SVR 366 017 R 0100

