


X7SBA

Products Motherboards Xeon® 3200/3000 Boards [X7SBA]

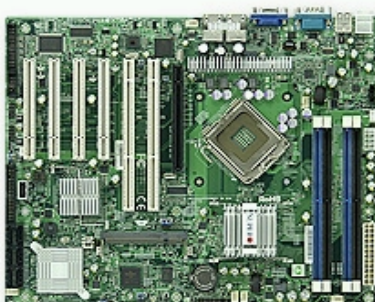

- RoHS Compliant
- Best Thermal Optimized Design
- Most Cost Effective LAN Solution

Key Features

1. Intel® Xeon® 3000 Sequence and Core™ 2 Quad / Duo Series in LGA775 Package (FSB 1333/1066/800 MHz)
2. Intel® 3210 + ICH9R Chipset
3. Up to 8GB unbuffered ECC / nonECC DDR2 800/667 SDRAM
4. 1x Intel® 82573V PCIe Gigabit LAN
1x Intel® 82573L PCIe Gigabit LAN
5. Built-in SATA ICH9R Controller
6x SATA (3 Gbps) Drive with RAID 0, 1, 5, 10 Support
6. 1 (x8) PCIExpress (using x16 slot),
2 64 bit PCIX 133 / 100,
4 32 bit PCI slots
7. On-board XGI Z9S 32MB Graphics
8. IPMI 2.0 Support

Links & Resources

- [Tested Memory List](#)
- [Motherboard Manual](#)
- [Update Your BIOS](#)
- [Download the Latest Drivers and Utilities](#)

Specifications

| Product SKUs | |
|----------------------------|---|
| MBD-X7SBA-O | ▪ X7SBA (Standard Retail Pack) |
| MBD-X7SBA-B | ▪ X7SBA (Bulk Pack) |
| Physical Stats | |
| Form Factor | ▪ ATX |
| Dimensions | ▪ 12" x 9.6" (30.5cm x 24.4cm), 6 layers |
| Processor/Cache | |
| CPU | <ul style="list-style-type: none"> ▪ Single LGA775 ZIF Socket ▪ Supports Quad-Core Intel® Xeon® X3300/X3200 series ▪ Supports Dual-Core Intel® Xeon® E3100/3000 series ▪ Supports Intel® Xeon® processor L3360 and L3110 series ▪ Supports Intel® Core™2 Quad Q9000/Q8000/Q6000 series ▪ Supports Intel® Core™2 Duo E8000/E7000/E6000/E4000 series ▪ Supports Intel® Pentium® E5000/E2000 series ▪ Supports Intel® Celeron® E1000 and 400 series ▪ NOTE: Intel Xeon processor L3014 requires an LGA771 socket and is not supported. |
| System Bus | ▪ 1333 / 1066 / 800 MHz system bus |
| System Memory | |
| Memory Capacity | <ul style="list-style-type: none"> ▪ Four 240-pin DIMM sockets ▪ Supports up to 8 GB of unbuffered ECC / nonECC DDR2 667/800MHz memory (Dual Channel) |
| Memory Type | ▪ DDR2 800/667MHz unbuffered ECC / non-ECC SDRAM, 240pin gold-plated DIMMs |
| DIMM Sizes | ▪ 256 MB, 512 MB, 1 GB, 2GB |
| Memory Voltage | ▪ 1.8V only |
| On-Board Devices | |
| Chipset | <ul style="list-style-type: none"> ▪ Intel® 3210 chipset ▪ ICH9R + PXH/Vchipset |
| Serial ATA | <ul style="list-style-type: none"> ▪ Intel® ICH9R SATA2 (3 Gbps) controller built-in ▪ RAID 0, 1, 5, 10 support (Windows Only) ▪ RAID 0, 1, 10 support (Linux) |
| IPMI | <ul style="list-style-type: none"> ▪ Support for Intelligent Platform Management Interface v.2.0 ▪ SIMSO Slot- Supermicro Intelligement Management ▪ (Optional: AOC-SIMSO-HTC) |
| Network Controllers | <ul style="list-style-type: none"> ▪ 1x Intel® 82573V Gigabit PCIExpress Ethernet ▪ 1x Intel® 82573L Gigabit PCIExpress Ethernet ▪ Supports 10Base-T, 100Base-TX, 1000BASE-TX, RJ45 output |
| VGA | ▪ On-board XGI Z9S 32MB Graphics |
| Super I/O | ▪ Winbond 83627HF chip |
| Clock Generator | ▪ CK505 |
| Input / Output | |
| Serial ATA | <ul style="list-style-type: none"> ▪ Six Serial ATA ports (3 Gbps performance) ▪ Six SATA hard drives supported |
| Floppy | ▪ 1 Floppy controller; 1.44 MB |
| LAN | ▪ 2 x RJ45 LAN port |
| USB | <ul style="list-style-type: none"> ▪ 7x USB 2.0 / 1.1 compatible ▪ 2 rear + 1 Type A connectors + 2 headers (4 ports) |
| VGA | ▪ 1x VGA Port |
| Keyboard / Mouse | ▪ PS/2 keyboard and mouse ports |
| Serial Ports | <ul style="list-style-type: none"> ▪ 1x Fast UART 16550 serial port ▪ 1x Header |
| Parallel Ports | ▪ 1x ECP/EEP Parallel Header |

| Chassis (Optimized for X7SBA) | |
|---|--|
| 2U Chassis | <ul style="list-style-type: none"> ▪ CSE822T-400LPB ▪ CSE823T-R500LP ▪ CSE825MTQR700LPB |
| Mid-Tower | <ul style="list-style-type: none"> ▪ CSE733E-465B ▪ CSE733i-465B ▪ CSE733T-465B ▪ CSE733TQ-465B |
| Tower / 4U Rackmount | ▪ CSE743TQ-865B |
| Expansion Slots | |
| PCI-Express | ▪ 1 (x8) PCIe (using x16) slot |
| PCI-X | ▪ 2x 64-bit 133 / 100MHz PGX (3.3V) slot |
| PCI | ▪ 4x 32-bit 33MHz PCI (5V) slot |
| System BIOS | |
| BIOS Type | ▪ 16Mb Flash EEPROM with Phoenix BIOS® |
| BIOS Features | <ul style="list-style-type: none"> ▪ Plug and Play (PnP) ▪ DMI 2.3 support ▪ PCI 2.2 ▪ ACPI 1.0/2.0 ▪ USB Keyboard support ▪ SMBIOS 2.3 |
| Management | |
| Software | <ul style="list-style-type: none"> ▪ IPMI (Intelligent Platform Management Interface) 1.5 / 2.0 ▪ SuperDoctor® III ▪ Watch Dog ▪ NMI ▪ W83793 H/W Monitor |
| Power Configurations | <ul style="list-style-type: none"> ▪ ACPI/APM Power Management ▪ Main Switch Override Mechanism ▪ Wake-On-Ring (WOR) header ▪ Wake-On-LAN (WOL) header ▪ Keyboard Wakeup from Soft-Off ▪ Power-on mode control for AC power loss recovery ▪ Internal / External Modem Rignon |
| PC Health Monitoring | |
| CPU | <ul style="list-style-type: none"> ▪ Monitors for CPU Cores +1.8V, +3.3V, +5V, ±12V, 3.3V Standby, 5V Standby, VBAT ▪ CPU 4Phase-switching voltage regulator with auto-sense from 0.8375V-1.6000V ▪ Adjustable CPU clock frequency ratio (Only available if CPU is supported) |
| FAN | <ul style="list-style-type: none"> ▪ Total of six 4-pin fan headers ▪ 6 fans with tachometer monitoring ▪ Status monitor with firmware speed control ▪ Low noise fan speed control ▪ Status monitor for on/off control ▪ Support 3-pin fans (without speed control) ▪ Pulse Width Modulated (PWM) fan connector |
| Temperature | <ul style="list-style-type: none"> ▪ Monitoring for CPU and chassis environment ▪ CPU thermal trip support ▪ Thermal Monitor 2 (TM2) support ▪ PECI |
| LED | <ul style="list-style-type: none"> ▪ CPU / System Overheat LED ▪ Standby Power alert LED |
| Other Features | <ul style="list-style-type: none"> ▪ Chassis Intrusion Detection ▪ Chassis Intrusion Header |
| Operating Environment / Compliance | |
| RoHS | <ul style="list-style-type: none"> ▪ RoHS Compliant 6/6, Pb Free |
| Environmental Spec. | <ul style="list-style-type: none"> ▪ Operating Temperature: 10°to 35°C (50°to 95°F) ▪ Non-operating Temperature:-40°to 70° C (-40°to 158°F) ▪ Operating Relative Humidity: 8% to 90% (non-condensing) ▪ Non-operating Relative Humidity: 5 to 95% (non-condensing) |
| OS Compatibility | |
| • Please see our OS Compatibility Chart . | |

Note: For optimized or compatible chassis, additional parts may be required, please check with Supermicro sales rep

Parts List

| Standard Retail Package | | | |
|-------------------------|-------------|-----|------------------------------|
| | Part Number | Qty | Description |
| X7SBA | MBD-X7SBA-O | 1 | X7SBA Motherboard |
| Manual(s) | MNL-0976 | 1 | Motherboard Manual for X7SBA |
| I/O Cables | CBL-0022L | 1 | ATX Floppy Cable |
| | CBL-0044L | 6 | SATA Cable (2Ft.) |
| Driver Disk | CDRX7-UP | 1 | Version 1.00 (or newer) CD |
| I/O Shield | CSEPT07L | 1 | I/O Shield for X7SBA |

Note: Items in a Standard Retail Package may differ from items in a Standard Bulk Package.