


BFS30 Series

30 WATT UNREGULATED POWER SUPPLY

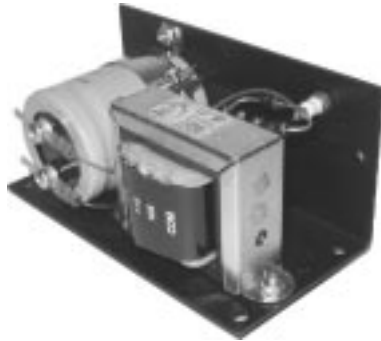

Features

- Open frame
- Fully isolated output
- Input/output isolation: 1500VAC

Elpac Model	Vdc	Amps	Watts (max)	No Load (V)	Full Load (V)
BFS30-12	12	2.4	30	16.8	12.25
BFS30-20	20	1.5	30	26.5	19.9
BFS30-24	24	1.2	30	35.8	26.7
BFS30-48	48	0.6	30	63.1	48

Specifications

Input

- Voltage: 105/115/125 VAC
- Frequency: 47 – 440 Hz

Output

- Unregulated: $\pm 10\%$ full load
- Ripple/noise: $\pm 3\%$ RMS, DC to 50MHz

Environmental

- Operating temperature: 0°C to 40°C
- Storage temperature: -55°C to 85°C

Mechanical

- Size: 5.9 x 2.7 x 3.0 inches



ELPAC POWER SYSTEMS

1562 Reynolds Ave • Irvine CA, 92614
Phone: (949) 476-6070 Fax: (949) 476-6075
Toll free: (888) ELPAC80
E-mail: sales@elpac.com or engr@elpac.com

www.elpac.com