


AR-B1893

6.45" X 8.50"

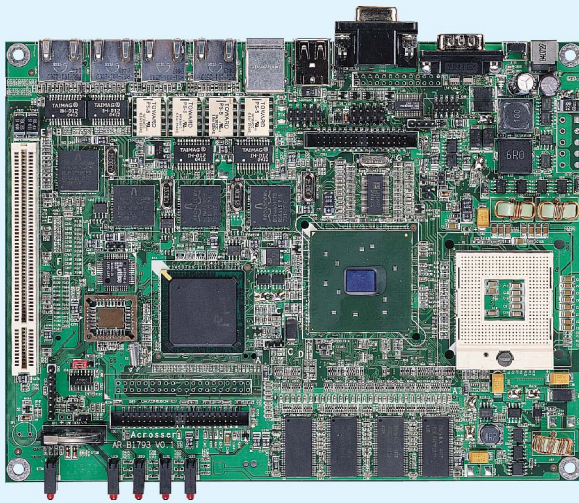

Features

Pentium M, VGA, 10/100/1000 LAN, CF+ Type II, PCI Slot, Mini-PCI Slot, 2 Serial Ports, 4 USB 2.0 Ports

Pentium M >

PXE(Net booting) >

Console Redirection >

4 LANs >

CF +Type II >

DDR RAM >

Auto-MDIX >

Mini-PCI >

4 USB 2.0 >

By-passed LAN (Option) >

Xfire.acrosser.com.tw

Network Security-Firewall/VPN

Specification

System:

CPU	Supports Pentium-M CPUs with 1.3GHz
Chipset	Intel 852GM + Intel ICH4 chipset (82801DB) I/O Controller
System Memory	128MB on-board & one SODIMM Slot for up to 1.26GB memory
On Board Cache	256K
BIOS	AWARD
SSD	1 (Compact Flash Type II)
Expansion Interface	1 (32-bit PCI Expansion Slot)
Battery	Lithium 3V/220mAH
Power Requirement	+12V Input; 50W AC power Adapter, Input range 115V AC 60GHz ~ 230V AC 50Hz
Watchdog Timer	Software programmable 1~63 seconds
Dimension	187mm x137mm (7.35" x5.43")
Operating Temperature	0~60°C(32~140°F)
Storage Temperature	-20~80°C(-4~176°F)
Operating Humidity	0% ~ 90% Relative humidity non-condensing

I/O:

Ethernet	10/100/1000 Mbps LAN Broadcom x 2 (BCM-4410, 10/100Mbps), RJ-45 with built-in LED x4
USB	4 (USB 2.0) (2 external (rear I/O panel), 2 internal (pin-headers))
Serial Port	1 x RS232 external connector, 1 x RS232/422/485 with pin-header
Parallel Port	On-board 25-pin headers for LPT1, supports SPP/EPP/ECP modes (rear I/O panel) pin-headers
VGA Interface	CRT 15-pin female connector
Interface	1 (3.3V Mini PCI connector, Internal)
PS/2	Mouse x 1, Keyboard x 1
GPIO	8 Independent I/O Lines, TTL level
IDE	One on-board 2.00mm 44 pin-header, One on-board 2.54mm 40 pin-header Supports Ultra DMA 33/66/100/133

Management:

Indicator	1x Power LED, 1x Hard drive LED, 8 LEDs for Network connect as ACT and Link
-----------	---

Packing list:

Utility CD, Manual

Ordering Information

Standard:

AR-B1893	Pentium M, VGA, 10/100/1000 LAN, CF+ Type II, PCI Slot, Mini-PCI Slot, 2 Serial Ports, 4 USB 2.0 Ports
----------	--

Option:

190030370	HDD Cable
190030158-01	VGA Cable
190030195	Keyboard/Mouse Cable

Specifications are subject to change without notice.