


AR-B1665

PIII All-In-One EBX

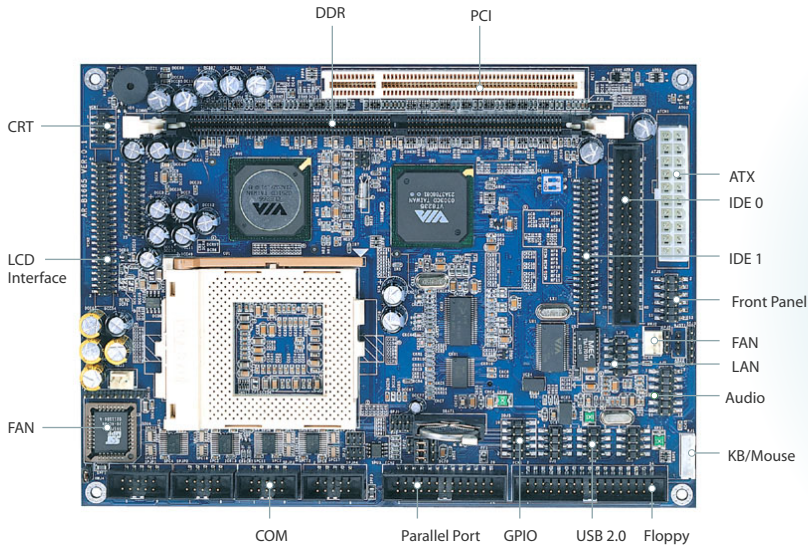

Features:

- Socket **370**
- EBX**
- DDR**
- 6 USB 2.0**
- LAN**
- 4 COM**
- Audio**
- LCD**
- Simultaneous Display**
- AGP 8x**
- Mini PCI**

Pentium III All -In-One EBX with Audio, LAN, VGA/LCD, Mini-PCI, 6 USB 2.0, 4 COMs

System

CPU	Supports Intel Celeron/Pentium III up to 1.26G, VIA C3 processors FSB 66/100/133MHz
Chipset	VIA CLE266E (VT8623+VT8235)
System Memory	Supports DDR 200/266 (PC1600/2100) SDRAM On-board one 184-pin DIMM socket for up to 1GB memory maximum
On Board Cache	
BIOS	Award
SSD	
Watchdog Timer	Software programmable 1~60 seconds
Expansion Interface	One 32-bit PCI slot One 32-bit Mini-PCI slot
Battery	Lithium 3V/220m AH
Power Consumption	+3.3V, +5V, +12V, +5VSBY
RTC	On Chipset, supports ACPI function
Dimension	203 mm X 146 mm (8" x 5.75")
Operating Temperature	0~60°C(32~140°F)
Storage Temperature	-20~80°C(-4~176°F)
Operating Humidity	0% ~ 90% Relative humidity non-condensing

I/O

Main IO	2xE-IDE (Ultra DMA 33/66/100/133, 40 pin/ 44 pin), 1xFDD, 2xPS/2 (KB/Mouse), 2xRS232, 1xRS-232C (Share with Touch Screen), 1xRS-232/485, 1xLPT
IrDA	Yes (Share with COM port)
Ethernet	Integrated VIA VT8235, 10/100Mbps Base-T, RJ45x1
Audio	VT1616, AC97 2.0 compliant Mic in, Line in, Line out , CD-in
USB	6 (USB 2.0 compliant)
GPIO	One TTL 8-bit input and output
SCSI	

Display

Chipset	Integrated AGP 8x Graphics Core, 128-bit 2D/3D Graphics Engine, H/W MPEG-2/1 Decoder
Memory Size	Shared system memory up to 64MB
Resolution	Up to 1920 X 1440 (CRT) and 1600 X 1200 (LCD)
Interface	CRT 2X5x2.00mm pin-header connector LCD interface with 2X22X2mm pin header (24-bit TTL TFT LCD)
TV-out	
Dual Display	Simultaneous View Capability where CRT and Flat Panel Monitor can have a different resolution and refresh rate

Packing List

Part No.	Utility CD, Manual
-----------------	--------------------

Ordering Information

Standard

AR-B1665	Pentium III All -In-One EBX with Audio, LAN, VGA/LCD, Mini-PCI, 6 USB 2.0, 4COMs
-----------------	--

Optional

190040002	Cables Pack (IDE, FDD, Serial Port)
010080343	AR-B9432A LVDS Connector
010010208	AR-B9462B Compact Flash II Board

Specifications are subject to change without notice.

