

Open Frame LCD

Open Frame LCD

10.4"

Specifications

Model Name	R10T200-OFU1
Viewable Size Image	10.4"
Active Display Area(mm)	211.2(H)x158.4(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)(typ.)
Number of Pixels	800x600
Contrast Ratio	250:1(typ.)
Display Color	262,144(6bit/colors)
Brightness(cd/m ²)	220
Viewing Angle(CR>=10)	-45~45(H);-35~15(V)(typ.)
Synchronization Range	35.1~48.1KHz/56~75Hz
Horizontal/Vertical	
Recommended Resolution	800x600@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive


Remarks:R10T200 series= VGAinput only

R10T230 series= VGA+VideoInput

*Optional Touch Screen requires different mechanical design.



Mechanical Drawing

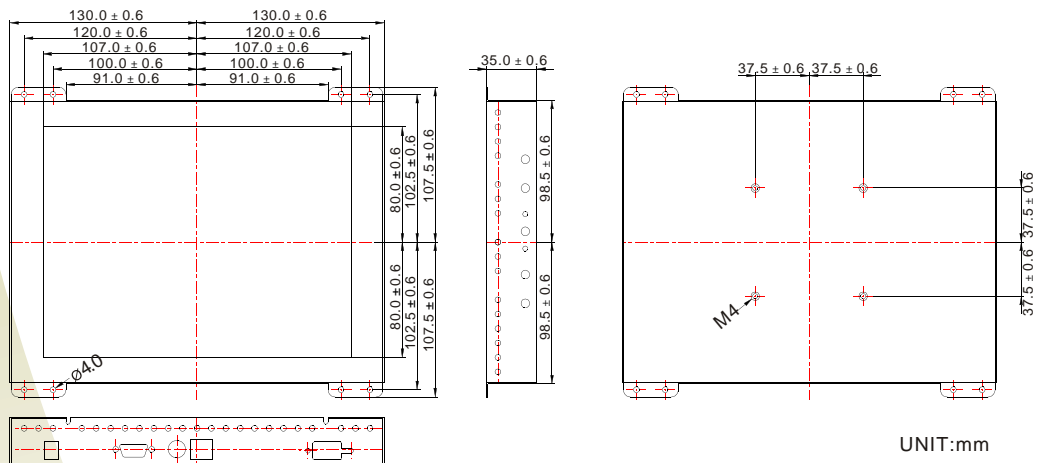

WINMATE COMMUNICATION INC.

Winmate Taiwan
9F, No. 111-6, Shing-De Rd.,
San-Chung City,
Taipei 241, Taiwan, R.O.C.

TEL:+886-2-6635-5758
FAX:+886-2-6635-5859
http://www.winmate.com.tw
Email:sales@winmate.com.tw