


LCD

4 COMS

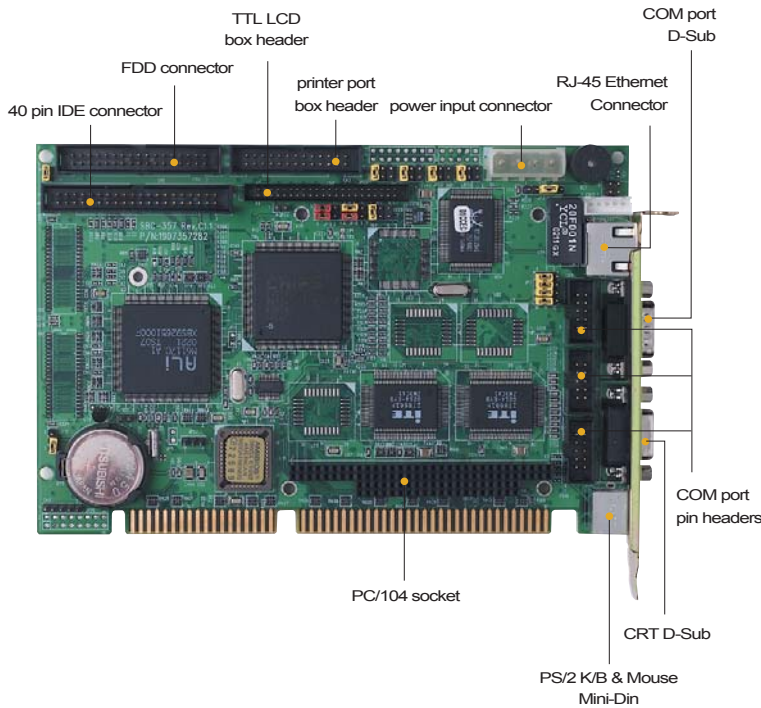

## Features

- Onboard ALi M6117C, Intel® 386SX-40 compatible CPU
- Four COM ports
- C&T 65545 LCD controller with 1MB display memory
- 10/100Base-T Fast Ethernet
- Supports DiskOnChip® up to 1GB
- PC/104 expansion socket
- Onboard 4MB or 8MB EDO RAM
- Onboard 1.5MB Flash Disk
- Onboard 128KB S-RAM (optional)
- ISA interface

## Specifications

### System

- CPU: ALi M6117C, Intel® 80386SX-40 compatible
- System Memory: Onboard 4MB/8MB EDO RAM
- Chipset: ALi M6117C
- I/O Chipset: ITE8661F
- BIOS: AMI 128KB FLASH ROM
- SSD: Supports DiskOnChip up to 1GB
- Watchdog Timer: Generate a system reset, IRQ15 or NMI
- Expansion Interface: ISA interface, PC/104 socket x 1
- Battery: Lithium battery
- Power supply voltage: +5V (4.75V to 5.25V), AT
- Board Size: 7.3" (L) X 4.8" (W) (185 mm X 122 mm)
- Gross Weight: 0.66lb. (0.3kg)
- Operating temperature: 32°F to 140°F (0°C to 60°C)

### I/O

- MIO: IDE x 1, FDD x 1, KB+Mouse x 1, RS-232 x 3, RS-232/422/485 x 1, Parallel x 1

### Display

- Chip: C & T 65545
- Memory Size: Onboard 1 MB SDRAM
- Resolution: 800 x 600@ 256 colors
- LCD Interface: 24-bit TFT/DSTN/MONO LCD panel

## Packing List

- IDE cable, FDD cable, Serial Port cable (x2) 9657456000
- Serial Port cable 1701100300
- KB/Mouse cable 1700060191
- Quick Installation Guide
- Utility CD