




Motherboards

Intel® Pentium® M-Based

Socket 479 Intel® Celeron® M Mini-ITX Motherboard w/ Intel® 910GML/915GME Chipset

- 1 Motherboards
- 2 Disk-Size SBOS
- 3 CPU Modules
- 4 PC/I/O Plus
- 5 CPU Card
- 6 Embedded Systems
- 7 Network Security Appliance

MI920

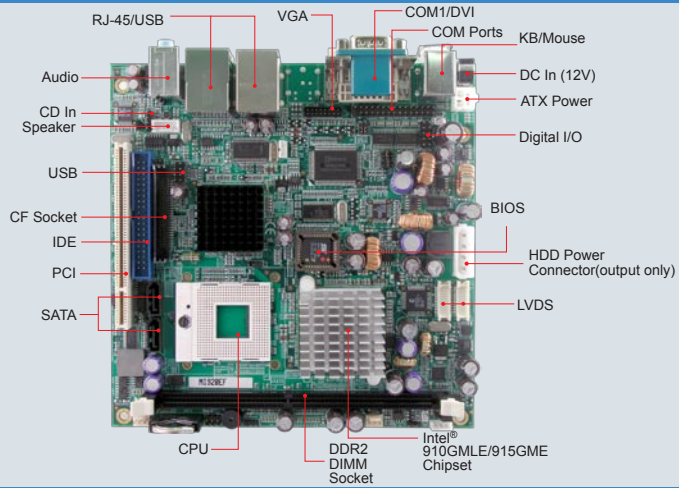

Features

- Supports Socket 479 or Intel® Celeron® M 600MHz / 1GHz, 400/533MHz FSB
- 1x DDR2 DIMM, Max. 1GB
- Supports CRT, DVI and LVDS (w/ dual display)
- 10/100BaseT LAN, optional PCI-E Gigabit LAN
- 2x SATA, 6x USB 2.0, 4x COM
- Watchdog timer, Digital I/O
- 1x PCI, 1x Mini PCI-E socket

System

CPU	Socket 479 for Intel® Pentium® M / Celeron® M or onboard Intel® Celeron® M (600MHz w/ 512KB cache or 1GHz w/ no L2 cache)
System Memory	1x DDR2 DIMM, Max. 1GB
System Chipset	Intel® 910GML (400MHz FSB) / 915GME (533MHz FSB) + ICH6M
BIOS	Award
Watchdog Timer	256 levels
SSD	CF Socket (vertical)
H/W Monitor	Yes
Expansion Slots	1x PCI, 1x Mini PCI-E

Graphics

VGA Controller	Intel® Graphics Media Accelerator (GMA) 900, supports CRT
VGA Memory	Supports DVMT 3.0; Max. shared memory - 384MB
LCD and DVI	Built-in Chrontel CH7307 for DVI; Chrontel CH7308 for 18/24-bit single/dual channel LVDS

LAN

Controller	Intel® ICH6M 10/100Mbps for LAN1 Optional Marvell 88E8053 PCI-E Gigabit LAN for LAN2
Connector	RJ-45 on board

Multi I/O

I/O Chipset	Winbond W83627EHG & Fintek F81216
USB	1x IDE, 1x KB, 1x mouse, 4x RS-232, 2x SATA
Audio	4 ports on board, 2 ports via pin header
Audio	Built-in audio + AC97 codec (ALC655)
Others	Digital I/O (4-in/4-out), +12V DC-in power input

Mechanical and Environmental

Dimensions	170mm x 170mm (6.7" x 6.7")
Max. Power Requirement	Intel® Celeron® M 1.0GHz w/ 512MB DDR2-667 +12V: 1.92A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

MI920EL-C6K	Intel® Celeron® M, 600MHz, 910GML, Mini-ITX M/B with VGA, DVI and 10/100 LAN
MI920EF	Socket 479, 915GME, Mini-ITX M/B with VGA, DVI, LVDS, Mini PCI-E, 10/100 LAN and PCI-E Gigabit LAN
CMI100-920C	Chassis for MI920 Mini-ITX, w/ 60W power adaptor, 2.5" HDD holder
CMI110-920C	Chassis for MI920 Mini-ITX, w/ 60W power adaptor, 2.5" HDD holder



- Remarks:
1. For optional daughter boards and riser cards, please refer to page 19-20.
 2. Specifications are subject to change without prior notice.