

ICE-9152 / 9102

COM Express Basic Type 2 Module, Socket 479 Intel® Pentium® M / Celeron® M CPU, VGA/LVDS, LAN, CF, SATA, USB 2.0 and Audio




Features

1. COM Express Type 2 Basic Module
2. Support 1x PCIe x16, 4 x PCIe x1, 4 x PCI slots for expansion
3. Support dual display for VGA + LVDS
4. Support 6 x USB 2.0, 2 x SATA, 1 x IDE

Specifications

- ◆ CPU
Socket 479 Intel® Pentium® M, Celeron® M processor with a 533/400 MHz FSB on board
Intel® Celeron® M 1GHz zero cache or 1 GHz 512KB cache processor
- ◆ System Chipset
Intel® 915GME + ICH6M (ICE-9152)
Intel® 910GME + ICH6-M (ICE-9102)
- ◆ BIOS
AMI Flash BIOS
- ◆ System Memory
One 200-pin 533/400MHz DDR2 SO-DIMM support up to 2GB (ICE-9152)
One 200-pin 400MHz DDR2 SO-DIMM support up to 2GB (ICE-9102)
- ◆ Ethernet
One Intel® 82541PI GbE Chipset
- ◆ I/O Interface
8 x USB 2.0 (to Base Board)
2 x SATA (to Base Board)
1 x IDE channel (to Base Board)
- ◆ Expansions
1 x PCIe x16 signal to Base Board (ICE-9152)
4 x PCIe x1 signal to Base Board
4 x PCI, 32 bit / 33 MHz PCI bus to Base Board
- ◆ Display Interface
VGA Integrated in Intel® 915GME/910GME Signal (to Base Board)
18/24-bit dual channel LVDS Signal (to Base Board)
- ◆ Watchdog Timer
Software programmable supports 1 ~255 sec. System reset (Depend on Super I/O of Base Board)
- ◆ Power Supply
ATX / AT supported
- ◆ Power Consumption
12V@1.33A (Intel® Celeron® M 373 1G/512 L2 cache, DDR2 1GB/ 533MHz)
- ◆ Temperature:
Operation: 0°C ~ 60°C (32°F ~ 140°F)
- ◆ Humidity: Operation: 5% ~95 non-condensing
- ◆ Dimensions: 125 mm x 95 mm

Dimensions (mm)

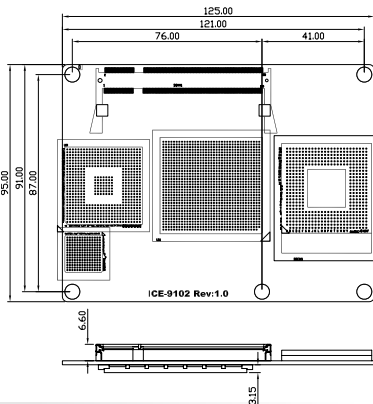

Packing List


1 x ICE-915/9102 Single board computer	
1 x Heatspreader	
1 x Heatsink (ICE-9102)	
1 x Cooler (ICE-9152)	
1 x Utility CD	1 x QIG

Ordering Information

Part No.	Description
ICE-9152-R10	COM Express Socket 479 Intel® Pentium® M / Celeron® M CPU with VGA/LVDS, GbE, USB 2.0, SATA and Audio
ICE-9102-1GZ-R10	COM Express ULV Intel® Celeron® 1GHz zero cache CPU with VGA/LVDS, GbE, USB 2.0, SATA and Audio
ICE-9102-1G512-R10	COM Express ULV Intel® Celeron® 1GHz 512K cache CPU with VGA/LVDS, GbE, USB 2.0, SATA and Audio
ICE-DB-9S-R10	Base Board for COM Express Type 2 modules

ICE-DB-9S

Base Board for COM Express Type 2 Module

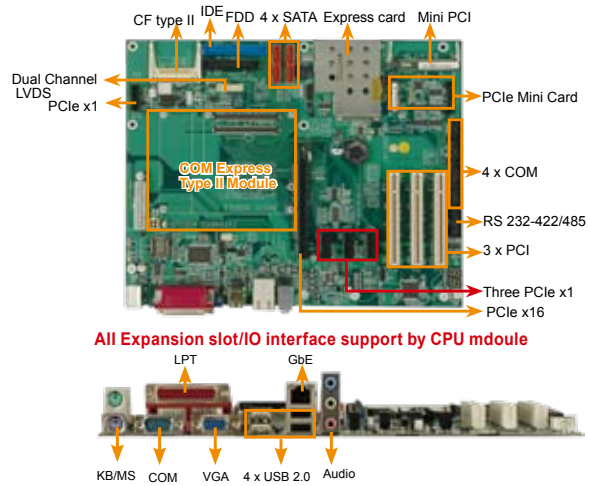

All Expansion slot/I/O interface support by CPU module


Features

1. ATX Form factor Base board for COM Express type 2 Module
2. Support 1x PCIe x16/4x PCIe x1, 3 x PCI for expansions
3. Second I/O support up to 6 x COM Ports
4. COM2 /COM3 with 5V/12V power by jumper selection

Specifications

- ◆ CPU Module Interface
Supports COM Express Compact / Basic module using connector pin out Type 2
- ◆ Display Interface
VGA DB15 connector
18/24-bit dual channel LVDS
TV-out interface
- ◆ Expansions
1 x PCIe x16
4 x PCIe x1
3 x PCI, 32 bit / 33 MHz PCI bus
1 x PCIe Mini card
1 x Express Card
1 x Mini PCI
- ◆ I/O Interface
4 x SATA/SATA II
1 x IDE
1 x CF type II
5 x RS-232 (COM2/COM3 with 5V/12V power)
1 x RS-232/422/485
2 x PS2 KB/MS
6 x USB 2.0
1 x FDD
1 x LPT
- ◆ Audio
Realtek ALC888 for 7.1 channels HD audio
1 x Mic-in, Lin-in, Lin-out connector
1 x Front Audio
- ◆ Ethernet Connector
1 x RJ-45 connector for GbE
- ◆ Super I/O
First Super I/O: Winbond W83627EHG
Seccond Super I/O: Fintek F81216
- ◆ Digital I/O
8-bit digital I/O, 4-bit input/4-bit output by Winbond W83627EHG
8-bit digital I/O, 4-bit input/4-bit output by Fintek F81216
- ◆ Infrared Interface
1 x Infrared interface by pin header
- ◆ Power Supply
ATX / AT support
- ◆ Fan
3 x Fan Connector, Support smart fan for CPU Fan (FAN1)
- ◆ Temperature
Operation: 0°C ~ 60°C (32°F ~ 140°F)
- ◆ Humidity
Operation: 5% ~95 non-condensing
- ◆ Dimensions
304.8 mm x 243.8 mm (12" x 9.6")

Dimensions (mm)

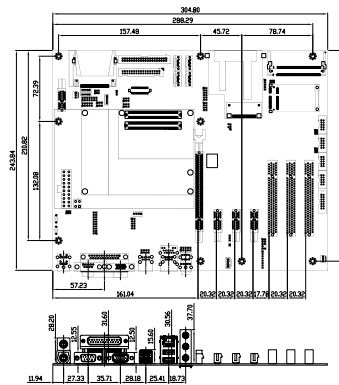

Packing List

1 x COM Express Base Board	2 x SATA Cable (P/N: 32000-062800-RS)
1 x Dual Ports RS-232 Cable (P/N: 19800-000051-RS)	1 x Mini Jumper Pack
1 x Utility CD	1 x QIG

Ordering Information

Part No.	Description	Part No.	Description
ICE-DB-9S-R10	Base board for COM Express Type II Modules	32200-000052-RS	40-pin 3.5" IDE cable
19800-000082-RS	RS-232/422/485 cable	32200-000017-RS	FDD cable
32100-088600-RS	SATA Power cable	19800-000049-RS	LPT cable

1
Industrial Computing Solutions

2
Embedded Computing Solutions

3
RISC-Based Embedded Solutions

4
Industrial Data Collector/Server Solutions

5
Video Capture Solutions

6
I/O Communication Solutions

7
Panel Solutions

8
Power Supply/Network/Communication/Peripherals