


BPC-5019

19" High Speed Panel PC with Touch Screen, MainBoard, 180W ATX P/S,
1 x Expansion slot

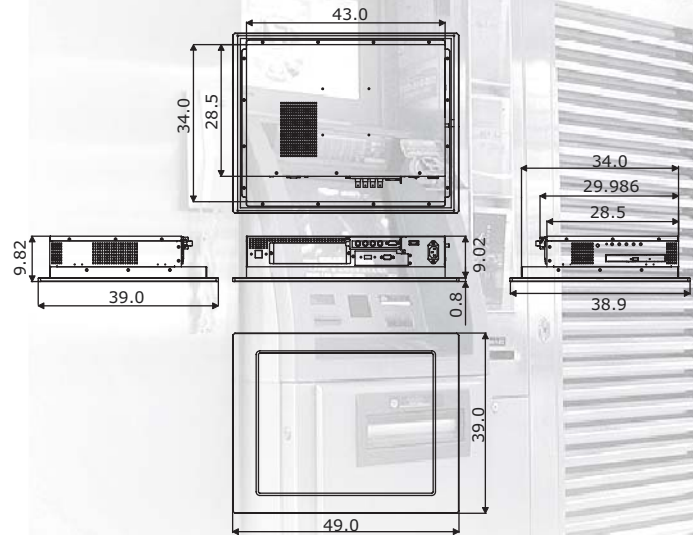

Features

- Aluminum front panel design
- 19" TFT color panel display
- Built-in OSD key, touch screen, 180W ATX P/S
- BPC-5019-C w/HS-1752, provides Intel® P-M/C-M processor, 6 x COM, 6 x USB2.0
- BPC-5019-Q w/HS-1750, provides Intel® Core™ Duo processor, 4 x COM, 6 x USB2.0, DVI display, PCI expansion slot
- Onboard graphics, dual GB ethernet, audio controller
- 1 x 2.5" HDD space, 1 x slim CD-ROM space
- 3 x 4cm ball bearing cooling fan
- Option for Wireless LAN module

Display

- LCD Size**
19"
- Max Resolution**
1280 x 1024 pixels
- Brightness (cd/m²)**
300 (center, Typ) @ 7.5mA
- Contrast Ratio**
800:1
- LCD Color**
16.7M colors
- Pixel Pitch (mm)**
0.294 x 0.294
- OSD**
Provides OSD function
- Touch Screen**
19" resistive

Mechanical

- Thermal System**
3 x 4cm ball bearing cooling fan
- Dimensions (LxHxW)**
49.0 x 39.0 x 9.82 cm
- Cut Out Size (LxH)**
43.4 x 34.4 cm
- Operation/Storage Temperature**
0~+45 degrees C/-20~+70 degrees C
- EMC**
FCC/CE
- Front Panel Protection**
IP65 compliance
- Power Supply**
100~240V AC in 180W ATX power supply

Ordering Guide


- BPC-5019-C**
19" Panel PC w/TFT Panel, Touch Screen, HS-1752, 180W ATX P/S
- BPC-5019-Q91**
19" Panel PC w/TFT Panel, Touch Screen, HS-1750, 180W ATX P/S

- Accessory Options**
Table Top Metal Stand, CPU, Memory Module, Wireless LAN Module, 2.5" HDD, Slim CD-ROM, Riser Card (BPC-5017-Q only)

System

BPC-5019-C

- SBC Model**
HS-1752
- CPU**
Intel® Pentium® M/Celeron® M processor in the u-FCPGA 478 package (option)
- BIOS**
Award BIOS with 4Mb SPI Flash EEPROM
- System Chipset**
Intel® 915GME/ICH6-M
- System Memory**
2 x 240-pin DIMM socket up to 2GB DDR2 SDRAM
- Display Chipset**
Intel® 915GME
- Audio Chipset**
RealTek ALC655 5.1CH audio codec
- Ethernet Chipset**
Dual RealTek RTL8111B 10/100/1000 Mbps LAN
Provides Wireless LAN module (option)
- Drive Bay**
1 x 2.5" HDD space
1 x Slim CD-ROM space
- Watchdog Timer**
Reset: 1 sec.~255 min. and 1 sec. or 1 min./step
- External I/O**
6 x USB2.0, 6 x COM, VGA, 2 x LAN, PS/2 KB/MS, MIC In, Line In, Line Out, AD Board VGA
- Rear I/O**

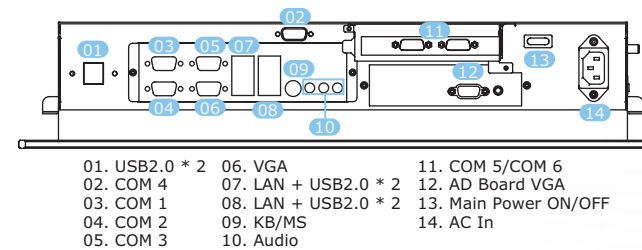

BPC-5019-Q

- SBC Model**
HS-1750
- CPU**
Intel® Core™ Duo T2050 processor (option)
- BIOS**
Award BIOS with 4Mb Flash EEPROM
- System Chipset**
Intel® 945GME/ICH7-M
- System Memory**
2 x 200-pin SO-DIMM socket up to 4GB DDR2 SDRAM
- Display Chipset**
CRT: Intel® 945GME
DVI: Chronitel CH7307
- Audio Chipset**
RealTek ALC655 5.1CH audio codec
- Ethernet Chipset**
Dual Marvell 88E8053 10/100/1000 Mbps LAN
Provides Wireless LAN module (option)
- Drive Bay**
1 x 2.5" HDD space
1 x Slim CD-ROM space
- Watchdog Timer**
Reset: 1 sec.~255 min. and 1 sec. or 1 min./step
- Expansion**
1 x Standard PCI expansion slot
- External I/O**
6 x USB2.0, 4 x COM, PS/2 MS, PS/2 KB, VGA, DVI, 2 x LAN, MIC In, Line In, Line Out, AD Board VGA
- Rear I/O**

