

SMK-590R



1U, 16 PORTS, 19" SLIM INDUSTRIAL MONITOR KEYBOARD



**NEW!!
HOT!!**

17" High Brightness TFT LCD Panel




Applications:

- Space saving control panel
- Rackmount consol
- Cost-effective platform
- Network server management

Features:

- Meets EIA 310c & IEC-3 specifications
- One set built-in keyboard, touch pad & monitor
- Heavy-duty steel
- With high brightness TFT LCD Panel
- Anti-glare tempered glass for added protection to the LCD screen
- Membrane keyboard in 105 keys, with touch pad
- Built-in rail self-locking device
- Safety approval: CE, FCC

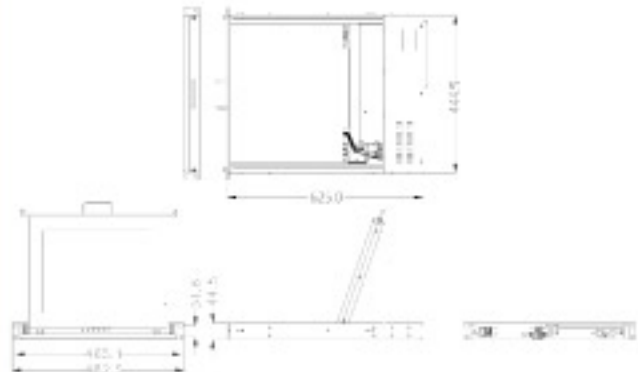

SMK-590R



1U, 16 PORTS, 19" SLIM INDUSTRIAL MONITOR KEYBOARD

Specifications ■ ■

Dimension	17.42" x 1.75" x 24.61" (W x H x D) (442.4mm x 44.5mm x 625.0mm)
Color	Black
Weight	17.5kgs (38.5lbs)
Folding Angle	Up to 110°
Chassis	Heavy duty metal
Keyboard	Membrane 105 key with touchpad
Keyboard Language	US, UK, Chinese*
A/D Board	CB7301
Power Supply	1U, AC 100/240V, 50W (auto sensing switch)
Extension Length	Up to 35.4" (900mm)
Max. Railing Length	17" (431.8mm)
Protection	Tempered glass
Security Lock	Thumb screw x 2
Operation Temperature	0 - 50°C (32 - 122°F)

Display ■ ■

Diagonal	17" (15" is available in custom order)
Resolution	1280 x 1024
Display Area	337.92 x 270.34
Contrast Ratio	400:1
Frame Rate	60Hz (typ), 75Hz (Max)

KVM Switch ■ ■

KVM Switch Port	16
Operating System	DOS, Win3.X, Win 95/98/98SE/2000/ME/XP, WinNT, Netware, SCO Unix, HP Unix, Linux
Hot Plug	Add PCs or Remove Connected PCs for Maintenance without powering down the KVM switch or PCs
Video Quality	Up to 1920 x 1440 with 200 MHz bandwidth
Auto Scan Mode	5s - 99s
USB-PS2	USB to PS2 for converting KVM PS2 port to USB PC, MAC or USB SUN Microsystems (optional)

Accessories ■ ■

Extension Bracket	2
Power Cord	1
D-Sub 15 VGA-PS/2 Cable (3-in-1)	16
Screw Package	1

* Other languages are available upon request.

