


AR-B1662 · AR-B1662G

5.25"

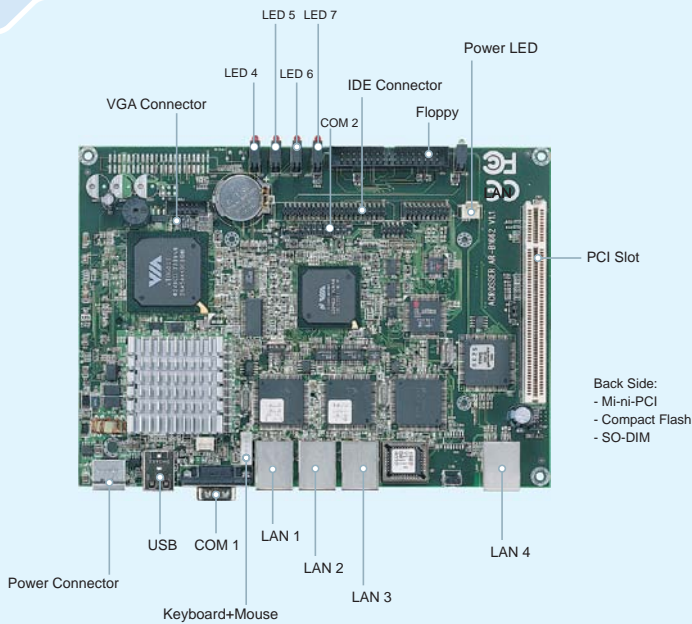

Features

Internet Security EPC with VIA Eden /C3 CPU, 4 LANs, Compact Flash, PCI slot, Mini-PCI, USB

VIA

2 USB

4 LANs

2 COM

CF

Mini PCI

Xfire.acrosser.com.tw

Specification

System:

CPU	On-board VIA C3 1GHz for AR-B 1662G with Fan, Eden 600MHz for AR-B1662 with Fanless
Chipset	VIA PLE133T+VT82C686B
System Memory	One SO-DIMM socket, supports up to 512MB memory maximum
BIOS	AMI
SSD	One Compact Flash Type I socket
Watchdog Timer	Software programmable 1~63 seconds
Expansion Interface	One 32-bit PCI Slot . Supports one Mini PCI
Battery	Lithium 3V/220mAh
Power Requirement	+5V @ 3 A, +12V @ 0.5 A
Dimension	203mm x 146 mm (8" x 5.75")
Operating Temperature	0~60°C(32~140°F)
Storage Temperature	-20~80°C(-4~176°F)
Operating Humidity	0% ~ 90% Relative humidity non-condensing

I/O:

Main IO	1xE-IDE, 2xPS/2 (KB/Mouse), 2xRS232C(D-SUB x 1, pin-header x 1)
Ethernet	NS 83816 x 4 , 10/100Mbps Base-T, RJ45 connector
	2 (USB 1.1 compliant)
GPIO	One TTL 8-bit input and output

Packing list:

190030158-01	VGA Cable
190030195	Keyboard+Mouse Cable
190030213	2.5"HDD Cable
190030379	COM Cable
	Utility CD, Manual

Ordering Information

Standard:

AR-B1662	Internet Security EPC with VIA Eden 600MHz CPU, 4LANs, Compact Flash, PCI slot, Mini-PCI, USB
AR-B1662G	Internet Security EPC with VIA C3 1GHz CPU, 4LANs, Compact Flash, PCI slot, Mini-PCI, USB

Option:

150010045	Power 27W AC100V/240V (PW-027A-2YB1)
190030213	AC Power Cord (European Type)
190030213	AC Power Cord (American Type)
190030213	AC Power Cord (UK Type)
190030213	AC Power Cord (Australian Type)

Specifications are subject to change without notice.