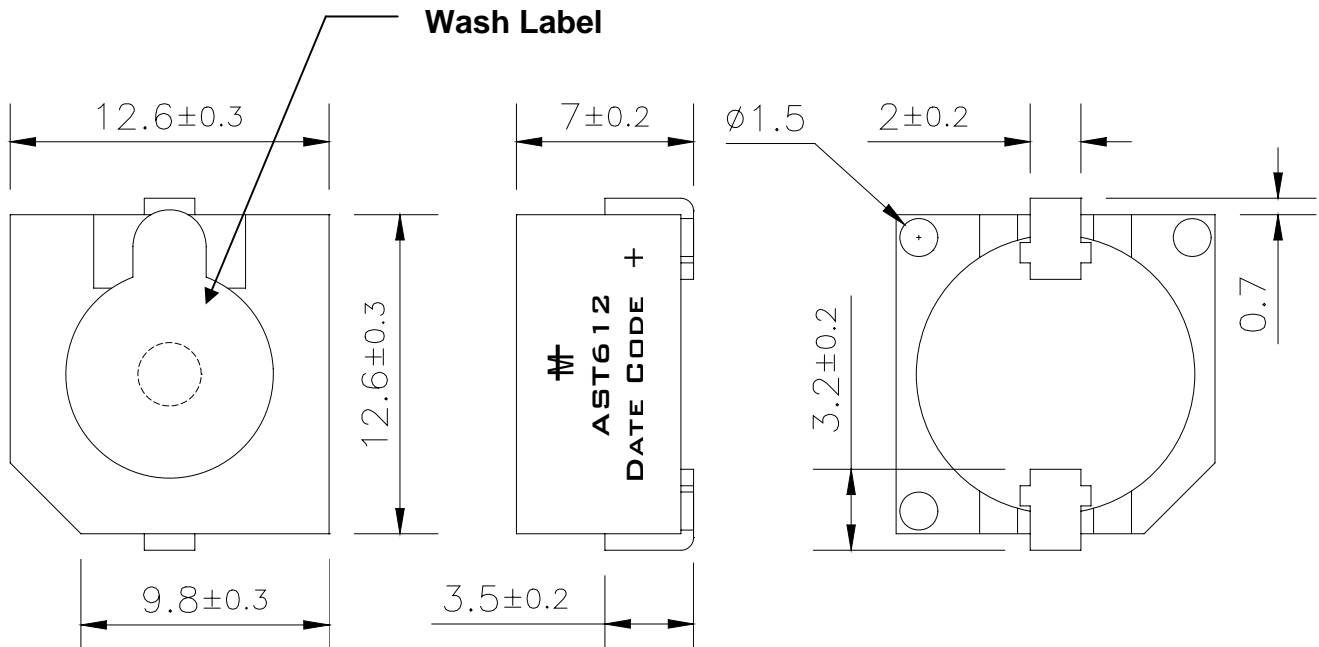


**Specifications:**

Resonant Frequency (Hz)	2400
Operating Voltage (Vp-p)	8.0 ~ 16
Rated Voltage (Vp-p)	12
Current Consumption Max. (mA)	50 at Rated Voltage
Sound Pressure Level Min. (dB)	87 at 10cm at Rated Voltage
Coil Resistance ( $\Omega$ )	$140 \pm 14$
Operating Temperature ( $^{\circ}\text{C}$ )	$-20 \sim +70$
Storage Temperature ( $^{\circ}\text{C}$ )	$-30 \sim +80$
Housing	PPO plastic resin (Color: Gray)
Type of Connection Terminals	SMD
Weight (Grams)	2.6
Options	For other options contact factory

PS: Vp-p = 1/2duty, square wave

**Dimensions:** (units: mm)**Packaging:**

Parts are supplied in tubes (50 qty per tube)