


➤ MOPSlcdLX



500 MHz @ 0.9W
AMD processor

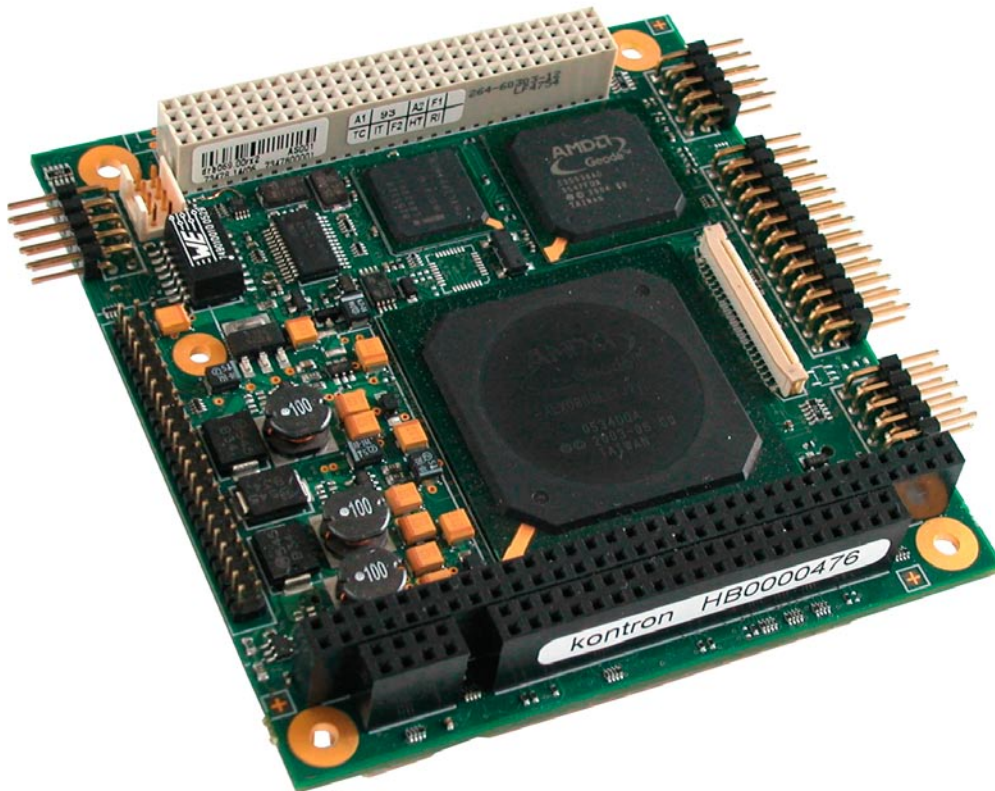

- Extreme low power fanless PC/104plus, 500MHz AMD LX800
- With onchip Graphics VRAM for high speed LCD/CRT
- PC/104plus card for ISA and PCI IO card expansion
- ROHS compliant
- FULL Featured embedded SBC (USB, COM, LAN, ect)

Product Overview

The MOPSlcdLX (Minimized Open PC System) with its 500 MHz AMD LX800™ processor offers high reliability and performance at low power consumption – only passive cooling if at all – no moving parts. The PC/104-Plus (ISA & PCI signals) enables applications with wide choice ISA IO or high PCI I/O performance requirements. The MOPSlcdLX is a high integrated CPU board which includes in addition to the standard interfaces a PCI graphic, a 10/100 MBit Ethernet and 2x USB interfaces. A watchdog timer and a realtime clock are standard. The SO-DIMM socket enables this board to be equipped with up to 1 GByte of DDR-RAM.

The lower socket is used as JILI (LVDS) interface for connecting LCD flatpanels. The on chip Graphics+ Controller supports CRT & TFT. A Kontron chipDISK (IDE compatible flash disk) with capacity up to 512 MByte can be plugged directly onto the 2.5" harddisk interface. All MOPS PC/104 boards are Plug&Work compatible, which considerably reduces the time to market. All MOPS PC/104 provide the same pinout for keyboard, COM1 and COM2, 44pin IDE, 2xUSB, LPT as well as LAN. This is the common MOPS-family feature, which eases the upgradeability enormously within the Kontron MOPS PC/104-products.

Technical Information

Full PC/104plus compliant Industry Standard	Plug'n Play compatible to another MOPS and therefore exchangeable
CPU	AMD LX800™ 500 MHz, fanless
SDRAM	DDR-RAM-SODIMM socket
Graphic	onchip engine with shared VRAM, CRT & JILI Interface
Panel/CRT	yes/yes
10/100 Base T Ethernet	Intel® 551ER
USB	2x USB 2.0, with Legacy support
EIDE Interface	yes
Floppy Interface	yes
Printer Interface	yes
Keyboard/Mouse Controller	yes/yes
RS232C	2x

LANBoot	yes
DarkBoot	yes
Watchdog	yes
Real Time Clock	yes
Dimensions	96x90 mm (3.8 x 3.6")
Power supply	5V only (*)
Temperature	Operation: 0° to 60° C Storage: -10° to 85° C
Max. humidity	Operation: 10% to 90% Storage: 5% to 95% (non condensing)

(*) see manual for details

Ordering Information

Article	Part.-No.	Description
MOPSlcdLX	01036-0000-53-1	AMD LX800 500 MHz, fanless, PC/104 (ISA)
MOPSlcdLX	01036-0000-53-3	AMD LX800 500 MHz, fanless, PC/104plus (ISA & PCI)
		Longevity secured - will be available as lead free RoHS compliant
	common features:	Extreme Low Power AMD LX800 500MHz, on chip Graphic Controller for CRT & LCD (JILI), DDR-RAM-SODIMM socket, 2xRS232C, 2xUSB 2.0, LPT, FDC, IDE and with Intel 551ER 10/100MBit Ethernet

Corporate Offices

Europe, Middle East & Africa

Kontron AG
Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 219
sales@kontron-emea.com

North America

Kontron America Corporate Office
14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
sales@us.kontron.com

Asia Pacific

Kontron Asia Inc.
4F, No. 415, Ti-Ding Blvd.
Sec.2, NeiHu District
Taipei Taiwan 114
Tel.: +886-2-2799-2789
Fax: +886-2-2799-7399
sales@kontron.com.tw

Kontron Embedded Modules

Brunnwiesenstr. 16
94469 Deggendorf
Germany
Tel.: +49 (0)991/ 370 24-100
Fax: +49 (0)991/ 370 24-333
sales-kem@kontron.com