


BBS-3003

High Speed, Fanless PC with CF, 12V DC Adapter

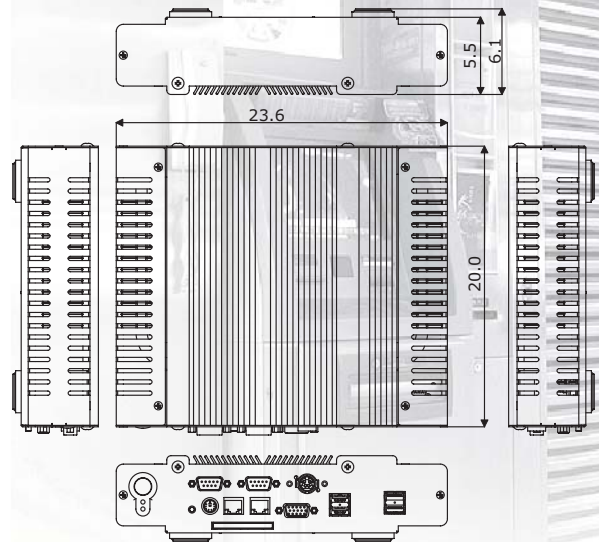

Features

- Heat pipe, fanless PC design
- Built-in HS-2620, 12V DC adapter
- Provides 533MHz FSB Mobile Intel® Celeron® processor 550 2GHz/1M cache (option)
- 1 x 2.5" HDD space
- BBS-3003-E provides CF, 2 x COM, 4 x USB2.0

System

SBC Model

HS-2620

CPU

500MHz FSB Mobile Intel® Celeron® processor 550 2GHz/1M cache (option)

BIOS

Award BIOS with 8Mb SPI ROM

System Chipset

Intel® GME965/ICH8-M

System Memory

1 x 200-pin SO-DIMM socket up to 2GB DDR2 SDRAM

Display Chipset

Intel® GME965 integrated Mobile Intel® GMA X3100

Audio Chipset

RealTek ALC883 7.1CH

Ethernet Chipset

Dual RealTek RTL8111B 10/100/1000 Mbps LAN

Drive Bay

1 x 2.5" HDD space

Storage

1 x Type II CF socket

Watchdog Timer

Reset: 1 sec.~255 min. and 1 sec. or 1 min./step

Mechanical

Dimensions (LxHxW)

23.6 x 6.1 x 20.0 cm

Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

EMC

FCC/CE

Power Adapter


12V DC in 84W adapter

I/O Interface

External I/O

2 x COM, PS/2 KB/MS, 2 x LAN, CF, VGA, 4 x USB2.0

Rear I/O

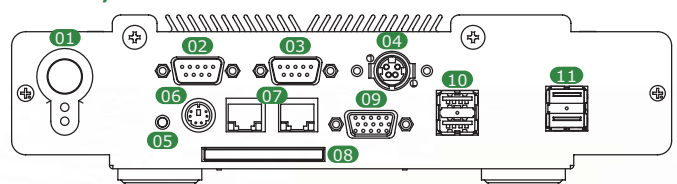

- | | | |
|-----------------------|------------------|----------------|
| 01. Main Power ON/OFF | 05. Reset Button | 09. VGA |
| 02. COM 1 | 06. KB/MS | 10. USB2.0 * 2 |
| 03. COM 2 | 07. LAN * 2 | 11. USB2.0 * 2 |
| 04. DC Adapter In | 08. CF | |

Ordering Guide

BBS-3003-E911

High Speed, Fanless PC with HS-2620(w/CF), 12V DC Adapter

Accessory Options

CF, Memory Module, CF Module, 2.5" HDD