

Features

- High Performance Full-Size CPU Cards And 6-Slot PICMG Bus Passive Backplanes
- Wallmount Or Desktop Applications
- 3.5" x 1 External Drive Bay
- 5.25" x 1 External Drive Bay
- 3.5" x 2 Internal Drive Bay
- Easy-To-Replace Ball Bearing Cooling Fan With Filter x 1 For Card Area
- Card Hold-Down Bar x 1




Specifications

System	
Construction	Heavy-duty Steel
Storage	External: 5.25" Drive Bay x 1 (Front Accessible) 3.5" Drive Bay x 1 (Front Accessible) Internal: 3.5" Drive Bay x 2
System Fan	12cm Ball Bearing Fan with Removable Filter (Flow-in) x 1
Front Panel	Power On/ Off Switch with LED x 1 Reset Button x 1 Hard Disk Drive Active LED x 1 USB x 2
Rear Panel	COM x 1 Parallel x 1 Reserved Cut-out for LVDS Connector x 1
Color	Black
Dimension	7.7" (W) x 15.55" (D) x 8.5" (H) (196mm x 395mm x 216mm)
Carton Size	12.2" (W) x 13.2" (D) x 20" (H) (310mm x 335mm x 510mm)
Net Weight	17 lb (7.8 kg)
Gross Weight	20 lb (9.2 kg)
Environmental	
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)
Storage Temperature	32°F ~ 167°F (0°C ~ 75°C)
Operating Humidity	5 ~ 95%
Storage Humidity	5 ~ 95% @ 40°C, non-condensing
Vibration	1 g rms/ 5 ~ 500 Hz/ random operation
Shock	15 G peak acceleration (11 msec. duration)
EMC	CE/FCC class A

AEC-206

Dimension

Unit: mm

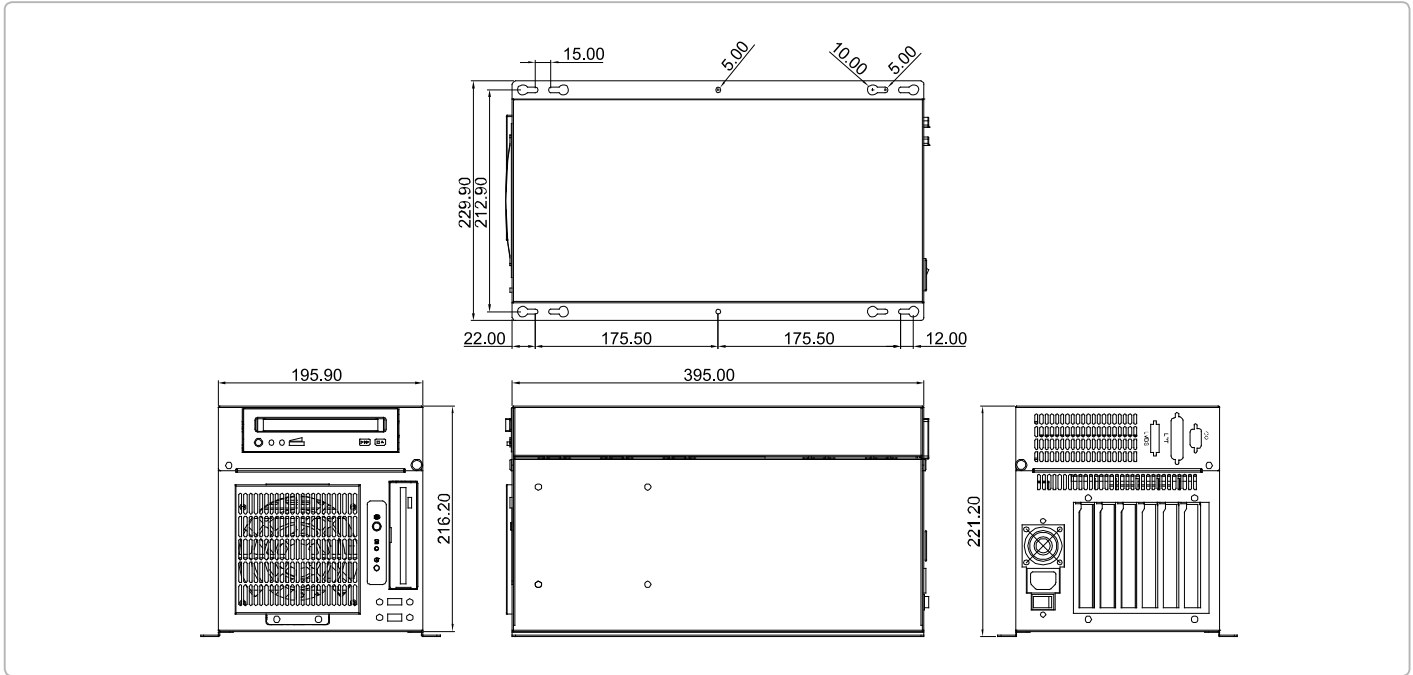

Power Supply Options

P/N	TYPE	PFC Support	Input Voltage	Watt	Size
TF-PW-H150-A-00	ATX	Active PFC	Auto 115-230V	150W	1U (18.5cm)
TF-PW-H300-A-00	ATX	Active PFC	Auto 115-230V	300W	1U (20.5cm)

Passive Backplane Options

P/N	Description	Master Interface	Slots	Power Connector, ATX Extend Function
TF-BP-206SS-P4	Wallmount, PCISA, 6-Slot Backplane, 4 PCI, 3 PCISA, Single Segment, ATX	PCISA	4/1/0 (PCI/ ISA/ APCI)	ATX
TF-BP-206SG-P2	Wallmount, PICMG, 6-Slot Backplane, 2 PCI, 3 ISA, Single Segment, ATX	PICMG	2/3/1 (PCI/ ISA/ PICMG)	ATX, 3-pin ATX extend
TF-BP-206SG-P4	Wallmount, PICMG, 6-Slot Backplane, 4 PCI, 2 ISA, Single Segment, ATX	PICMG	4/2/2 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
TF-BP-206SH-P3	Wallmount, Backplane, PICMG 1.3, 6-Slot, 3 PCI, 2 PCI-E, Single segment, ATX	PICMG 1.3	3/2/1 (PCI/PCI-E/PICMG 1.3)	ATX
TF-BP-206SI	Wallmount, ISA 6-Slot Backplane, 6 ISA, Single segment, AT/ATX	ISA	0/6/0 (PCI/ ISA/ PICMG)	AT/ATX

CPU Cards Options

Model/Name	Description	Master Interface
TF-FSB-G41H	Socket LGA 775, Intel® Core™ 2 Duo/ Core™ 2 Quad (800/1066/1333)	PICMG 1.3
TF-FSB-960H	Socket LGA 775, Intel® Core™ 2 Duo/ Core™ 2 Quad (800/1066/1333)	PICMG 1.3
TF-FSB-860B	Socket 478, Intel® P4/ Celeron® (400/533 MHz)	PICMG
TF-FSB-868G	Socket LGA 775, Intel® P4/ P-D/ Celeron® D/ Core™ 2 Duo (533/800/1066 MHz)	PICMG
TF-FSB-965P	Socket 478, Intel® Core™ 2 Duo (533/667/800 MHz)	PCI
TF-HSB-945P	Onboard Intel® Atom™ N270 1.6 GHz	PCI
TF-HSB-800P	Onboard AMD LX 800 Processor	PCI
TF-HSB-910I	Onboard Intel® Celeron® M (600 MHz)(400 MHz)	ISA
TF-HSB-800I	Onboard AMD LX 800 Processor	ISA
TF-HSB-525I	Onboard Intel® Atom™ D525	ISA

Ordering Information

Model/Name	Description	Remark
TF-AEC-206-B-00	Wallmount, 6-Slot Chassis Bare for 1U Power, PS_SW (AT/ATX), Black	