


## ROBO-8912VG2A

Intel® Core™ 2 Duo processor based PICMG 1.3 SHB with DDR2 SDRAM, VGA, Dual Gigabit Ethernet, Audio and USB

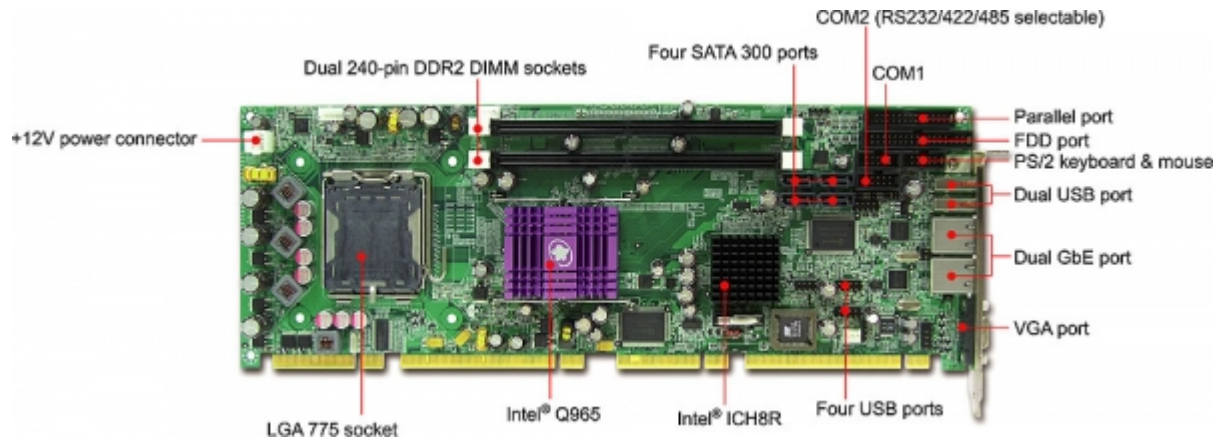

- [Ordering Guide](#)
- [Download](#)
- [Larger Image\(s\)](#)
- [Datasheet \(PDF\)](#)

### FEATURES

- Support Intel® Core 2 Duo processor that only generates up to 65W TDP. Lower TDP than socket 775 Pentium® 4 processor makes the vertical mount slot board more reliability
- Low profile processor improve stability and reliability of whole system
- More features such as EM64T, EIST, XD & VT can be easily applied to system by changing processor
- Integrated Intel® GMA 3000 graphics engine that built with high grade display capability
- Lockable cable latched notches of SATA connector that secure connection in vibration condition
- Embedded Intel Active Management Technology (AMT) that remotely discover, heal and protect networked computing assets using third-party management & security applications
- System noise and heat are reduced through more intelligent fan speed control algorithms by integrated Intel® Quiet System Technology
- Flexible design of four external PCI Express x 1 could aggregate as one PCI Express x 4 for storage device thru backplane