
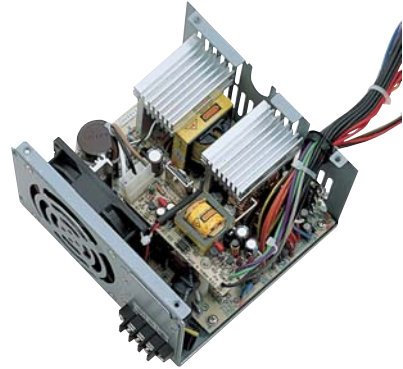


# Power Supply

## BPW-830C

300W DC-DC ATX Power Supply  
Input Range: 19~32VDC

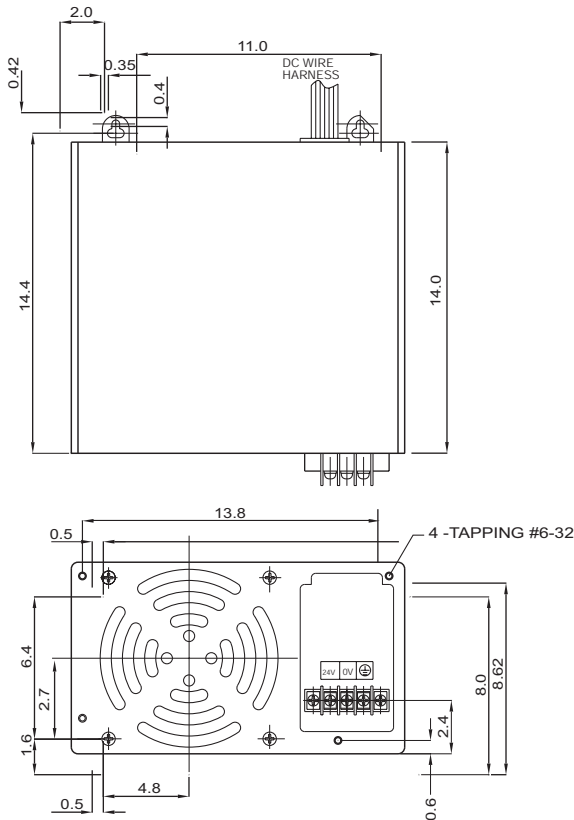

### ★ Specifications

- \* **Input Voltage:** 19~32VDC
- \* **Input Current:** Max. 20A at 24VDC
- \* **Inrush Current:** < 5A at 24VDC input, cold start at 25°C
- \* **Ripple And Noise:** Peak to peak ripple and noise is < 50mV for +5V and +3.3V outputs, < 100mV for other outputs when output voltage is at rated load
- \* **Line Regulation:** < +/-1% for each output measured at rated load and +19~+32V input voltage variables
- \* **Load Regulation:** Output voltage load regulation is less than the value on the table when each output load changes rated loads from +/-40%~60%, with all other outputs at 60% rated load
- \* **Output Power:** Total DC continuous power is within 300W at < 30°C ambient temperature and 24~32V input voltage; max. total combined output power on 3.3V and 5V rails is 150W
- \* **Efficiency:** 65% typical at nominal line and rated load
- \* **Altitude:** 10,000 feet
- \* **Protection Input:** Protection against wrong polarity when 24VDC input is inversely connected by mistake
- \* **Output:** Built-in over voltage protection circuit. Trip point of crowbar circuit is between 5.9~7.0V. Hiccup mode against short circuit or over load conditions auto recovery when faulty conditions are removed
- \* **Temperature:** 0~70°C (operating); 40~+75°C (storage)
- \* **Connectors:**  
Input: Three positions terminal block  
DC Output: Output provides one AT type P8/P9 and two disk drive connector
- \* **Dimensions:** 14.0 x 15.0 x 8.62 cm with +/-0.8mm and +/-0.4mm tolerance between mounting holes
- \* **MTBF:** 116,858 hrs.

Pin	Input	Pin	Output
1	24VDC	Red	+5V
2	0V	Yellow	+12V
3	GND	Brown	-12V
		Grey	P.G.
		Black	GND
		White	-5V
		Orange	+3.3V
		Purple	+5Vsb
		Green	PWR ON

Output	Min. Load	Rated Load	Max. Load	Tolerance
+5V	2A	25A	30A	+/-0.2V
+12V	0.1A	10A	15A	+/-0.6V
-12V	0A	1A	2A	+/-0.6V
-5V	0A	1A	2A	+/-0.25V
+3.3V	0A	8A	15A	+/-0.135V
+5Vsb	0A	0.72A	1.2A	+/-0.25V

### Safety Standards

- \* **Safety:** UL 1950, CSA 22.2 No.234, VDE EN 60 950
- \* **EMI:** FCC Class B, EN55022B
- \* **EMS:** Level 3 of IEC-801, 802, 803, 804

The Industrial PC Authority



## BOSER Technology Co., Ltd.

15F-6, No. 77, Hsin Tai Wu Road, Sec. 1, Hsichih, Taipei Hsien 221 Taiwan TEL : 886-2-26983333 FAX : 886-2-26983300  
<http://www.boser.com.tw> <http://www.isb.com.tw> <http://www.ipc.com.tw> E-Mail: [webmaster@boser.com.tw](mailto:webmaster@boser.com.tw)

U.S.A.  
TEL : +1 650 4280868  
FAX : +1 650 4281172

GERMANY  
TEL : +49 221 954790  
FAX : +49 221 9547988

U.K.  
TEL : +44 1543 466552  
FAX : +44 1543 466553

ITALY  
TEL : +39 051 452042  
FAX : +39 051 455046

KOREA  
TEL : +82 2 34737862  
FAX : +82 2 34743120

ISRAEL  
TEL : +972 3 9203456  
FAX : +972 3 9203535

FRANCE  
TEL : +33 1 69061790  
FAX : +33 1 69433732

FINLAND  
TEL : +358 2 6203753  
FAX : +358 2 6203770

SHANGHAI  
TEL : 021 63676295-7  
FAX : 021 63676286