


VTC292107

VIA EDEN / C3 PRO SAVAGE
TWISTER T EMBEDDED SBC

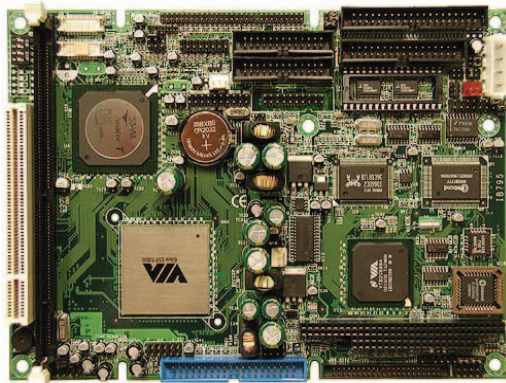

Specification

CPU	VIA Eden 400 or 667 MHz CPU on board
Chipset	North Bridge: VIA VT8606 South Bridge: VIA VT82C686A/B
L2 Cache	CPU integrate
BIOS	Award
Memory	168 pin SDRAM slot x 1 MAX 512 MB
VGA Controller	Integrated in VT8606
Display	Integrated Graphics with 8/16/32 MB frame buffer using system memory support CRT, LVDS out
FDD	Supports up to two 1.44MB FDD
HDD	Supports up to four PATA 100 HDD
USB	1.1 x 2
Solid State Disk	Optional Disk on Chip
PC 104 Connector	Yes
Audio	AC 97'
I/O ports	CRT x 1, LVDS x 1, Pin header for USB x 2 RS232 x 3, RS 232/422/485 x 1, Parallel port x 2 6 pin mini DIN connector for PS2 K/B & Mouse x 1
Expansion Bus	PCI slot x 1
Watchdog Timer	16-Level
Digital I/O	4 in , 4 out
LAN	On board 10/100 Base-T Ethernet
PCB Dimension	203 (W) x 146 (D)mm

Features

- VIA Eden 667MHz Processor
- VT 8606/82C686 A/B
- Up to 512MB DDR SDRAM
- VIA VT8606 Integrated Savage 4
- AGP4X Graphics

Environmental Standard

Operation 0~60°C

Humidity 10~90% (Non-Condensing)

Approval CE, FCC, Class A

Order Information

- * VTC292238
5.25" Embedded SBC with VIA Eden 400 CPU
- * VTC292239
5.25" Embedded SBC with VIA Eden 667 CPU

VoxTechnologies Corp
301 S. Sherman St. Suite # 117
Richardson TX, 75081
United States

Tel: (972) 234-4343
Fax: (972) 234-4295
e-mail: sales@voxttechnologies.com