


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO MILL-MAX MFG. CORP.  
 ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DOCUMENT IS PROHIBITED  
 WITHOUT THE WRITTEN CONSENT OF MILL-MAX MFG. CORP.®

DATABASE NO.	FILE NAME	REV	DATE	DESCRIPTION
--------------	-----------	-----	------	-------------

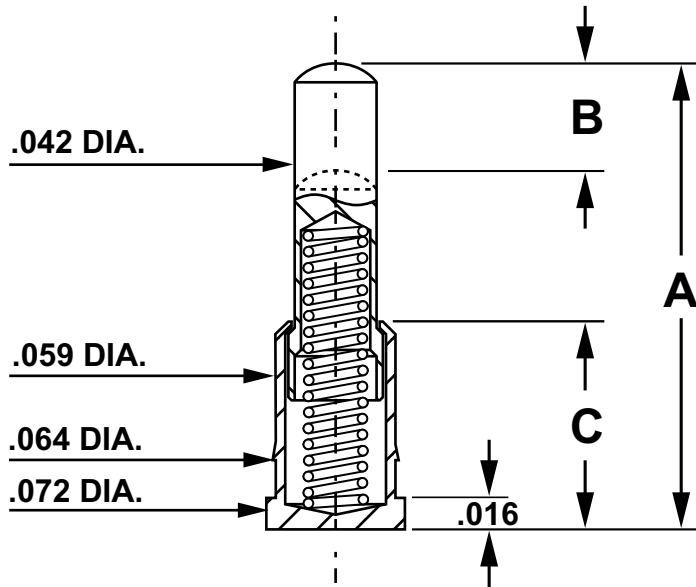

CONTACT STYLE	INITIAL HEIGHT A	STROKE B	C	MILL-MAX PIN #
0	.137	.039	.098	0900-0-00-00-00-00-11-0
1	.177	.055	.106	0900-1-00-00-00-00-11-0
2	.197	.055	.106	0900-2-00-00-00-00-11-0
3	.217	.055	.106	0900-3-00-00-00-00-11-0
4	.236	.055	.106	0900-4-00-00-00-00-11-0
5	.256	.055	.106	0900-5-00-00-00-00-11-0
6	.276	.055	.106	0900-6-00-00-00-00-11-0
7	.295	.055	.106	0900-7-00-00-00-00-11-0

PRE-ASSIGNED PIN

**NOTES:**

1. PISTON & BASE MATERIAL: BRASS ALLOY 360, 1/2 HARD.
2. PISTON & BASE FINISH: 20µ" GOLD OVER 100µ" NICKEL.
3. SPRING MATERIAL: MUSIC WIRE.
4. SPRING FINISH: 5µ" GOLD OVER 50µ" NICKEL.



**MILL-MAX® MFG. CORP.**

P.O. BOX 300, 190 PINE HOLLOW ROAD, OYSTER BAY, NY 11771-0300  
 TEL: (516) 922-6000 FAX: (516) 922-9253 WEB: WWW.MILL-MAX.COM

ALL DIMENSIONS IN INCHES		SCALE	DATE	DRAWN	CHECKED	ENG. APPROVAL	DATE
PIN TOLERANCES BEFORE PLATING	INSULATOR TOLERANCES	—	6-16-03	RFS			
LENGTHS: ±.005	LENGTHS: ±.005	<b>TITLE</b> <b>MODULAR SPRING LOADED CONTACTS</b>					
DIAMETERS: ±.002	THICKNESS: ±.003						
ANGLES: ± 2°	HOLE TO HOLE: ±.001	<b>CUSTOMER APPROVAL</b>		DATE	<b>PROPOSAL NUMBER</b> <b>0900-X</b>		REV
	NON ACCUMULATIVE						