


AR-M9923

Micro Box

Network Security-Firewall/VPN

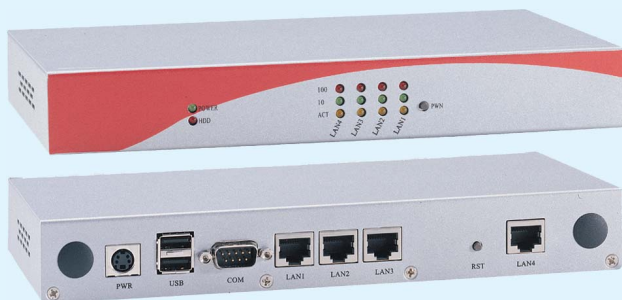

Features

Internet Security Platform with VIA Eden CPU, 4 LANs, Compact Flash, Mini PCI, PCI Slot, USB

VIA Eden

2 USB

Mini PCI

4 LAN

CF

HDDBay

Xfire.acrosser.com.tw

Specification

System:

CPU	VIA Eden
Max. Speed	733 MHz
Chipset	VIA PLE133T+VT82C686B
BIOS	AMI

Memory:

Technology	PC-133 SDRAM
Max. Capacity	128MB (Max. 512 MB)
Socket	144-Pin SO-DIMM

Ethernet:

Interface	10/100Mbps Base-T
Controller	NS 83816 x 4
Connector	RJ-45 x 4

Drive Bay:

2.5" HDD	1 (Option)
----------	------------

Cooling:

System FAN	1
------------	---

I/O Interface:

	Internal Interface	External Interface
USB		2 (USB 1.1 compliant)
Serial	1 (RS232)	1 (RS232)
Mini PCI Interface	1 (3.3V Mini PCI connector)	
VGA interface	1 (5 x 2 pin header connector)	
PS/2		Mouse x 1, Keyboard x 1
GPIO	1 TTL 8-bit input and 8 bit output	
Control		Power Bottom
Solid State Disk	1 (Compact Flash Type I)	

Management:

Indicator	1xPower LED, 12 LEDs for Network connector as ACT and 10/100Mbps
-----------	--

Miscellaneous:

Watchdog Timer	Software programmable 1~63 seconds
----------------	------------------------------------

Environment:

Operating Temperature	0 ~ 40°C (32 ~ 104 °F)
Storage Temperature	-20 ~ 80°C(-4 ~ 176 °F)
Operating Humidity	0 ~ 90% Relative humidity non-condensing
Power Adaptor	27W External Power Adaptor

Physical:

Dimension (W x D x H)	242 x 148 x 34 mm (9.5"x 5.8" x 1.3")
-----------------------	---------------------------------------

Packing List:

Utility CD, Manual

Ordering Information

Standard:

AR-M9923	Internet Security Platform with VIA Eden 600 MHz CPU 4 LANs, Compact Flash, Mini PCI, USB
----------	--

Option:

150010045	Power 27W AC100V/240V
190030158-01	VGA Cable
190030195	Keyboard+Mouse Cable
190030213	2.5" HDD Cable
190030388	DB-9 to DB-9 Console Cable
170010420	2.5" HDD Bracket fixing 170020888*6+170020088*3
190020012	AC Power Cord for European Type
190020013	AC Power Cord for US Type
190020014	AC Power Cord for UK Type
190020015	AC Power Cord for AU Type

Specifications are subject to change without notice.