


15 WATT AC-DC CONVERTER

MRM-SB SERIES


MRM**SB Specification

Specifications<AC/DC>	Model				
MRM**SB 15W ATTS /S INGLE	MRM05SB-U	MRM12SB-U	MRM15SB-U	MRM24SB-U	MRM48SB-U
Input Characteristic					
Input Voltage	AC230V				
Input Current	0.25A				
Input Range	AC170-264V(DC220-350V)				
Input Frequency	50/60Hz				
Input Frequency Range	47-440Hz				
Phase	Single				
Inrush Current *1	20A(maximum)at AC230V				
Efficiency [%] (typical) *2	73	75	75	76	80

Block Diagram

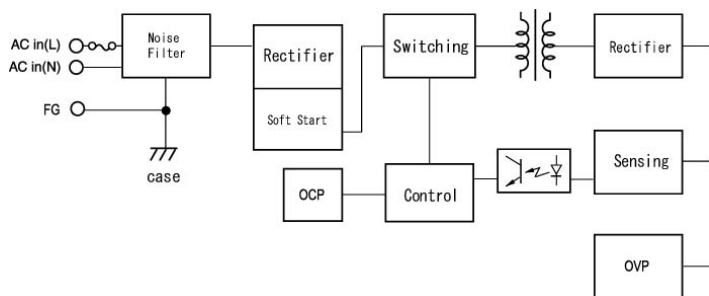

Efficiency Curve

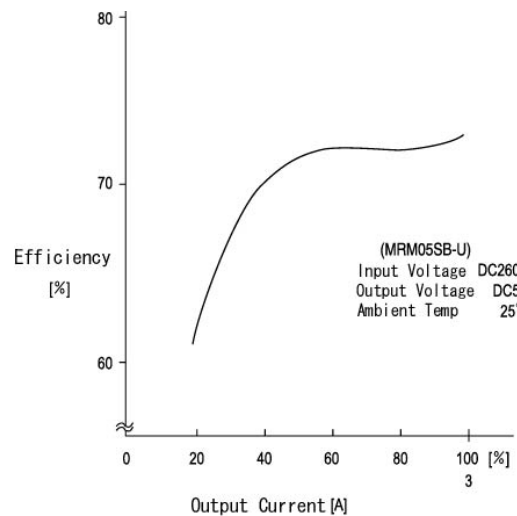

MRM**SB Specification

Specifications<AC/DC>	Model				
MRM**SB 15WATTS/SINGLE	MRM05SB-U	MRM12SB-U	MRM15SB-U	MRM24SB-U	MRM48SB-U
Input Characteristic					
Input Voltage	AC230V				
Input Current	0.25A				
Input Range	AC170-264V(DC220-350V)				
Input Frequency	50/60Hz				
Input Frequency Range	47-440Hz				
Phase	Single				
Inrush Current *1	20A(maximum)at AC230V				
Efficiency [%] (typical) *2	73	75	75	76	80
Output Characteristic					
Output Voltage [V]	5	12	15	24	48
Output Current [A]	3.0	1.3	1.0	0.70	0.35
Voltage Adjust Range	+/- 10% of Rated Output Voltage(at no load within the input range)				
Ripple and Noise [mVp-p](maximum) *3	150	220	250	340	580
Regulation					
a.Statistic Line Regulation [mV](maximum)	40	96	120	192	384
b.Statistic Load Regulation [mV](maximum)	50	120	150	240	480
c. Temperature Coefficient *4	0.03%/°C				
d.Drift[mV](maximum) *5	40	75	90	135	255
e.Dynamic Load Regulation [mV](typical) *6	150	360	450	720	1440
f.Recovery Time *6	0.3mS(Typical)				
Rise up time	500mS(maximum) at 25°Cand rated input/output				
Hold up time	20mS(minimum) at 25°Cand rated input/output				
Functions					
Overcurrent Protection \geq 10% of Rated Output Current[A]	Current Limiting with automatic recovery				
	3.90	1.69	1.30	0.91	0.46
Overvoltage Protection \geq 10% of Rated Output Voltage[V]	Zener diode clamping				
	5.75	13.8	17.3	27.6	55.2
Remote Sense	not available				
Remote On/Off	not available				
Environmental					
Operating Temperature **7	-5 to +50°Cenclosed type: -5 to +40°C				
Operating Humidity	30 to 85%RH(non-condensing)				
Storage Temperature	-20 to +85°C				
Storage Humidity	10 to 85%RH(non-condensing)				
Withstanding Voltage	Primary-Secondary AC3,000V for 1minute				
	Primary-Frame Ground AC2,500V for 1minute				
	Secondary-Frame Ground AC500V for 1minute				
Isolation Resistance	Primary-Secondary-Frame Ground 50M Ω (minimum) by DC500V insulation tester				
Vibration	5-10Hz:10mm double amplitude 10-55Hz:19.6m/s ² 20minutes' period for 60minutes each along X,Y,Z axes(non-operating)				
Shock	294m/s ²				
Cooling	Convection				
? Leakage Current	1mA(maximum) at 25°Crated input/output and rated input frequency				
? Conducted line noise	Built to meet VDE0871 Class B				
? Safety	UL:UL1950				
	C-UL:CSA C22.2 No.234(Level 3)				
	VDE:EN60950,IEC950,VDE0805				
Weight (typical)	200g/enclosed type:220g				
? MTBF [H]	750,000				
? Switching Frequency[kHz](typical) *8	50	70		50	70

Conditions:

*1 at cold start

*2 at DC260V input and rated output

*3 measured by a bayonet probe at the end of a pair of 20cm long wires terminated with a 47 μ F electrolytic capacitor and a 0.1 μ F film capacitor in parallel at a 0 to 100MHz bandwidth


*4 at -5 to +50°Cenclosed type: at -5 to +40°C

*5 for 7hour period after 1hour warm-up at 25°Cand rated input/output



*6 when output current changed from 25% to 75% of rated output current rapidly at AC200V input

*7 safety approved at 25°C

OCP Curve

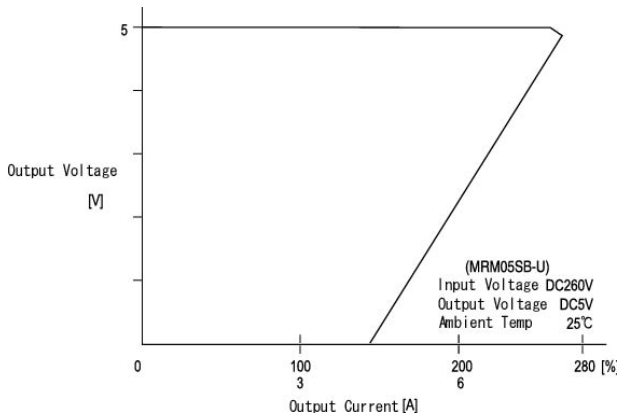

Derating Curve

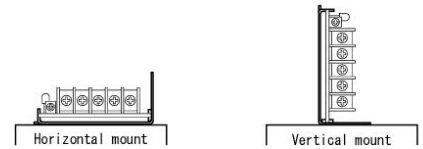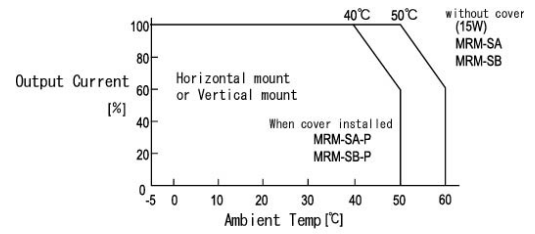

Dimension (mm)

