

# LB1000 Series and LB2000 Lock Boxes

## VERTICAL/HORIZONTAL, TAMPER-RESISTANT

### Product Features

- Vented Side Panels
- Conduit Knockouts
- Pre-Wired, Filtered Fan Assembly
- Pre-Wired AC Cord (except LB1000DC)
- LB1000, LB1012, and LB2000 Have Two AC Duplex Outlets (One Internal, One External) Internally Fused for Accessories
- LB1000DC Has Three Terminal Blocks (Two Internal, One External) Internally Fused for Accessories
- Lock Boxes Can Be Stacked or Daisy-Chain Together
- Two 1-Inch (2.54 cm) Grommeted Cable Ducts




The **LB1000 Series** horizontal lock box is designed to provide high security protection for top- or front-loading VCRs. These lock boxes maintain security integrity for all tape recordings by means of a metallic front panel with tamper-resistant lock. The smoked acrylic window in the front panel allows complete viewing and monitoring of the unit during recording and operation.

The **LB1000** and **LB1000DC** are designed for use with a single VCR. The **LB1012** includes mounting brackets to accommodate an additional VCR, quad, or switcher. The brackets may be removed to accommodate a single, larger recorder.

Front-loading VCRs can be easily accessed by unlocking the forward-opening front panel. The gas-strut, hinged lid provides convenient access to all top-loading VCRs.

The **LB2000** is a vertical lock box designed to provide security protection for "tower type" computer disk drives or other vertically standing devices. The **LB2000** also has a smoked acrylic viewing window and forward-opening front panel with tamper-resistant lock for convenient access.

Added features such as vented side panels and a continuous-duty fan assembly help maintain an ambient operating temperature in all AC models; the **LB1000DC** is equipped with a 12 VDC thermostatically controlled heater and fan.

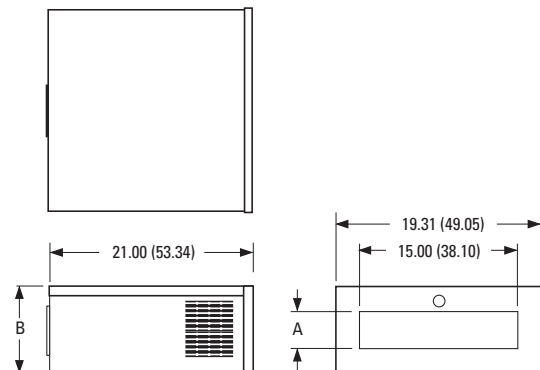

	LB1000, LB1000DC	LB1012
A	3.50 (8.89)	7.50 (19.05)
B	8.10 (20.57)	12.00 (30.48)
INSIDE USABLE DIMENSIONS*:		
W	18.00 (45.72)	18.00 (45.72)
H	7.75 (19.68)	11.50 (29.21) - ONE UNIT 5.50 (13.97) - TWO UNITS
D	18.25 (46.36)	18.25 (46.36)

\* MOUNTING BRACKETS IN LB1012 WILL ACCOMMODATE ONE ADDITIONAL DEVICE WITH THE FOLLOWING DIMENSIONS:  
 W = 15.00 (38.1) MINIMUM  
 18.00 (45.72) MAXIMUM  
 H = 5.50 (13.97)  
 D = 17.50 (44.45)

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES.

#### LB1000/LB1012 DIMENSION DRAWING



# TECHNICAL SPECIFICATIONS

## MODELS

LB1000	Horizontal lock box with 120 VAC, 60 Hz continuous-duty fan for top- or front-loading VCRs.
LB1000DC	Same as LB1000 except has three 3-position DC terminal blocks and 12 VDC thermostatically controlled heater and fan.
LB1012	Larger capacity horizontal lock box for one or two VCRs. Mounting brackets can accommodate an additional VCR or quad with a minimum width of 15 inches (38.1 cm) and maximum height of 5.5 inches (13.9 cm).
LB2000	Vertical lock box for "tower type" computer disk drives and vertically standing devices.

## ELECTRICAL

Power Connection LB1000DC	Three, 3-position terminal blocks (two internal, one external) internally fused
All AC Models	Input power cord plus two AC duplex power outlets (one internal, one external) internally fused
Cooling LB1000DC	Internal 12 VDC fan, thermostatically controlled, turns on at 100°F (37°C) and off at 70°F (21°C)
All AC Models	Internal 4-inch (10.16 cm) square fan, continuous duty, 120 VAC
Heating LB1000DC only	12 VDC, 20 watts, thermostatically controlled, turns on at 40°F (4°C) and off at 60°F (15°C)
Fusing LB1000DC LB1000, LB1012, LB2000	5A, Type 3AG  3A, Type 3AG


## GENERAL

Cable Entry LB1000 Series	Four conduit knockouts punched for 0.50-inch (1.27 cm) or 0.75-inch (1.90 cm) holes
LB2000	Two 1-inch (2.54 cm) grommeted cable ducts Two 0.50-inch (1.27 cm) conduit knockouts Two 1-inch (2.54 cm) grommeted cable ducts

Front Viewing Window Window Viewing Area LB1000, LB1000DC	0.25-inch (6.35 mm) thick smoked acrylic  15.00" W x 3.50" H (38.1 x 8.89 cm)
LB1012	15.00" W x 7.50" H (38.1 x 19.05 cm)
LB2000	6.00" W x 20.50" H (15.24 x 52.07 cm)
Top Lid Assist Construction Finish	Gas strut (except LB2000) 16-gauge cold-rolled steel Black polyester powder coat
Unit Weight	
LB1000	29.9 lb (13.60 kg)
LB1000DC	29.06 lb (13.18 kg)
LB1000MT	7.89 lb (3.58 kg)
LB1012	36.2 lb (16.29 kg)
LB2000	42.3 lb (19.22 kg)
Shipping Weight	
LB1000	38 lb (17.21 kg)
LB1000DC	37 lb (16.76 kg)
LB1000MT	12 lb (5.43 kg)
LB1012	45 lb (20.38 kg)
LB2000	55 lb (24.91 kg)

## OPTIONAL ACCESSORIES

LB1000MT	Wall mount kit for LB1000 Series
----------	----------------------------------

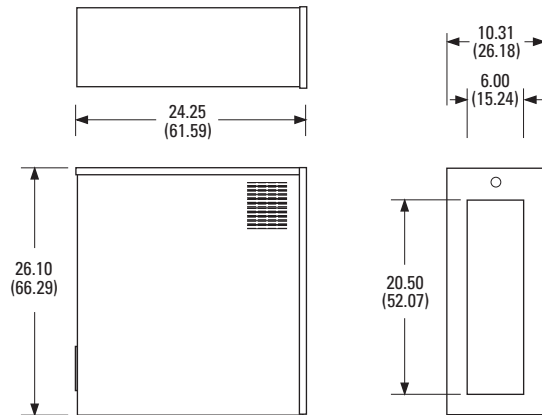

INSIDE USABLE DIMENSIONS:	
W	9.50 (24.13)
H	20.50 (52.07)
D	20.50 (52.07)

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS;  
ALL OTHERS ARE INCHES.

### LB2000 DIMENSION DRAWING



**Pelco, Inc. Worldwide Headquarters:**  
3500 Pelco Way, Clovis, California 93612-5699 USA  
**USA & Canada** Tel: (800) 289-9100 • FAX: (800) 289-9150  
**International** Tel: +1 (559) 292-1981 • FAX: +1 (559) 348-1120  
[www.pelco.com](http://www.pelco.com)

Pelco and the Pelco logo are registered trademarks of Pelco, Inc.  
Product specifications and availability subject to change without notice.  
©Copyright 2004, Pelco, Inc. All rights reserved.