


# RACK-260

## 2U Height ATX Main Board Industrial PC Chassis

RACK

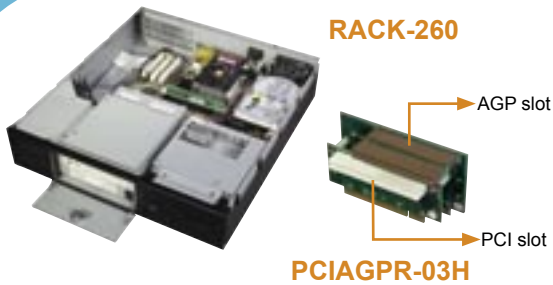

RACK-260

PCIAGPR-03H

### SPECIFICATIONS

- ◆ 2U Height 19" Rack mounting chassis
- ◆ Drive bays : 1 x 5.25" CD-ROM, 1 x 3.5" FDD, 2 x 3.5 HDD
- ◆ Two 8cm cooling fan
- ◆ Support standard ATX and micro ATX Main Board
- ◆ Support three half size PCI add-on cards
- ◆ Support Power Supply: standard equipped with ACE-832A Power Supply
- ◆ Optional PS/2 size AT/ATX power supply
- ◆ Vibration: 5~17Hz, 0.1" double amplitude displacement  
17~640 Hz, 1.5G acceleration part to part
- ◆ Shock : 10G acceleration part to part (11ms)
- ◆ Operating temperature : 0~50°C
- ◆ Color: Black (PANTONE Black C) , White (PANTONE 413C)
- ◆ Dimension: 431mm(W) x 88.5mm(H) x 480mm(D)
- ◆ Net/GW (kg): 10/13

### ORDERING INFORMATION

- RACK - 260  / ACE - 832A : 2U Height Main board Industrial PC Chassis with ACE-832A power supply

Color Code B=Black W=White

Option: PCIR-03

Three PCI slot riser card

PCIAGPR-03H

One PCI slot and one AGP slot riser card

# RACK-220A/224A

## 2U Chassis



RACK-220AB



Lockable Door to protect disk access and power ON/OFF



Top View

### SPECIFICATIONS

- ◆ 2U height 19" Rack mounting chassis
- ◆ Designed with fan fault detecting system
- ◆ Front panel locking door system protects disk access and power on/off switches
- ◆ Drive Bays: 1 x 3.5" FDD; 1 x 5.25" Drive; 1 x 3.5" HDD
- ◆ One 8cm cooling fan with removable filter
- ◆ Optional backplane: BP-5SD, PCI-5SD3, PCI-5SD5, PCI-5SD6, PCI-6SR, IP-5SD3, IP-5SD5 (RACK-220A)
- ◆ RACK-224A Supports PCI64-5SD 64-bit backplane
- ◆ Supports power supply: PS/2 size AT/ATX power supply
- ◆ Vibration: 5 ~ 17Hz, 0.1" double amplitude displacement  
17 ~ 640Hz, 1.5G acceleration peak to peak
- ◆ Shock: 10G acceleration peak to peak (11ms)
- ◆ Colors: Black (PANTONE Black C) or White (PANTONE 413C)
- ◆ Dimensions: 431(W) x 88(H) x 473(D)mm; (17" x 3.5" x 18.6")
- ◆ Net/GW (kg): 9/12

### ORDERING INFORMATION

- RACK-220A  / ACE-920A: 2U rackmount chassis with ACE-920A power supply

- RACK-224A  / ACE-832A: 2U rackmount chassis with ACE-832A power supply w/o backplane

Option: PS/2 size AT / ATX PSU

Color CODE: B=Black; W=White  =Power supply module

# RACK-305A

## 4U 14-Slot Chassis



Rackmount hand



5.25" to Drive Bay



RACK-305A

### SPECIFICATIONS

- ◆ 4U height 19" Rack mounting chassis
- ◆ Front panel with lockable door to protect the running system
- ◆ Two reset buttons for dual system applications
- ◆ AT type KBD connector on front panel with key-lock
- ◆ Drive Bays: 1 x 3.5" FDD, 3 x 5.25" Drive, 1 x 3.5" HDD
- ◆ Two 8cm cooling fans with removable filter
- ◆ Designed with an anti-vibration card clamp that keep system stable
- ◆ Supports ATX form factor PC motherboard
- ◆ Supports backplane: PCI-14S3, PCI-14S2, PCI-14S, PX-14S5, PX-14S3, PX-14S2, IP-14S3, IP-14S, BP-14S/SD2/SD/15S, PCI-13SD, IP-13SD, IPX-13S, PCIAGP-13S2, PCIAGP-13S3, PXAGP-12S2, PXAGP-13S, PXAGP-13S3
- ◆ Supports power supply: PS/2 size AT/ATX SPS (ACE-93x/92x/916V series and ACE-828 series) or ACE-C232 mini redundant power supply
- ◆ Optional rack-mount slide: 24" or 18"
- ◆ Vibration: 5 ~ 17Hz, 0.1" double amplitude displacement  
17 ~ 640Hz, 1.5G acceleration peak to peak
- ◆ Shock: 10G acceleration peak to peak (11ms)
- ◆ Colors: Black (PANTONE Black C) or White (PANTONE 413C)
- ◆ Dimensions: 431(W) x 176(H) x 413(D)mm; (17" x 6.9" x 16.3")
- ◆ Net/GW (kg): 12/15

### ORDERING INFORMATION

- RACK-305A  / ACE-925A 4U 14-slot rackmount chassis with ACE-925A power supply

- RACK-305A  ATX/ACE-828A 4U ATX MB rackmount chassis with ACE-828A power supply

- RACK-305A  R/ACE-C232 4U 14-slot rackmount chassis with ACE-C232 redundant power supply

Color Code : B: Black W: White