


Industrial Panel PC

BPC-3610C

10.4" Industrial Panel PC with Embedded Engine Board, CompactFlash Reader, Wireless LAN & Touch Screen

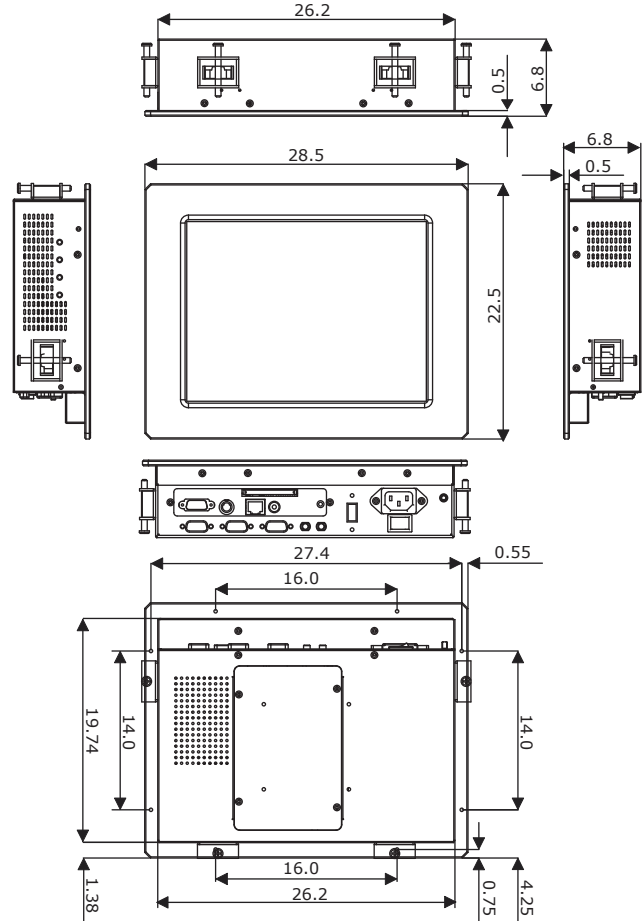

■ Features

- Aluminum chassis
- 10.4" high brightness TFT color panel display
- Built-in touch screen, HS-2605 SBC, Eden 667MHz CPU, 64MB SO-DIMM, 2.5" 20GB HDD, 70W/80W DC P/S
- VIA VT8606 display controller
- RealTek RTL8100 and wireless LAN module
- AC97 3D audio controller
- Three COM, one USB port
- DiskOnChip socket supporting memory sizes of up to 288MB
- Supports CompactFlash card adapter (optional)

■ Panel Specifications

- ***Screen Size:** 10.4 inches
- ***Display Format:** 800 x 600 pixels
- ***Pixel Pitch:** 0.264(H) x 0.264(V) m/m
- ***Brightness:** 200 cd/m²
- ***MTBF:** 25,000 hrs.

■ Ordering Guide

- **BPC-3610C**
10.4" Panel PC w/10.4" TFTPanel, Touch Screen, HS-2605 SBC (w/667MHz CPU + cooler), CF, 64MB SO-DIMM, 2.5" 20G HDD, 70W P/S
- **BPC-3610C(DC)**
10.4" Panel PC w/10.4" TFTPanel, Touch Screen, HS-2605 SBC (w/667MHz CPU + cooler), CF, 64MB SO-DIMM, 2.5" 20G HDD, 80W DC P/S

Accessory Options:
Wireless LAN Module, DOC

■ Specifications

- ***System Board:** HS-2605 industrial embedded engine board
- ***CPU:** VIA Eden 667MHz low power embedded CPU
- ***Memory:** One SO-DIMM socket supporting up to 256MB
- ***CompactFlash:** One, Type II IDE interface adapter
- ***Touch Screen:** 10.4" resistive touch screen
- ***VGA:** VIA VT8606 display controller
- ***LAN:** RealTek RTL8100 10/100 Based LAN
- ***Wireless LAN:** Provides wireless LAN module
- ***Audio:** AC97 3D audio controller
- ***HDD/FDD/CD-ROM:** One 2.5" 20GB HDD
- ***Serial Port:** One RS-232/422/485 and two RS-232, OR three RS-232
- ***USB:** One USB port
- ***Keyboard/Mouse:** PS/2 6-pin Mini DIN
- ***DiskOnChip:** DiskOnChip socket supporting memory sizes of up to 288MB
- ***BIOS:** AMI PnP Flash BIOS
- ***Watchdog Timer:** Sets 1/2/10/20/110/220 seconds activity trigger with Reset or NMI
- ***Power Supply:** 70W or 80W DC power supply
- ***Temperature:** 0~+45°C (operating); -20~+70°C (storage)
- ***Dimensions:** 28.5(L) x 6.8(W) x 22.5(H) cm



ISO-9001
Certification

Intel®
Communications
Alliance
Affiliate Member



Architectural Expertise
Beyond IPC

BOSER Technology Co., Ltd.

15F-6, No. 77, Hsin Tai Wu Road, Sec. 1, Hsichih, Taipei Hsien 221 Taiwan TEL: 886-2-26983333 FAX: 886-2-26983300
http://www.boser.com.tw / http://www.ipc.com.tw E-mail: webmaster@boser.com.tw / sales@boser.com.tw

U.S.A	North America	Germany	U.K.	Italy	Korea	Israel	France	Finland	India	South Africa	Brasil	Shanghai/Beijing
TEL: +1 650 9673898	TEL: +1 603 8863900	TEL: +49 221 954790	TEL: +44 1543 462146	TEL: +39 051 452042	TEL: +82 2 32823999	TEL: +972 3 9203456	TEL: +33 1 69061790	TEL: +358 2 6203753	TEL: +91 657 3107955	TEL: 011 4621320	TEL: +55 51 21283003	TEL: 021 51098750
FAX: +1 650 4281172	FAX: +1 603 8864545	FAX: +49 221 9547388	FAX: +44 1543 466553	FAX: +39 051 455046	FAX: +82 2 32823992	FAX: +972 3 9203535	FAX: +33 1 69433732	FAX: +358 2 6203770	FAX: +91 657 2433941	FAX: 011 7043421	FAX: +55 51 21283017	FAX: 021 63456286