

3612T Industrial PC

12.1" LCD Flat Panel Display

DS-361200(A)



FEATURES

- 12.1" SVGA TFT color flat panel
- Analog resistive touchscreen front panel
- Intel® Celeron® and Pentium® III options up to 1.26GHz
- Up to 512 MB DRAM
- 10/100 Base T Ethernet port
- RS-232 port
- RS-232 or RS485 port
- PS/2 keyboard and mouse port
- USB port
- VGA port (supports simultaneous display with additional monitor)
- Four available expansion slots:
 - ♦ Three ¾-length (1 PCI, 1 ISA, and 1 either ISA or PCI)
 - ♦ One ½-length PCI
- DOC 2000 socket
- CD-ROM and Floppy with optional CD-R/W upgrade
- Easily removable 20 GB hard drive
- Secondary IDE Drive options (choice of one):
 - ♦ Dual hard drives
 - ♦ Externally accessible CompactFlash™ options up to 512MB
 - ♦ External Drive bay connector for 9000-XBAY
- NEMA 4/4x/12 and IP65 front panel
- UL listed for hazardous locations: Class I Division 2, Groups A, B, C, D; Class II Division 2, Groups F and G
- Pre-loaded with MS-DOS®, Windows 98®, Windows® NT, or Windows® 2000 (with multi-language support)

Xycom Automation's newest generation of industrial PCs are designed and tested for the tough environments required for plant floor use. Our standard PC configurations meet the strict specifications required for use in hazardous locations and Europe's CE mark. Based on CPU boards designed specifically for industrial automation, these systems provide the capabilities required by demanding applications. With an installed base of over 200,000 systems, our industrial PC products are successfully applied in manufacturing and process environments world-wide.

Easy-to-Read Display

The 3612T utilizes a bright TFT 12.1" LCD flat panel display. Complex operations and screens can be displayed with clarity. SVGA (800 x 600) resolution is recommended. However the 3612T will display XGA (1024 x 768) resolution with some clarity degradation. The AGP graphics defaults to 4MB video RAM and will automatically share RAM with the system to allow full 32-bit color depth.

Higher Performance

With up to 1.26GHz Pentium III processors available the 3612T can drive the most demanding applications. The 3612T ships standard with an 850 MHz Celeron with 128K cache

running at 100 MHz bus. Optional 1.0 GHz with 256K cache and 1.26GHz with 512K cache, both running at 133 MHz bus, are available options.

Fits Your Needs

The 3612T can be configured many different ways. With four available expansion slots (three ¾-length ISA/PCI, one ½-length PCI), many cost effective, industry standard options are easily integrated. The optional dual hard drive, externally accessible Compact Flash, or external drive bay connector provide the storage solution you require. Additionally the CD-ROM can be upgraded to a read/write drive so that even more storage and/or backup options are available.


The optional 9000-XBAY allows you to externally mount any two IDE devices without requiring a power supply or unreliable cabling.

Meets High Standards

To survive on the plant floor, the 3612T meets NEMA 4/4x/12, IP65, FCC, UL, cUL, and European CE mark requirements for industrial automation equipment. Xycom Automation leads the industry in reliability, service, and support with an optional five year warranty available.

SERVICEABILITY

The 3612T CPU section easily removes from the front panel and display unit without having to detach the front panel from the NEMA enclosure. One connector is used to attach the entire front panel. The rear CPU section can be replaced with another very quickly. With the cover removed expansion cards are easily installed without cumbersome cables to contend with.

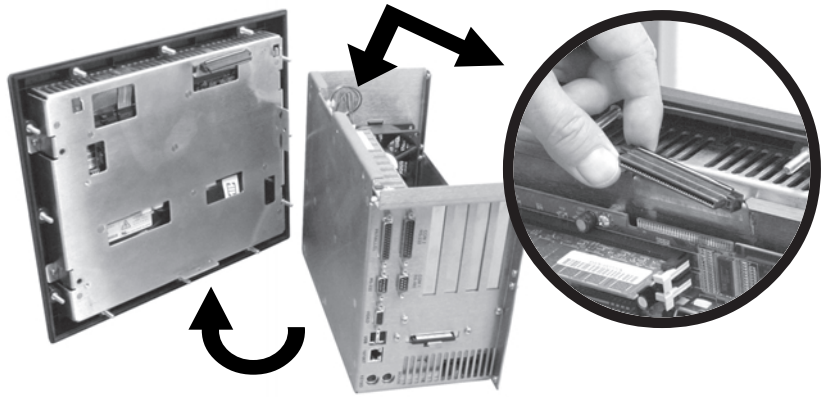

EASILY REPLACEABLE HARD DRIVE




The 3612T has incorporated an easy access hard drive mount. Simply remove 2 screws and extract the hard drive. Remove the metal bracket and retention spring, attach it to the new hard drive and install your replacement.

SECONDARY DRIVE OPTIONS


The 3612T has several options for the secondary IDE port on the CPU. The hard drive can be replaced with a dual hard drive unit for redundancy. If solid state storage media is desired than an externally accessible Type I or Type II CompactFlash™ option is available. If a DVD, Tape backup, or other IDE device is required than an external connector for a remote drive bay can be ordered.



External Bay Connector



Dual 2.5" Hard Drives

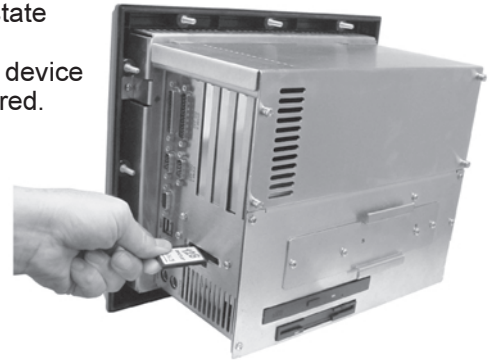

Externally Accessible CompactFlash™


REMOTE DRIVES



With the external bay connector (shown above) installed, the 9000-XBAY* can be utilized. The 9000-XBAY allows any two IDE devices to be installed and connected to the 3612T via a single cable. This cable carries power and the IDE signals so that one connection is all that is needed (some devices may require an additional power supply* to be utilized). The 9000-XBAY can be mounted on a shelf, behind a panel, or used with a NEMA door (optional).

*9000-XBAY and external power supply are both sold separately.


PRODUCT MOUNTING AND DIMENSIONS

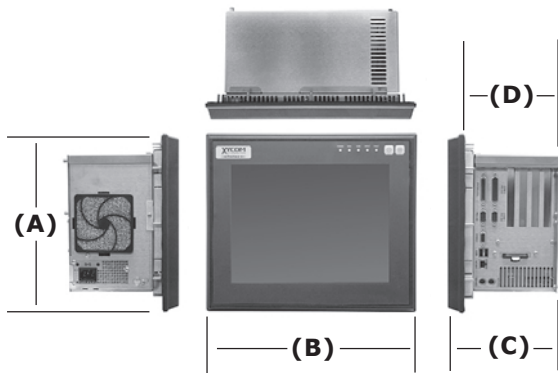

Model	3612T
Display	12.1" LCD color display, 800 x 600 (SVGA), 300 nits
Operator Input	Analog resistive touchscreen
Processors	Intel® Celeron, Pentium® III
Preloaded OS	MS-DOS®, Windows NT®, Windows® 98, 2000
Expansion	One ISA, two PCI, one shared (ISA or PCI)

3612T Unit Dimensions

Model	3612T
Height (A)	11.20" (279.4 mm)
Width (B)	13.20" (330.2 mm)
Depth (C)	7.36" (187.0 mm)
Mounting Depth (D)	6.36" (161.5 mm)
Weight	16 lbs (7.2 kg)

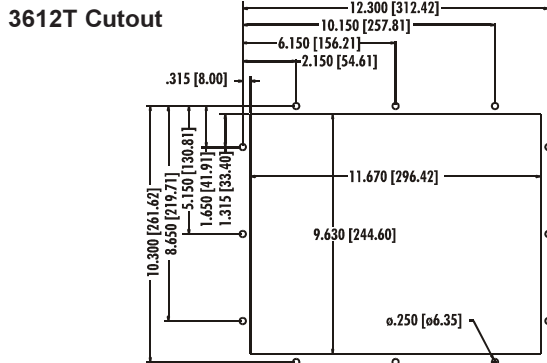

PRODUCT SPECIFICATIONS AND RATINGS

Environmental

	Operating	Nonoperating
Thermal	0°C to 50°C	-20°C to 60°C
Humidity	20% to 80% RH, noncondensing	20% to 80% RH, noncondensing
Shock ^a	15g peak acceleration, 11 msec duration	30g peak acceleration, 11 msec duration
Vibration	.006" peak to peak displacement	.015" peak to peak displacement
5-2000 Hz ^a	1.0g maximum acceleration	2.5g maximum acceleration
Altitude	Sea level to 10,000 ft.	Sea level to 40,000 ft.

^a These values are with solid state hard drives and not rotating media drives.

Electrical

Power Supply	90 watt AC		
AC Power	100 - 132/200 - 240 V AC, switchable, 50/60 Hz, 4.0 Amp (maximum)		
Available Expansion Power	26 watts maximum	+5V@3.4A ^a +3.3V@1.58A ^a -5@160mA ^b -12@160mA ^b +12@0.58A	^a +5V and +3.3V cannot exceed 17 watts. ^b -5V and -12V cannot exceed 2 watts.

Compliance

Regulatory Compliance

- CE**
- EN 55022: Class A
 - EN 61000-6-2
 - EN 60950
- FCC**
- 47 CFR, Part 15, Class A

Safety Agency Approvals

- UL**
- UL 60950
 - UL 1604
- CUL**
- CSA-C22.2, #950
 - CSA-C22.2, #213

Front Panel

- NEMA 4/4X/12, IP65


Product certification documentation available at:
www.xycom.com/certifications

ORDERING INFORMATION

To create an order number, follow the conventions defined by the example order numbers and product configurations.

Example Order Number

Order Number	Description
3612T-850-128-CDF	3612T with Touchscreen front panel, Socket 370 Intel Celeron 850 MHz CPU (128K Cache, 100 MHz bus), 128 MB DRAM, 20 GB minimum Hard Drive, Rear Access CD-ROM and Floppy, MS-DOS, On-board 10/100 Ethernet and USB, two PCI, one ISA, and one PCI or ISA 3/4-length available expansion slots.

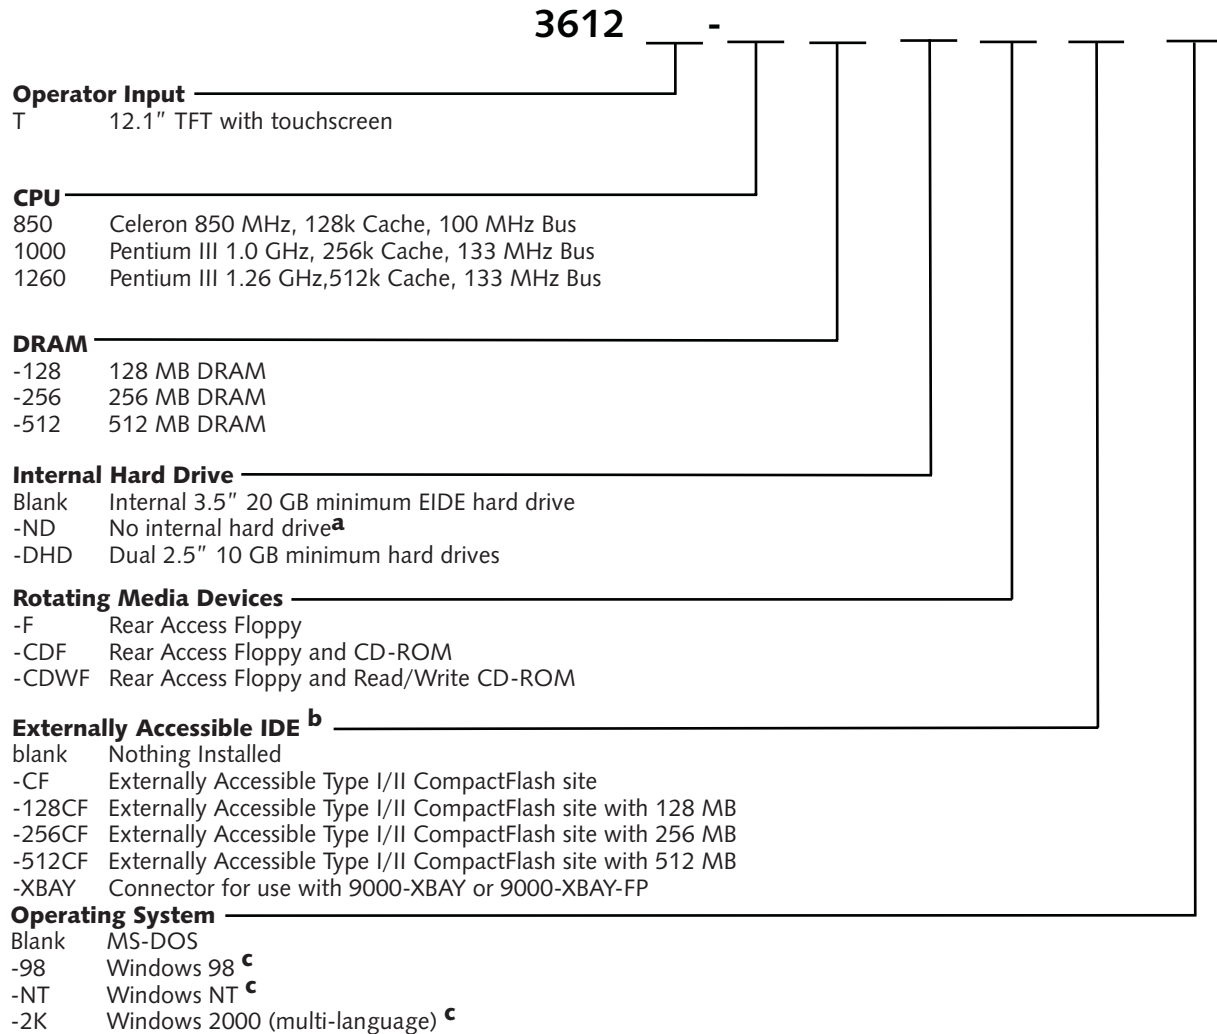

^a 128CF, 256CF, or 512CF (with DOS) option must be chosen when selecting the -ND option.

^b Externally accessible options are not available when choosing -DHD option.

^c Windows operating systems are only available when Internal Hard Drive or -DHD options are chosen.

Xycom Automation, Inc.
 750 North Maple Rd.
 Saline, MI 48176-1292
 Phone: 734-429-4971
 Fax: 734-429-1010
<http://www.xycom.com>



© 2002 Xycom Automation, Inc. Is a wholly owned subsidiary of Pro-face America, Inc. Specifications may change without notice. Xycom Automation is a trademark of Xycom Automation. Other brand or product names are the property of their respective owners.